




Karndean
Designflooring


Product Selector

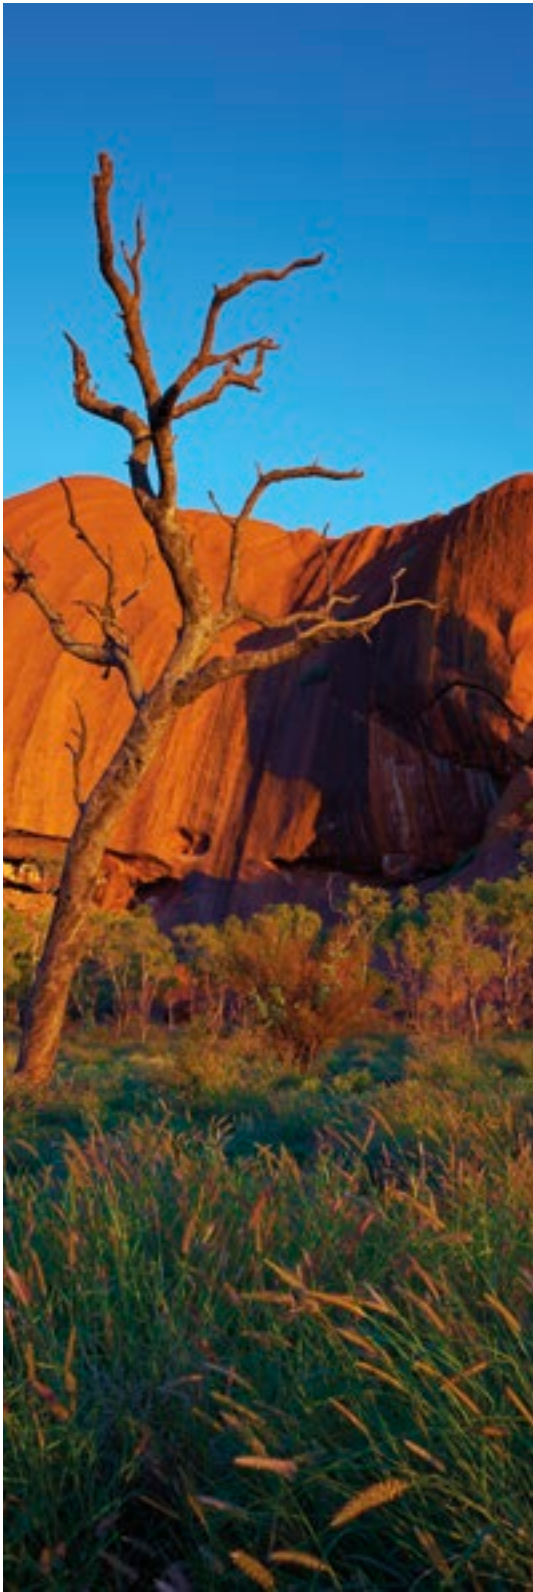

Cover image: Tenebra Walnut **WP330** and Fumo **SP216** with DS07 3mm and 10mm design strips

We see flooring
differently...

Seeking
expressive and
intriguing forms

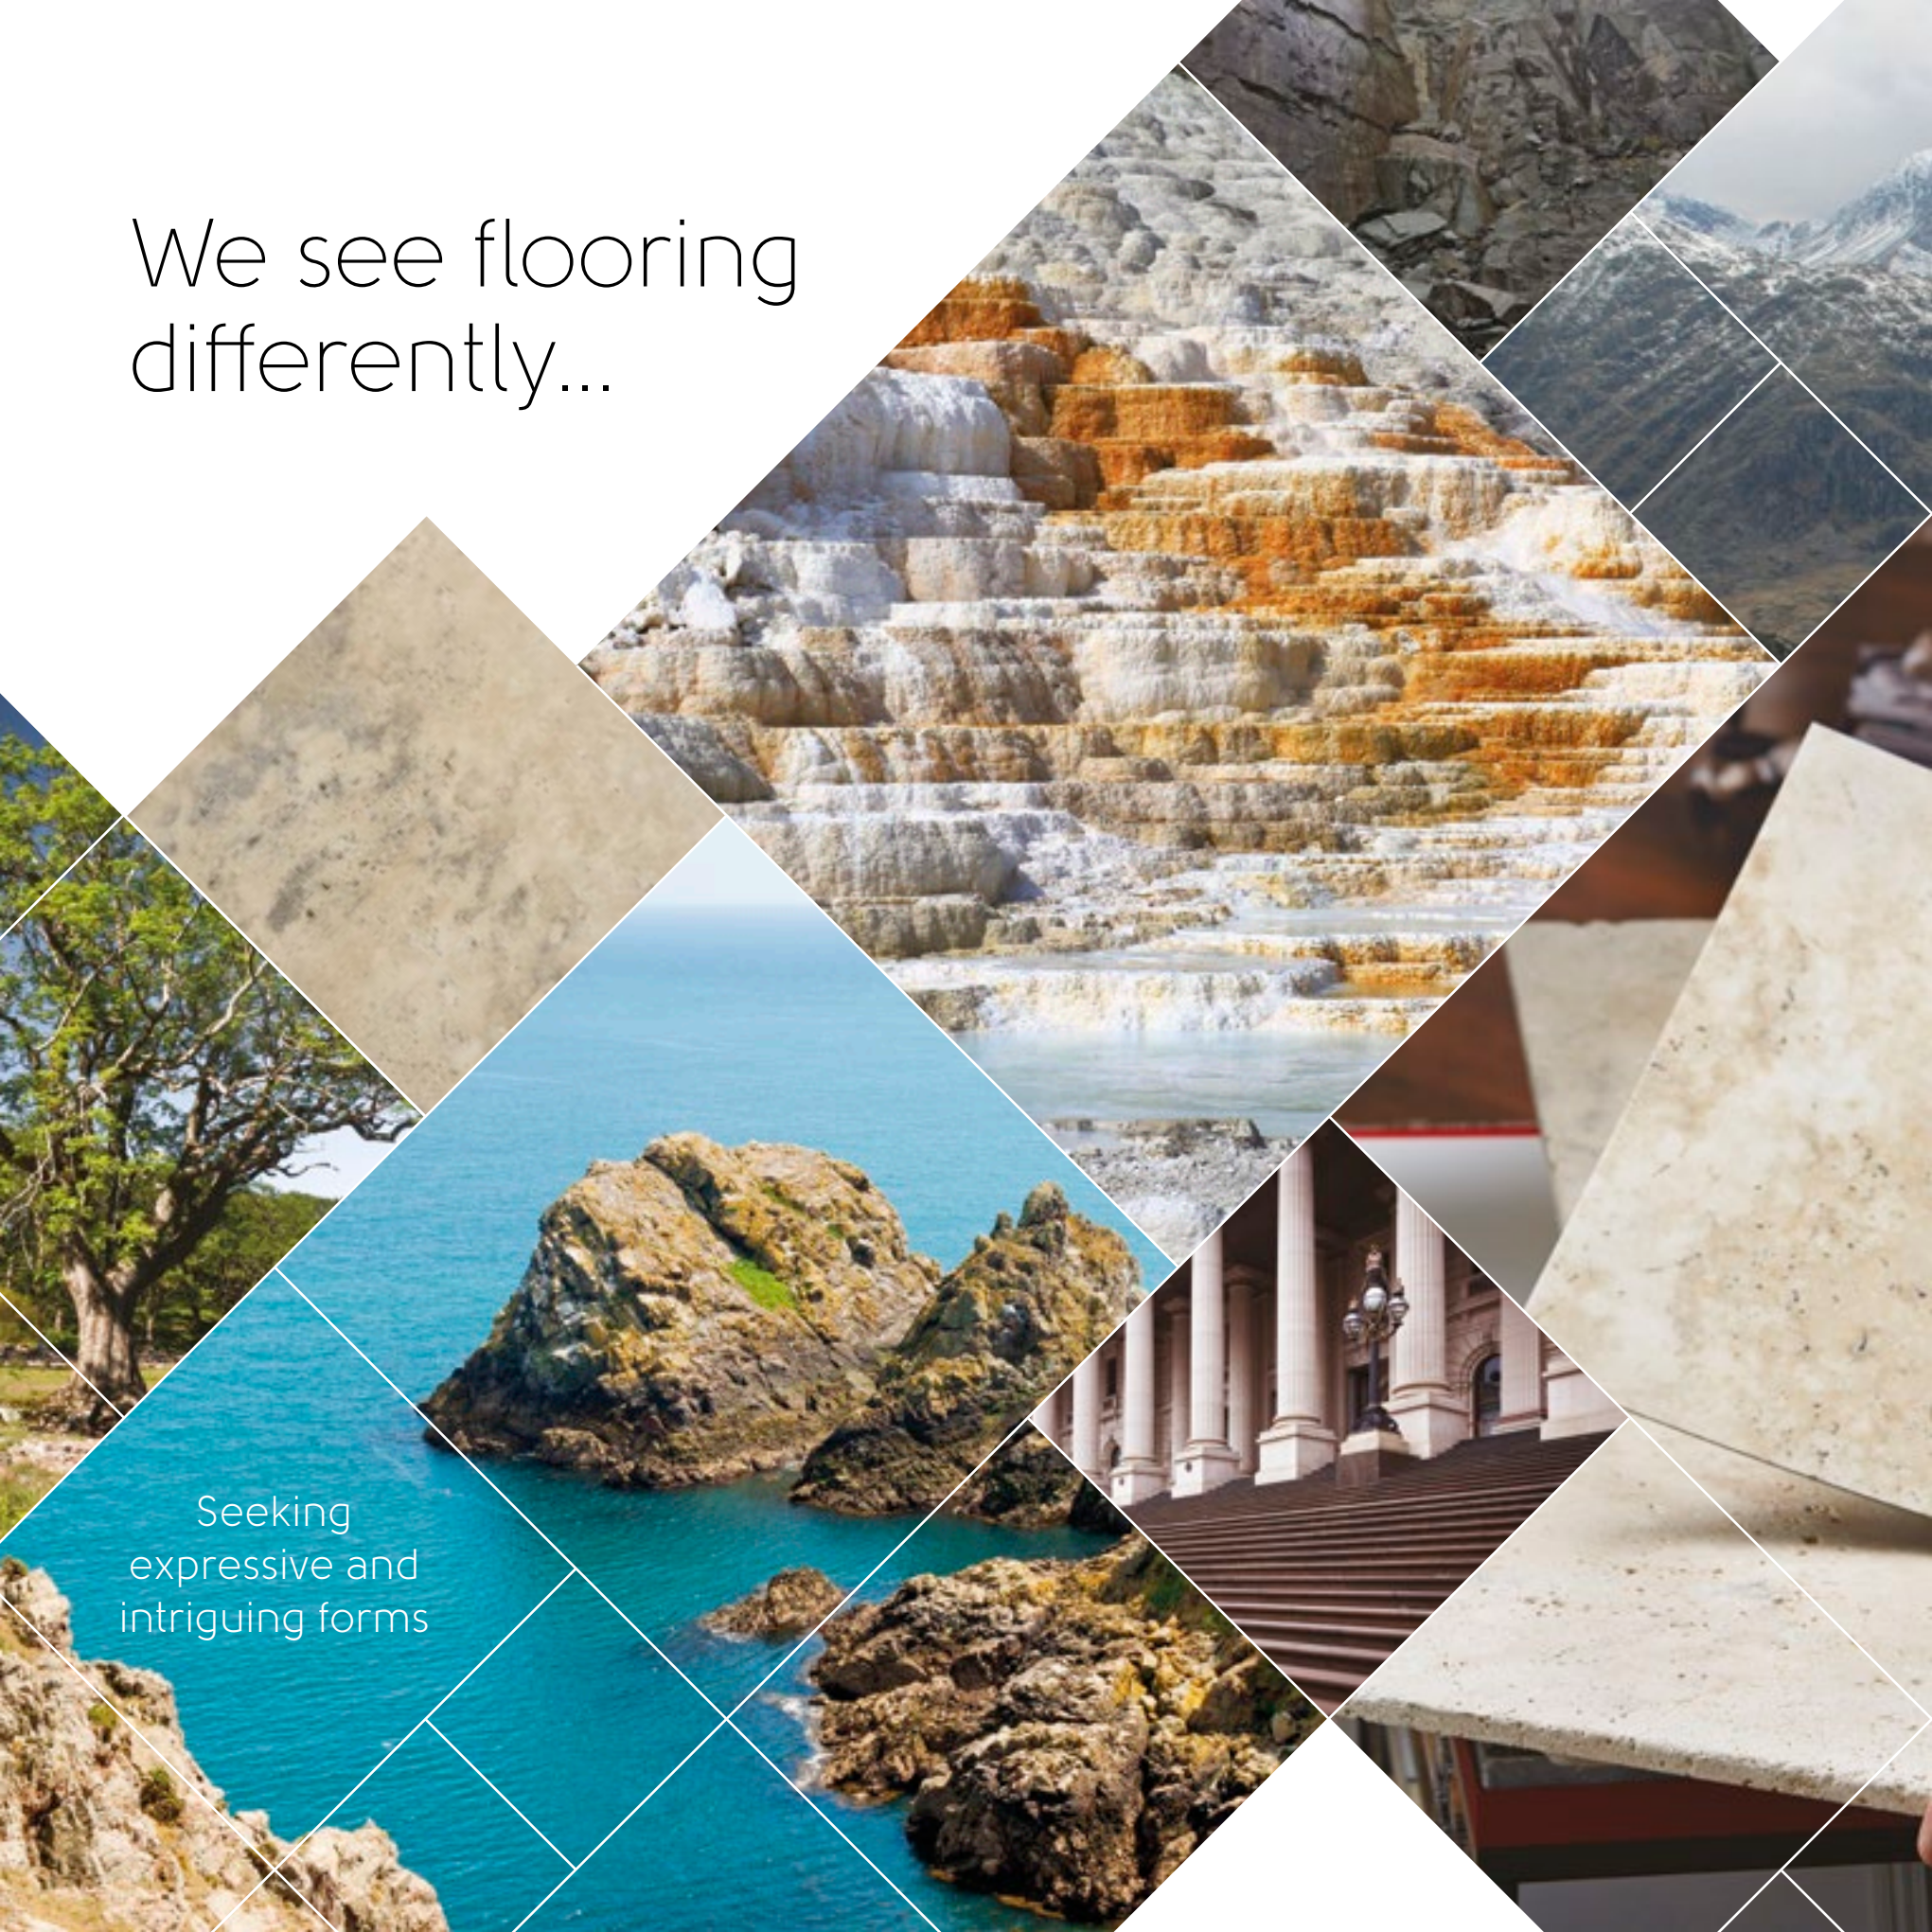

Using this book

We have created this Product Selector with your specification needs in mind. As the only company specializing in LVT and offering all major LVT categories, we truly have the perfect floor for any situation. Our vast collection of colors, designs and formats allows us to offer you the widest range of choice, while tools such as this Product Selector help you find the product that is just right for you.

In this book you will find our full gluedown, loose lay and rigid core offering: carefully selected with features such as beveled edges, different emboss types and effects such as liming and handscraping, all designed to enhance the natural beauty of the original woods and stones that inspired each product.

Use this guide to quickly find what you need:

All ranges - at a glance, with both wood and stone - pages 22 and 26

Image gallery, including case study images - pages 30, 258 and 322

Gluedown products, with its own 'at a glance' for wood and stone - page 42


Technical overview, so you can easily compare our gluedown ranges - page 48

Global environmental statement, including our global initiatives - page 10

Loose lay products, with its own 'at a glance' and technical overview - page 257

Rigid core products, with its own 'at a glance' and technical overview - page 321


Index, in both product name and product code order - page 448

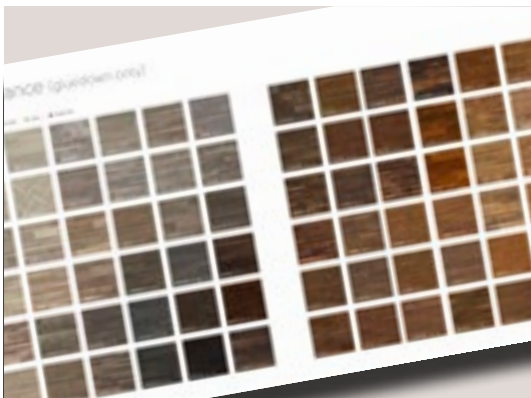

Contact

For the information, materials and help you need to design and specify Karndean Designflooring, or to find your local Commercial Business Manager, please contact us.

Phone: **888-266-4343** | Email: **info@karndean.com** | Website: **www.karndean.com**

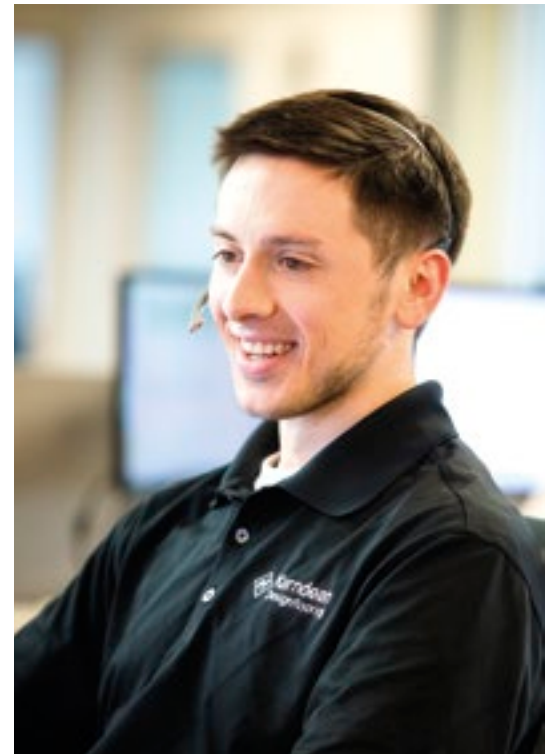

Sectors we work in

Retail

Whether a small town boutique or suburban superstore, eye-catching floor designs that guide consumers throughout the space are essential. Our unique design capabilities allow for the creation of zoning/wayfinding.



Healthcare

Cleanliness and durability are important in healthcare environments. With Karndean, you can have a durable, easy to maintain floor that creates a home-like atmosphere, contributing to a calm healing environment.



Corporate

Offices are places for thought, discussion and creativity. Choosing Karndean Designflooring for the boardroom, reception area or office is the key to creating a space that's comfortable, inspiring and practical.



Education

Durable and low maintenance, Karndean Designflooring helps you to create safe and inspiring educational environments for students of all ages.



Hospitality

In a sector where style, resilience and ease of keeping floors clean is vital, Karndean Designflooring is a proven choice for the demands of hotels, bars, restaurants, tourist attractions and leisure facilities.



Multifamily

Quality flooring adds value to new developments, and with Karndean, property managers benefit from a versatile, hardwearing, durable floor attracting more tenants and improving your bottom line.



Global environmental statement

Karndean Designflooring and the environment

Sustainable raw materials

The key raw material in our product, PVC, is derived from a truly sustainable resource: salt. In addition to some renewable bio-based raw material, the minerals used to reinforce our products are naturally plentiful in the earth's crust and can be considered sustainable.

Raw materials are purchased in bulk and sourced as locally to our factories as possible. They are also sourced from ISO 14001/ISO 9001 certified raw material suppliers where possible.



Safe products

Our products are based on vinyl (PVC); the same tried and tested material used in vital medical equipment, from blood bags to dialysis tubing, heart and lung bypass tubing, surgical gloves to pill packets. The same material we put our trust in for pipes, wire and cable protection and window frames. Indeed, it is the most widely used polymer in building and construction.

In the USA, our products comply with California's 'Proposition 65' and are free from chemicals known to cause cancer, birth defects or other reproductive harm. They require no warning labels when offered for sale throughout the USA.

Air quality

All Karndean products have been tested for contribution to indoor air quality and independent testing proves that our products are very low emitting in terms of VOCs (volatile organic compounds), meeting the strictest standards for air quality.



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)



Proven low environmental impact

Many of our products have an Environmental Product Declaration (EPD). An EPD is an independently verified and registered objective report based on a life cycle assessment (LCA). Its purpose is to communicate transparent and comparable information about the life cycle environmental impact of products, including: global warming potential, ozone depletion potential, and fossil fuel depletion potential.

Leadership in Energy & Environmental Design (LEED) is the most widely used building environmental certification program used in the USA. Our products help achieve points by virtue of specific EPDs, contribution to indoor air quality, recycled/reusable content and sustainable materials.



LEED v4 Credit Criteria

Credit	Pathway
MR: Environment Product Declarations	Option 1: Environmental Product Declaration (EPD)
EQ: Low-Emitting Materials	Category 3: Flooring via FloorScore® certification

Karndean's recent achievements

- Several of our products have been successfully certified to NSF/ANSI 332. This is the foremost US standard by which to evaluate and certify the sustainability of resilient floor coverings across the entire product life cycle, including both environmental and social aspects of the production and use of LVT.
- All products supplied into the USA are phthalate free.
- Our products are listed on the 'mindful MATERIALS' database, which allows architects and designers access to transparent environmental information about our products.



Environmental organizations/accreditations

We are members of:


- United States Green Building Council (USGBC)
- Green Building Council of Australia (GBCA)
- New Zealand Green Building Council (NZGBC)
- Flooring Manufacturers Sustainability Alliance



Digital tool suite

To ensure you have everything you need from Karndean for your projects, visit our website:

Technical datasheets • Style finder • BIM & CAD files • Blogs

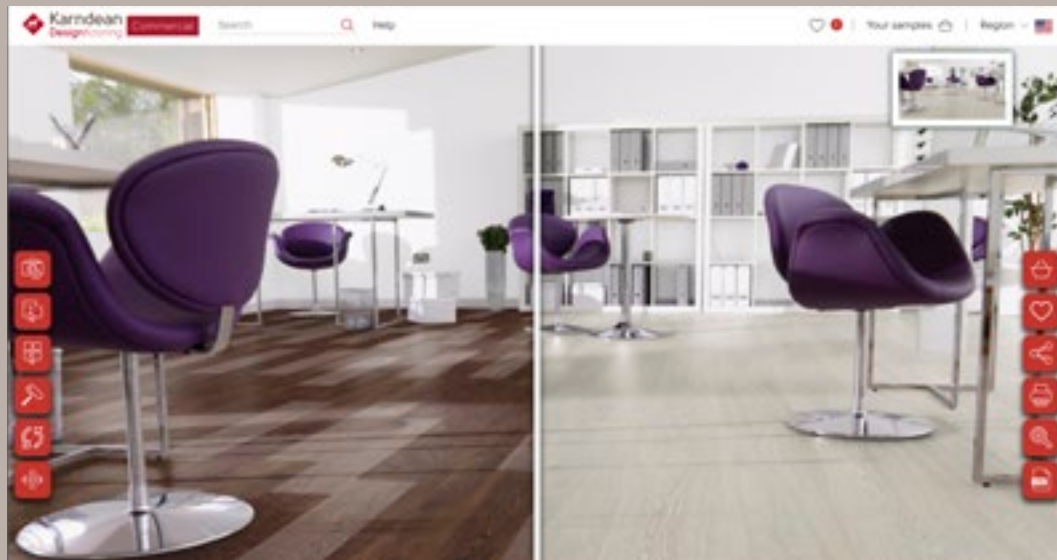

Floorstyle floor designer

The interactive room viewer not only lets you see our wide range of luxury vinyl flooring in typical commercial settings, but you can also upload a photo of a client's space and instantly show them what a new floor might look like in their setting. With improved usability, sector specific settings, access to CAD files, side-by-side comparison, and the option to request samples, you can discover our stylish and practical flooring in a platform that is easy to use and even easier to share.

www.karndean.com/commercialfloorstyle


Product Selector online

Available at www.karndean.com/productselector, the Product Selector page turner is an online version of this book which is regularly updated as new Karndean products are launched.

For phone, tablet and desktop, there are two ways to use the online Product Selector:

- **Browse online** – bookmark the link above to readily access the online page turner from any device with a web connection.
- **Download** – from the online page turner, you have the option to download a PDF version of the book to your local device, meaning you can always have it available as a reference even without a connection to the internet.

www.karndean.com/productselector

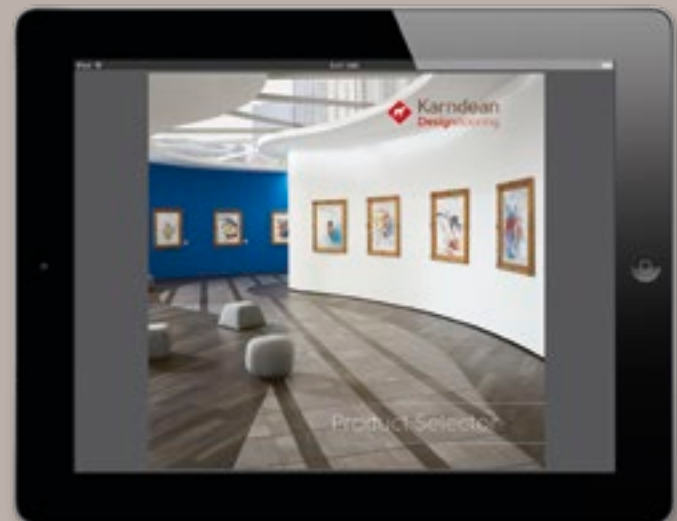



Case studies

Our continually expanding library of inspiring case studies gives you a glimpse into how our products are used in commercial applications, large and small.



Visit the case studies section of our commercial website to view real world Karndean Designflooring installations across a variety of sectors.

www.karndean.com/commercialcasestudies

Video hub

From product features to design and installation hints and tips, the video hub captures our full collection of video content all in one place.

www.karndean.com/commercialvideohub

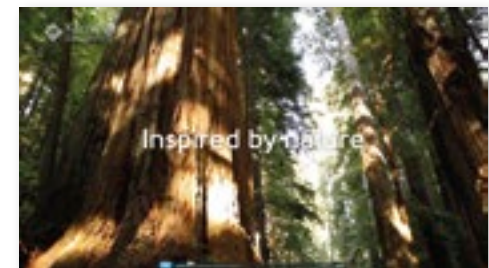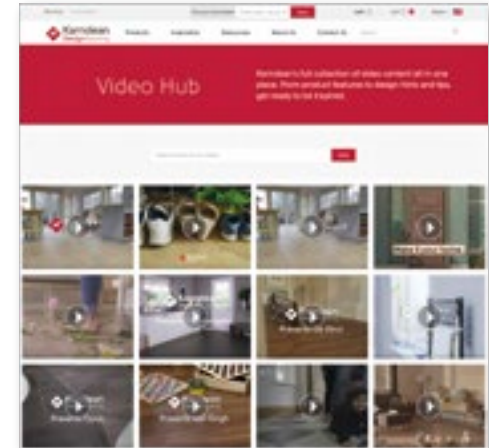

Moodboards

While browsing the Karndean website, click on and save products you like and create different moodboards to reflect different styles and projects.

With this tool, you can build a collection of different ideas by sector or room, which can be easily accessed and shared anytime with clients.

www.karndean.com/commercialmoodboards



ARCAT

ARCAT provides information on building materials for architects, designers, specification writers, engineers and contractors and includes a SpecWizard to automatically configure a complete CSI 3-Part formatted specification in minutes. Visit Karndean Designflooring on ARCAT for further product specification information.

www.arcata.com


ARCAT



Designflooring explained

Designflooring is the use of modular components to customize your project. The beauty of Karndean Designflooring is its versatility - the design possibilities are endless. Define a space and add visual interest by designing with one or more of our 200+ product choices. Integrate design strips, borders, a custom logo, or simply blend two colors together to create a truly unique project.




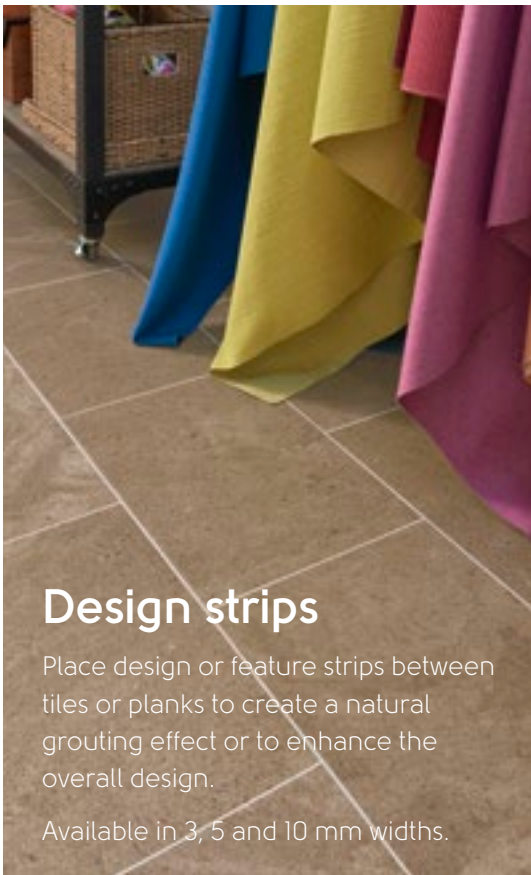

Design strips

Place design or feature strips between tiles or planks to create a natural grouting effect or to enhance the overall design.

Available in 3, 5 and 10 mm widths.

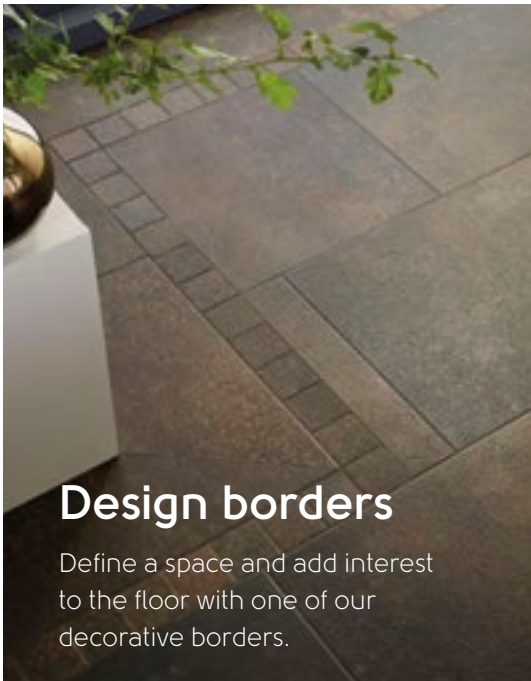

Design borders

Define a space and add interest to the floor with one of our decorative borders.

Design features

Whether your project requires a company logo, a name to inset into the floor or a special design to produce, we can help to bring your ideas to life.



Kaleidoscope

Explore a world of patterns and shapes with Kaleidoscope, our collection of wood, stone and solid colors custom cut in geometric formats.

For more about the Kaleidoscope program, go to page 252.



Designflooring in commercial environments



With increasing competition, it's more important than ever to create an engaging customer experience. In today's digital age, the floor has become the maximum impact zone due to our constant engagement with hand-held technology. Experiment with a combination of colors, sizes and textures to break up a space and add visual interest, while enhancing the overall design.

Zoning

Easily highlight key sections or displays and separate front and back of house areas by mixing products or by incorporating design strips and inlays.




Wayfinding

Flexibility in flooring allows you to add walkways and create paths that facilitate customer, resident or employee traffic flow.



Blending

Incorporate compatible products into one design to achieve a balance of color tones or a custom look.

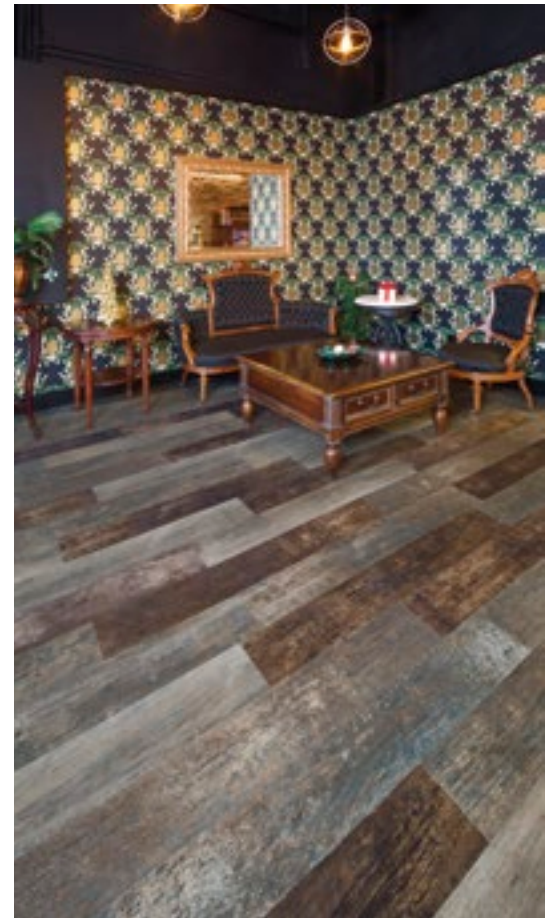



Our product formats

We offer three types of products: gluedown, loose lay and rigid core.

We are proud to say all our products offer essential benefits that make Karndean Designflooring the ideal choice for all spaces, from large commercial specifications to small residential rooms. On the following pages, you will see the individual benefits of our three distinct product formats: gluedown, loose lay and rigid core. The following benefits apply to all Karndean Designfloors:



Waterproof

Unlike laminate and engineered hardwoods, our floors are impervious to water and will not swell, crack or warp when wet, making them perfect for restaurants, hotels and other areas prone to spills and heavy foot traffic.



Hygienic

Unlike carpets, our floors don't hold dust, dirt, pollen or other allergens. Our cleaning products also kill 99.9% of environmental germs.



Low maintenance

A regular sweep and mop with Karndean Clean is all you need to keep your Karndean floor looking great. With Karndean, you also don't have to worry about any sanding, refinishing, staining or varnishing.



100% recyclable

We do everything we can to meet and exceed legislation and environmental guidelines in every region we sell our products, meaning you can count on the fact you're choosing a safe and environmentally-friendly flooring.



Comfortable underfoot

Our products are much warmer and quieter underfoot, giving you the look of real wood and stone but without the drawbacks of cold tiles or clicking shoes.



Durable

Unlike other flooring alternatives, Karndean Designflooring gives you the look and feel of natural products but with the durability and resilience of luxury vinyl.



K-Guard+®

Each of our floors is finished with K-Guard+®, adding extra protection against scuffs and scratches, and making it even easier to clean and look after.



Acoustic qualities

All Karndean Designflooring products aid in the reduction of noise transfer and are tested for acoustic impact sound reduction. Please see technical data sheets for supporting documentation.



Compatible with underfloor heating

Karndean flooring is already warm underfoot, but for added warmth, Karndean is perfectly suitable for underfloor heating systems up to 81°F.



Product warranties

All Karndean floors are covered by warranty (10-20 years), giving you and your clients peace of mind.




Resists indentation

Our products will retain their shape under the weight of heavy objects and fixtures.


Gluedown

Our gluedown ranges offer our widest choice of colors and sizes. Features such as textured emboss or our premium handscraped finish, wide bevels or flat edges make each range unique to Karndean Designflooring and highlight the faithful replication of the original wood and stone that inspired each of our products.


Wide selection of sizes: from the **18" x 3"** planks of Art Select parquet to the extra large **48" x 9"** planks in the Opus range; and tiles ranging from **12" x 12"** squares in Knight Tile to Opus's large **18" x 36"**.




Available in a wide range of designs, colors, textures and sizes



No expansion gap required



Can be personalized with design strips or corresponding borders

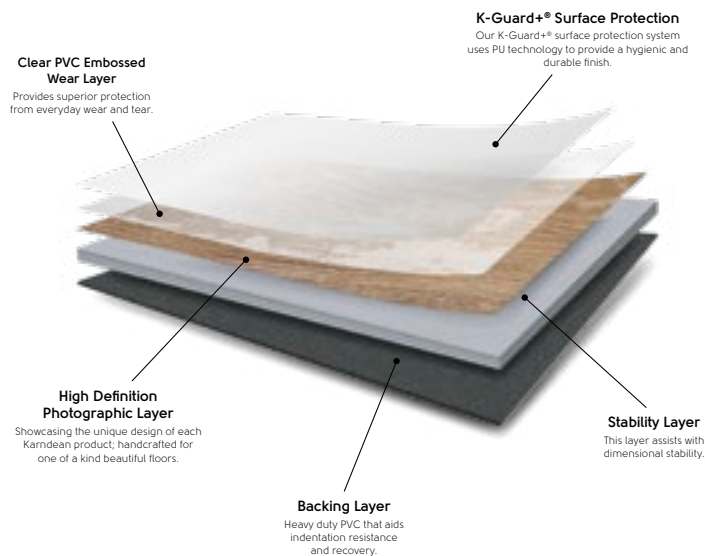


Loose lay

Karndean LooseLay features our K-Wave friction grip backing which helps hold the product to the subfloor without adhesive, making it quick and easy to install. Ideal for underfloor access panels and temporary roomsets, each plank can be lifted individually where required.

Karndean LooseLay is available in two plank sizes and one tile:

Karndean LooseLay | 41" x 10" and 19.7" x 24"


Karndean LooseLay Longboard | 59" x 10"




Easy access to underfloor panels



Reduces noise transfer to room below by 16dB



Quick and easy to install

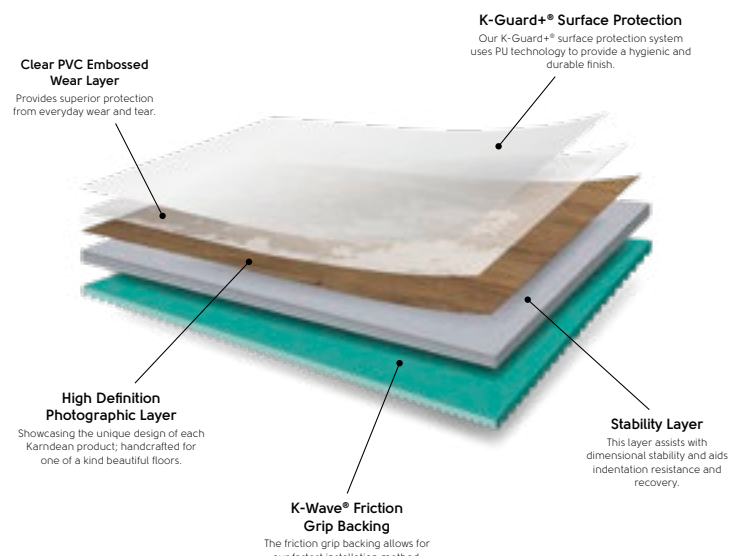

Rigid core


Equipped with our proprietary K-Core® technology, rigid core is ideal for installations where acoustics, uneven subfloors or preservation of existing hard floors need to be considered. Click-locking mechanisms allow for quick installation and the pre-attached backing eliminates the need for a separate underlayment.

Korlok Select | 56" x 9", 18" x 24" and 6" x 24" | 5G® and 2G™ locking mechanisms

Korlok Reserve | 48" x 7" | 2G™ locking mechanism

Van Gogh | 48" x 7" | Click-locking mechanism

Knight Tile | 48" x 7" and 12" x 24" | 2G™ locking mechanism




Installs over existing hard floors




Reduces noise transfer to room below by up to 22dB



Suitable for <95% RH

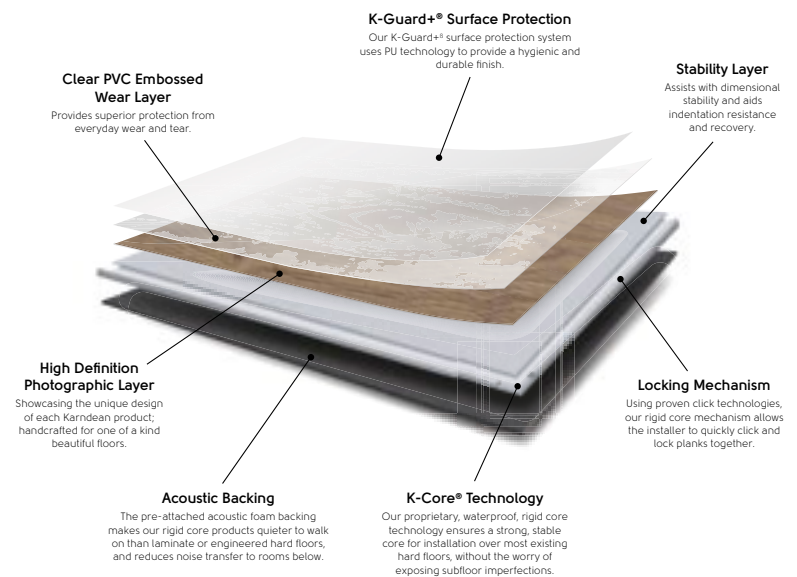


Wood at a glance (all product formats & ranges)

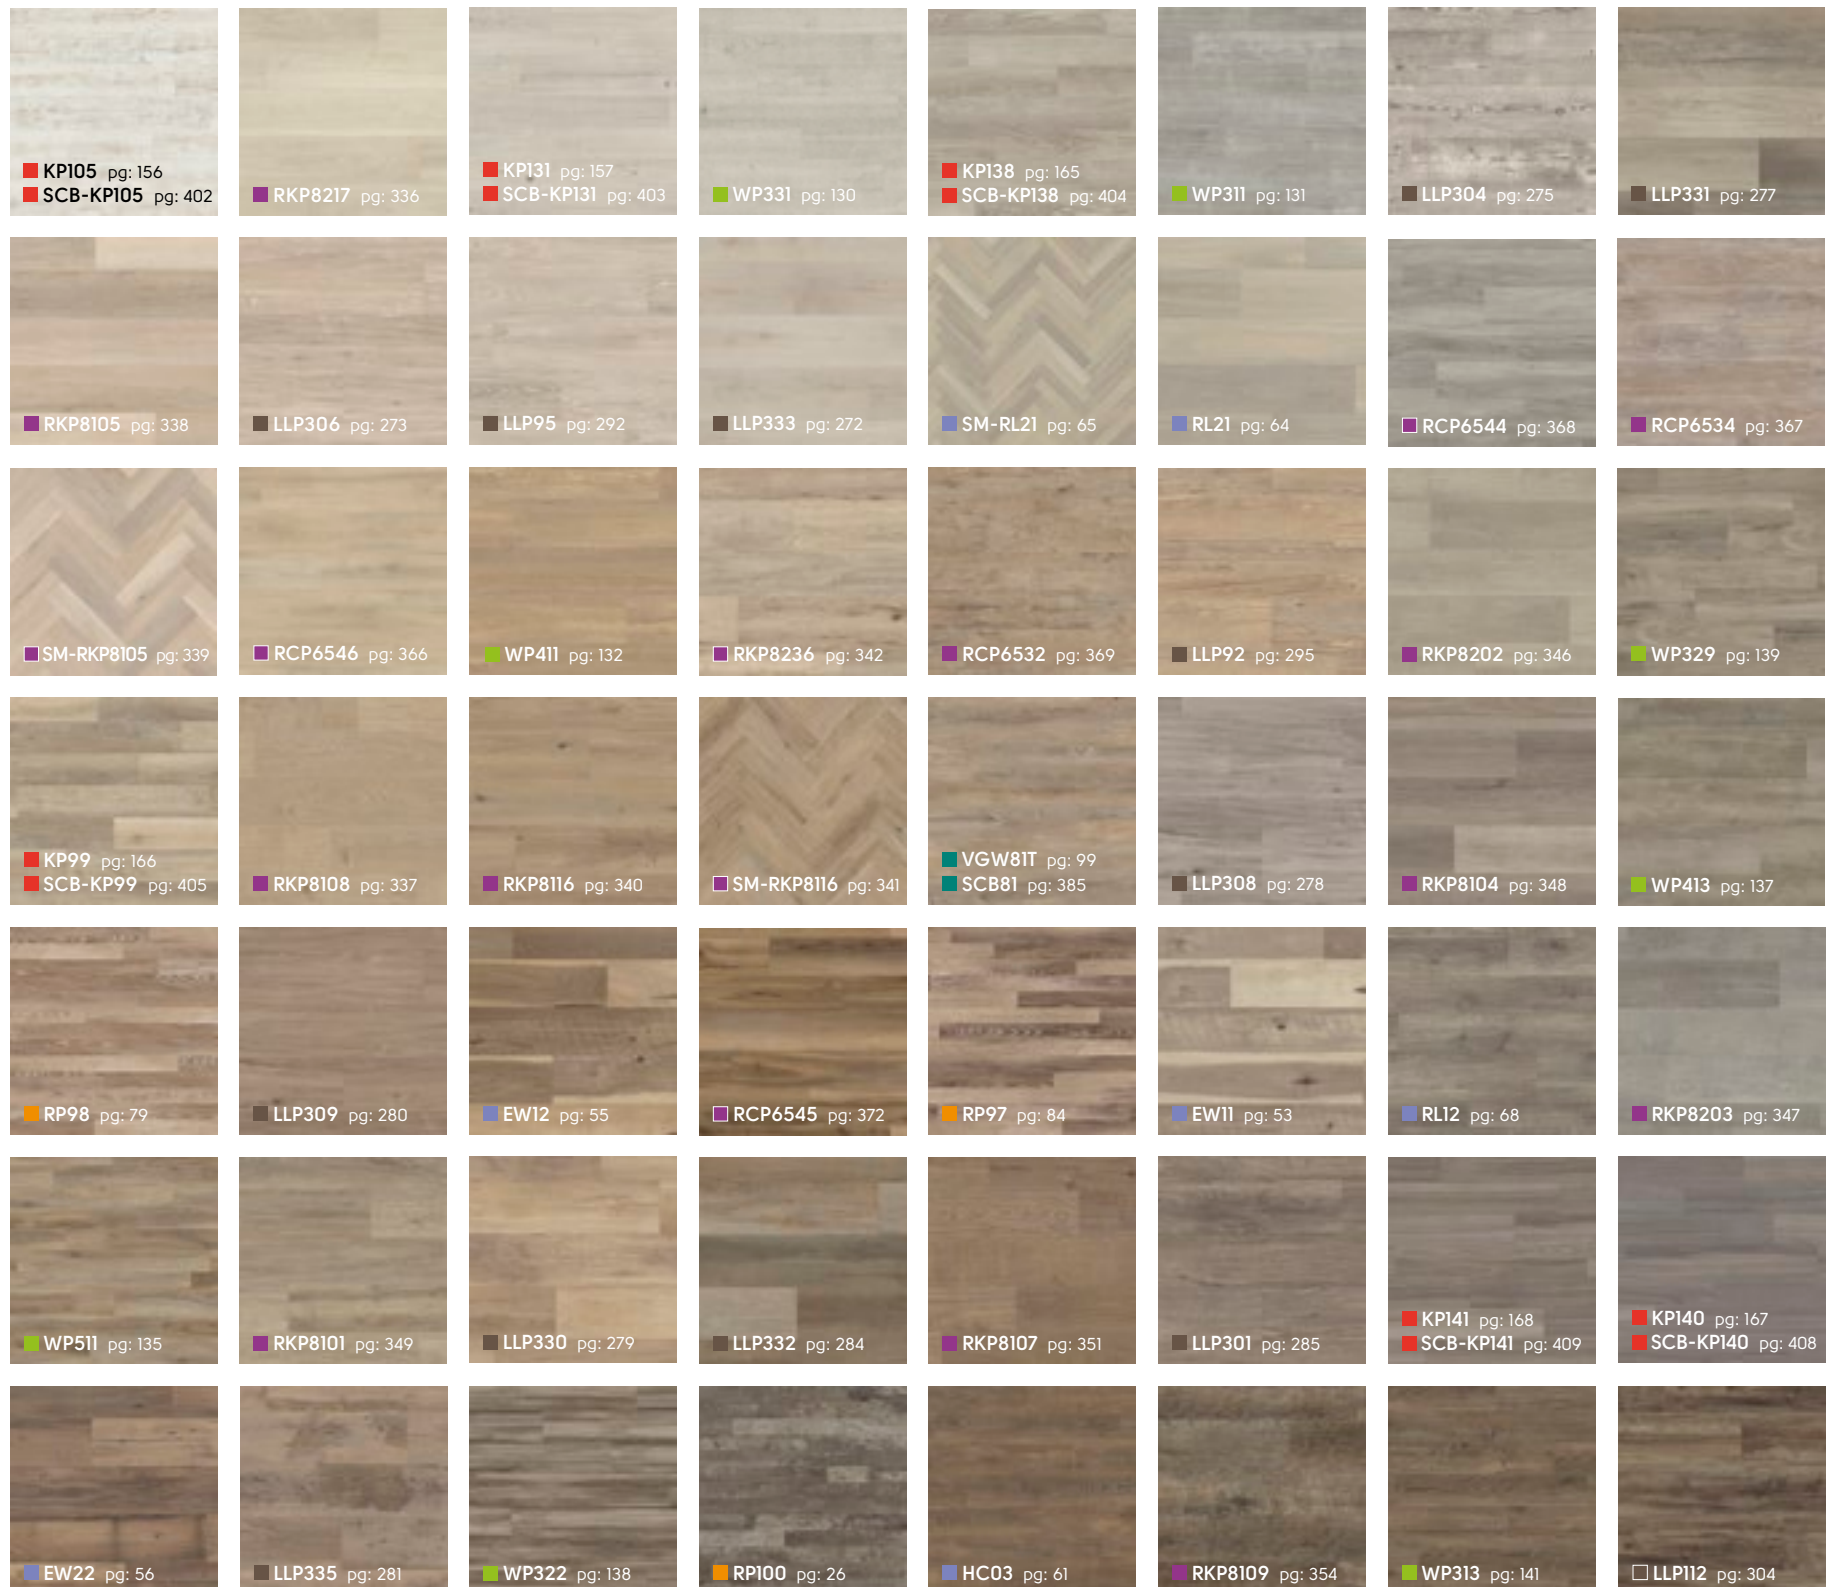


Gluedown: ■ Art Select | ■ Da Vinci | ■ Van Gogh | ■ Opus | ■ Knight Tile

Loose lay: ■ Karndean LooseLay | ■ Karndean LooseLay Longboard

Rigid core: ■ Korlok | ■ Van Gogh | ■ Knight Tile



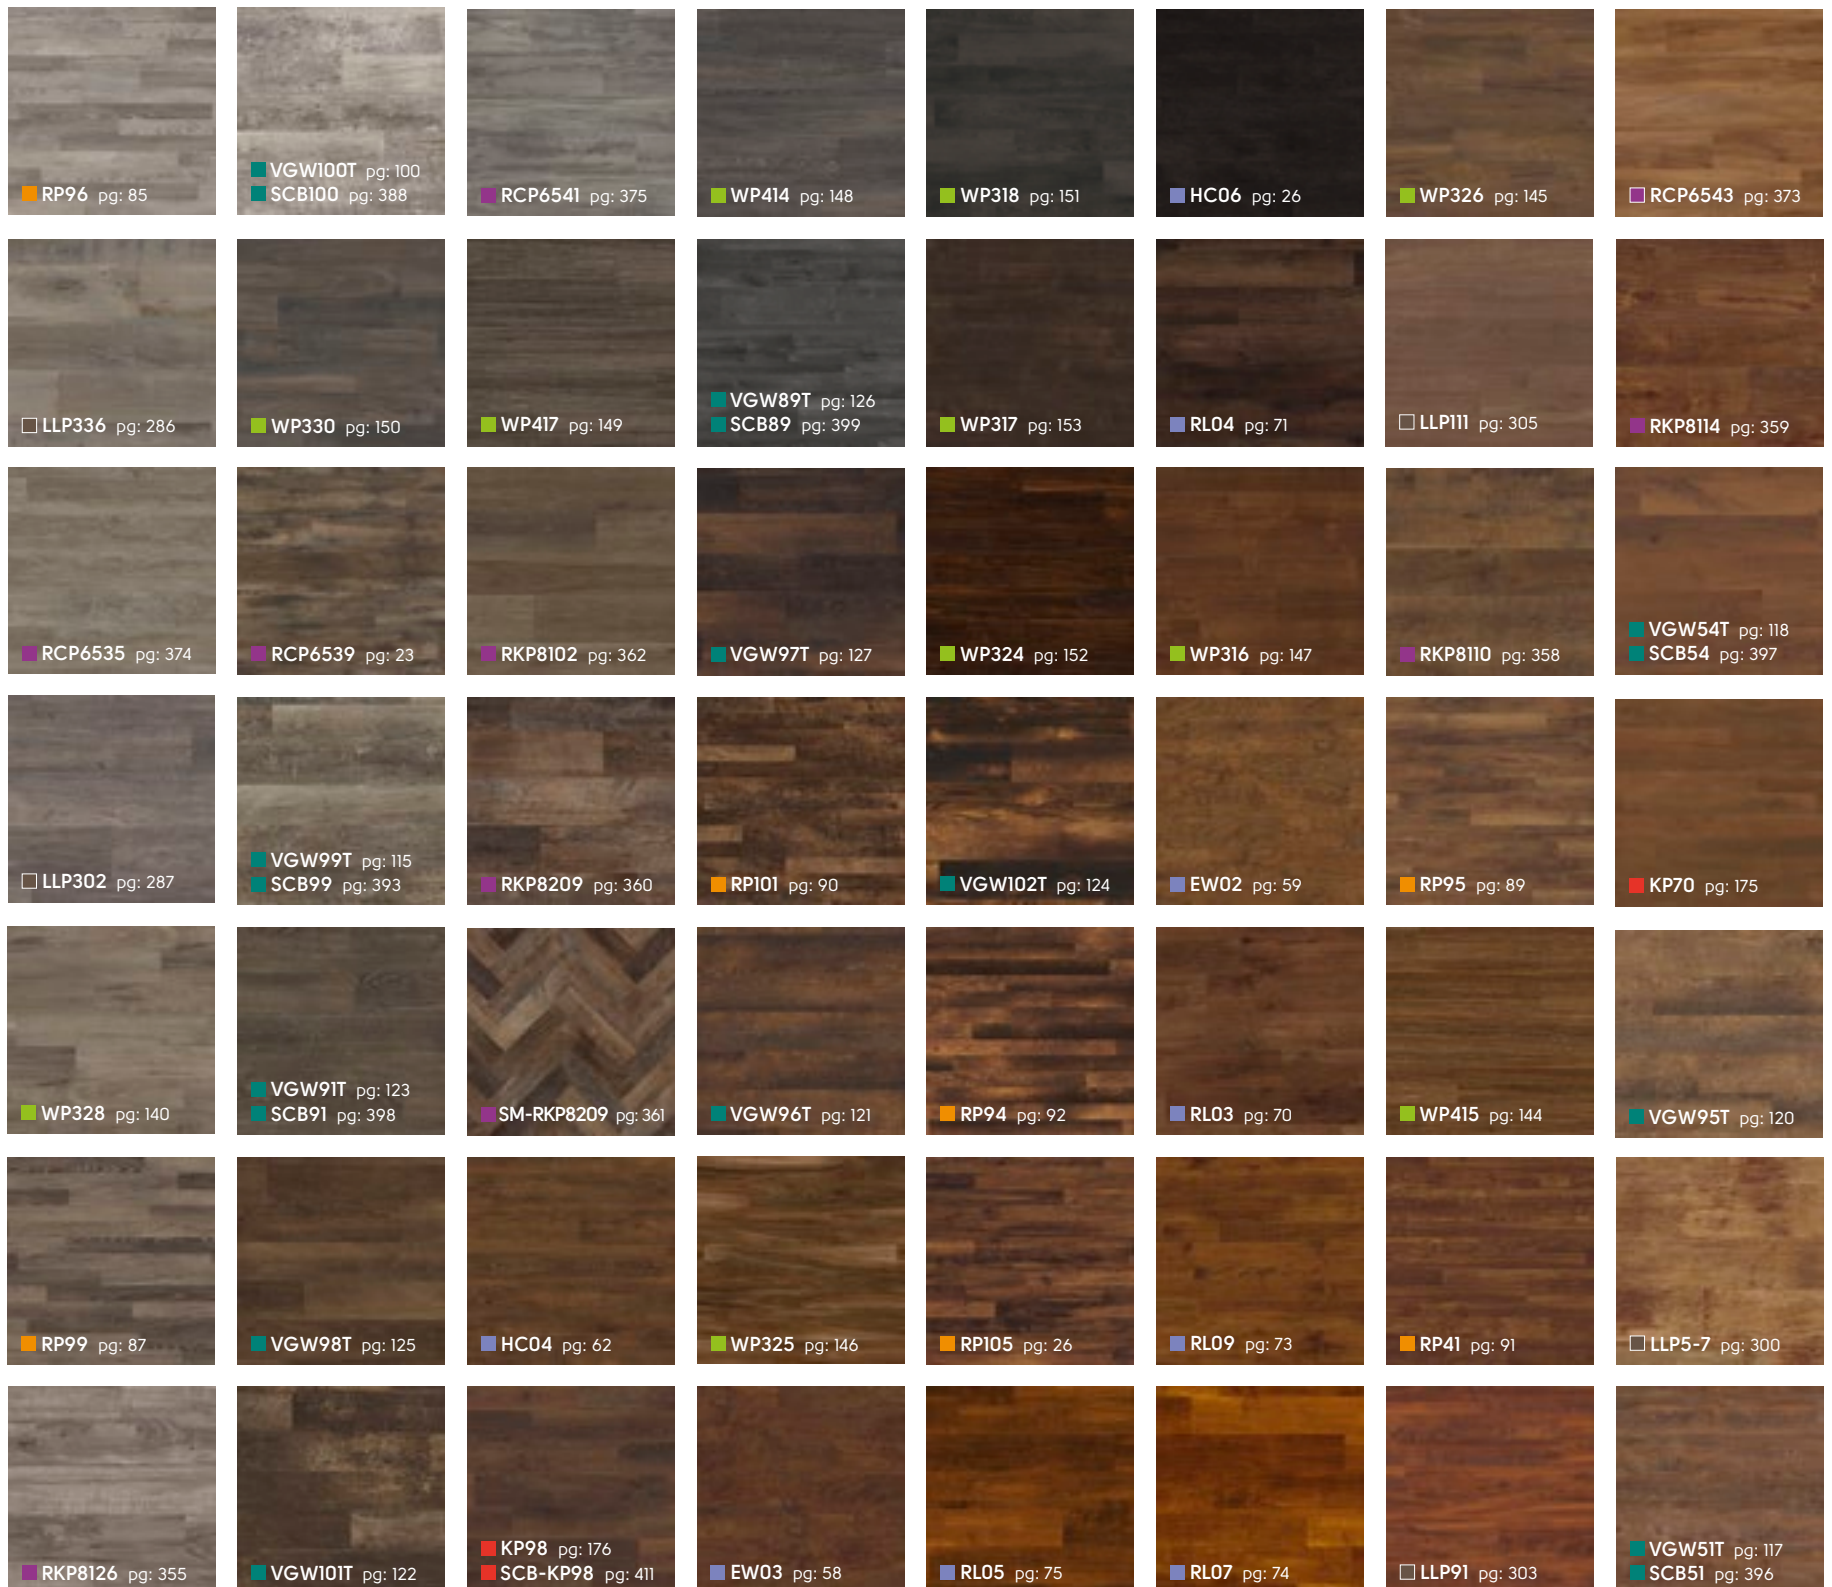


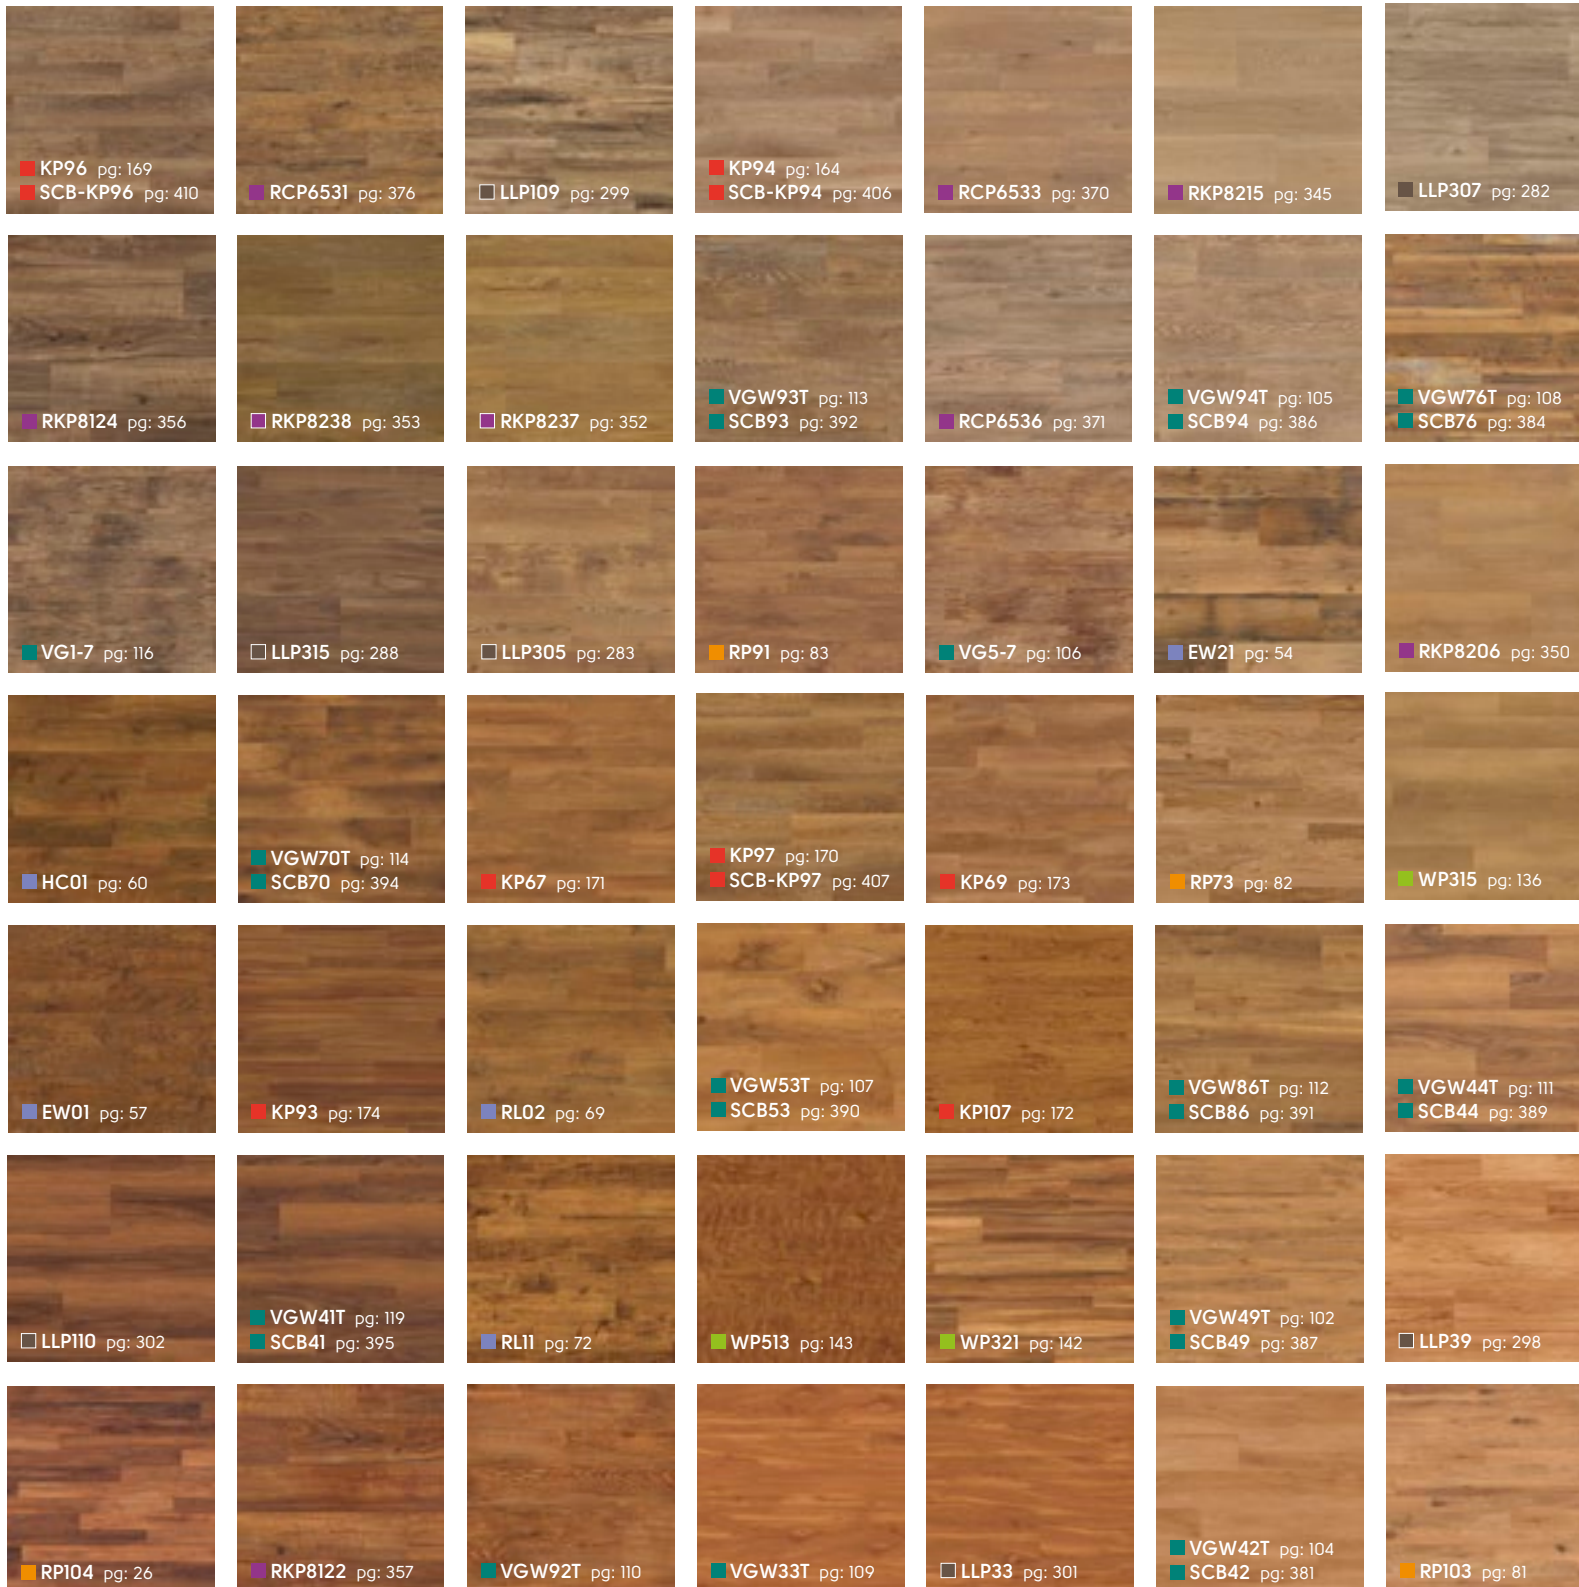

Gluedown: ■ Art Select | ■ Da Vinci | ■ Van Gogh | ■ Opus | ■ Knight Tile

Loose lay: ■ Karndean LooseLay | ■ Karndean LooseLay Longboard

Rigid core: ■ Korlok | ■ Van Gogh | ■ Knight Tile

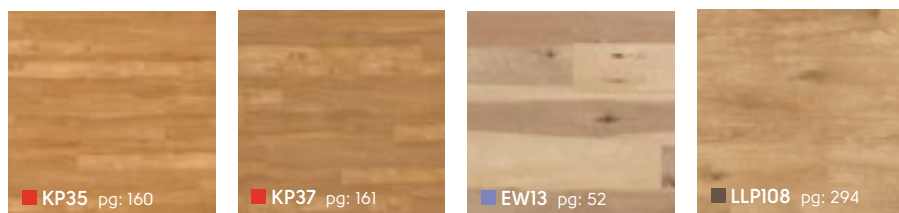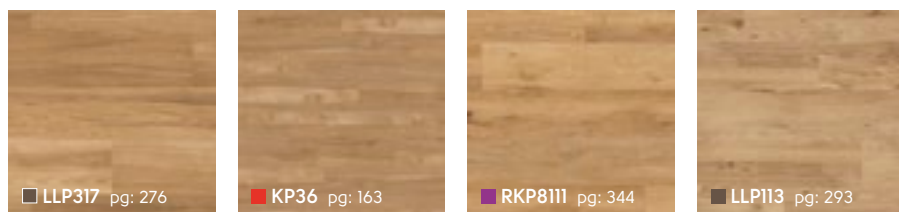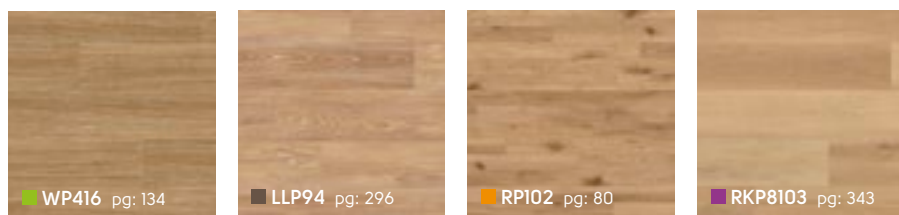



Stone at a glance (all product formats & ranges)



Gluedown: ■ Art Select | ■ Da Vinci | ■ Opus | ■ Knight Tile

Loose lay: ■ Karndean LooseLay

Rigid core: ■ Korlok | ■ Knight Tile

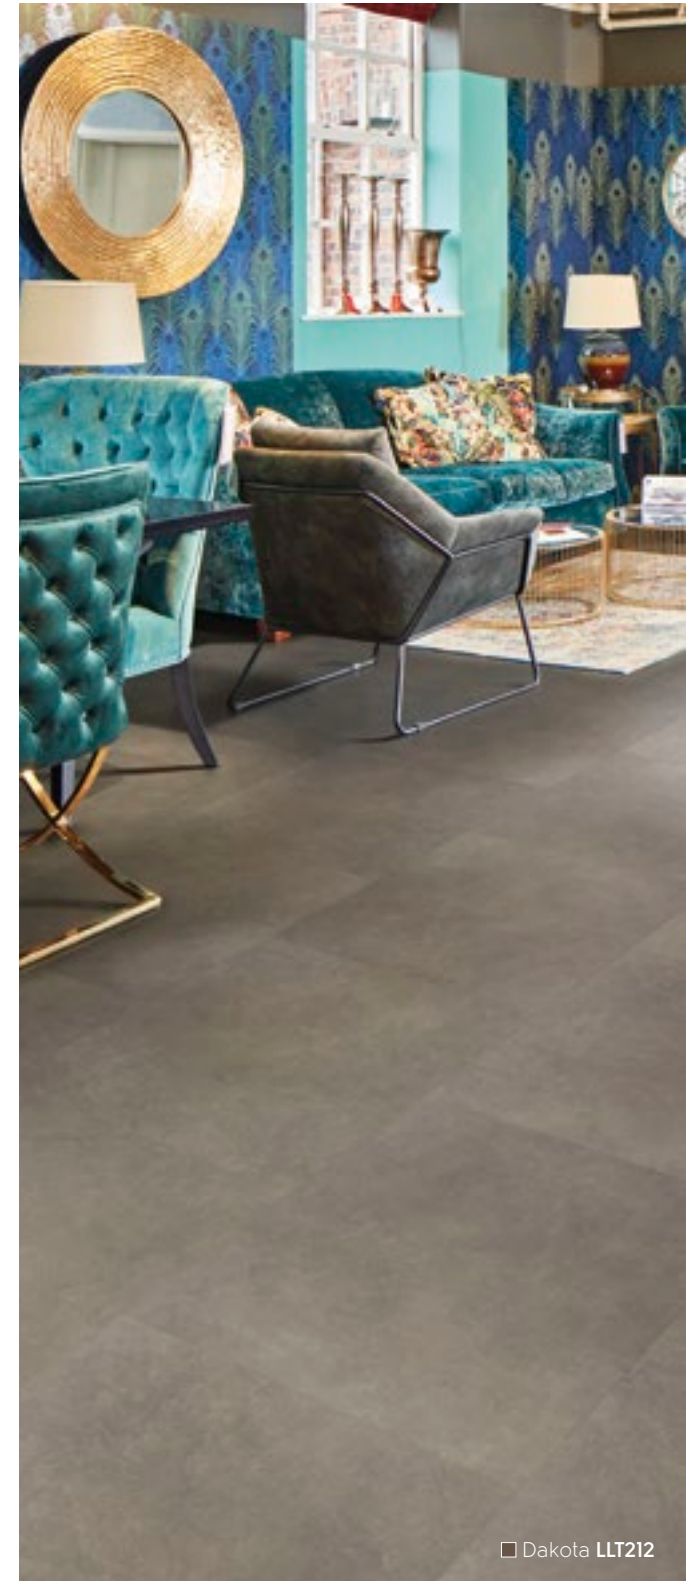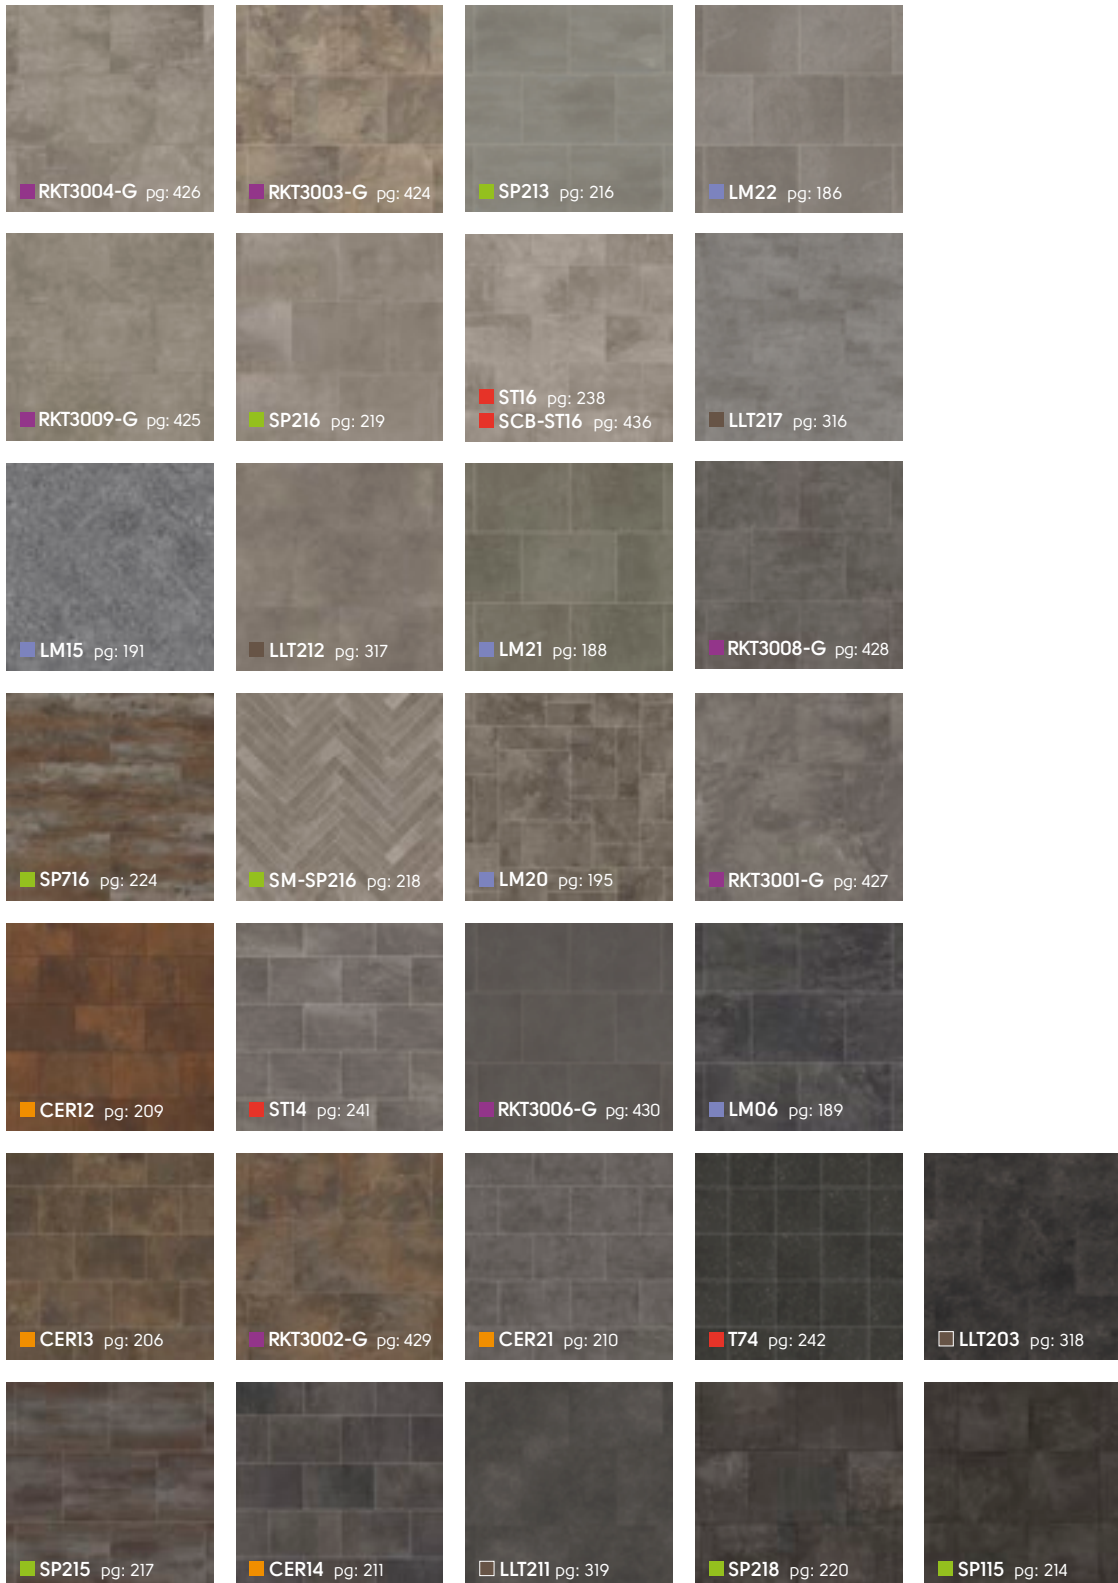



A top-down view of a grey carpeted floor with a white geometric pattern. In the upper left, a mood board shows a modern living room with grey armchairs and light green ottomans. To the right, there are several items: a stack of light green books, a light green folder, a white envelope, a grey speckled stone sample, and a stack of wooden floor samples. The word "Gluedown" is centered in white text.

Gluedown













WELLINGTON ROAD



Coffee
Tea
Hot Choc

Menu

Breakfast

- EGG BENEDICT £4.00
- SMOKED SALMON & CRAB £4.50
- EGG SANDWICH £3.50
- SCRAMBLED EGG ON TOAST £3.50

Lunch

- SOUP OF THE DAY £3.00
- SMASHED POTATO £3.50
- CHICKEN & TOMATO £4.50
- SMY & EGG SALAD £4.50
- CHICKEN & BROCCOLI £4.50
- STEAK & POTATO £5.50
- SMASHED POTATO £3.50
- CHICKEN & SALAD £4.50
- TUNA PASTA £4.50
- PIZZA & CHEESE £4.50



Case Study: Stephen Gould

Location: Wexford, PA

Product: Opus stone


"The designers and technicians really helped to bring my vision of a cool and innovative work place environment to life."

“Durability and maintenance were important since it was being installed in the highest traffic areas of the space. Having a floor that could withstand the daily grind was essential.”

Case Study: Equator

Location: Chicago, IL

Product: Opus wood

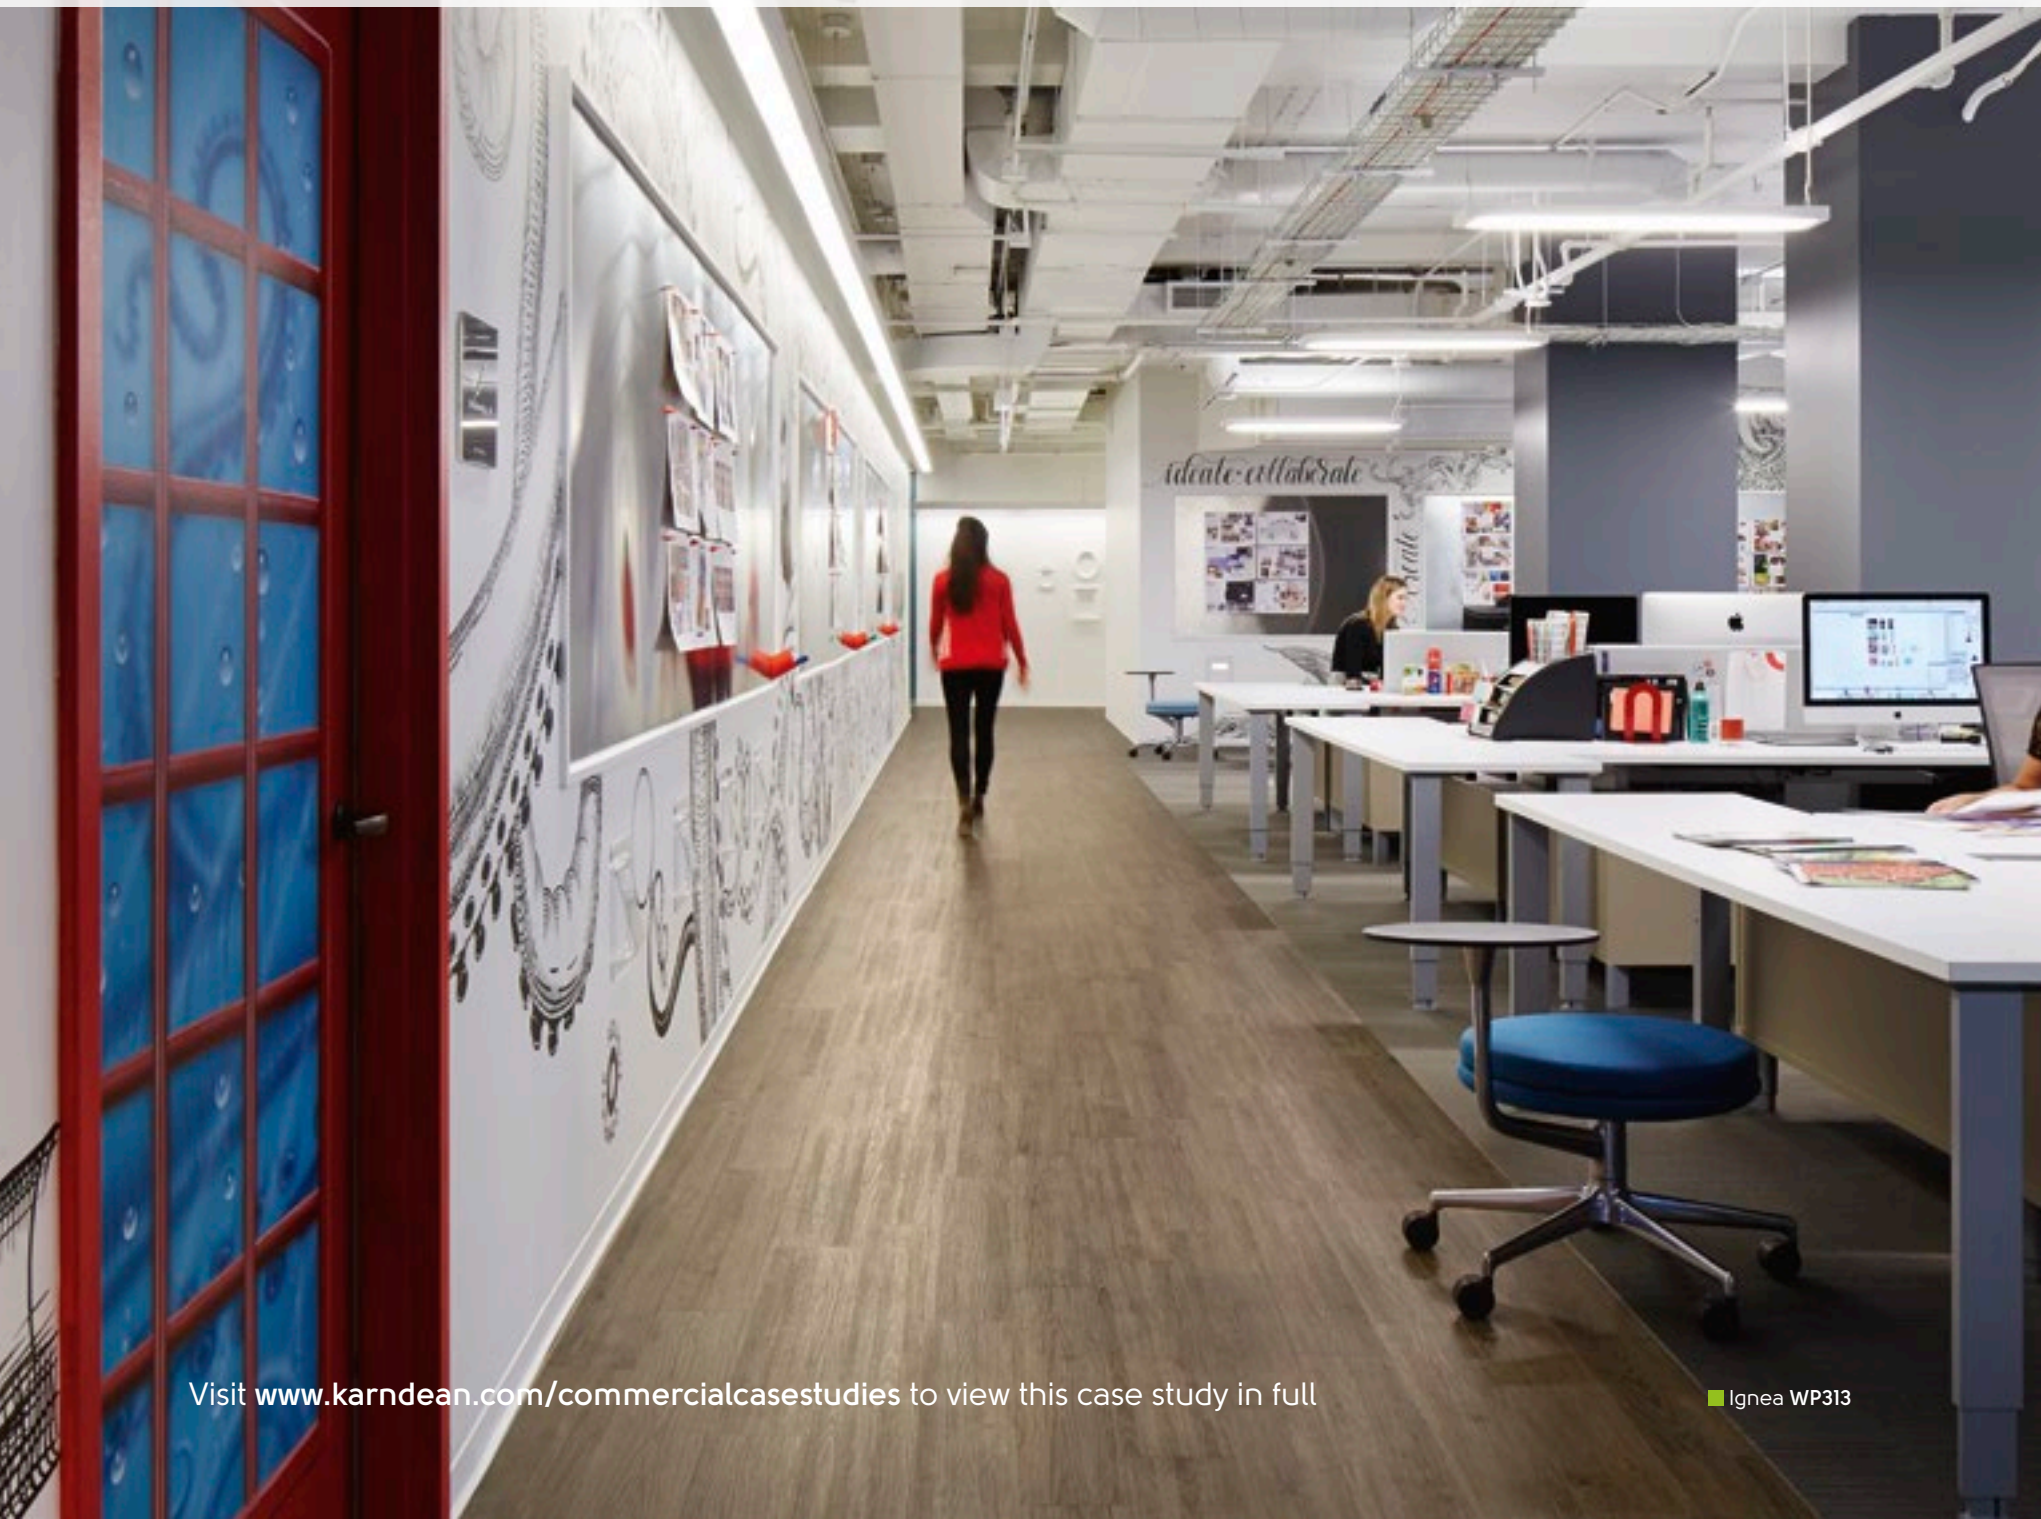


Visit www.karndean.com/commercialcasestudies to view this case study in full

■ Ignea WP313


Lay patterns

Karndean Designflooring products are very versatile and are designed to accommodate the growing desire for zoning individual spaces and matching 'room to room' designs. With Karndean it is possible to specify stone and wood products side by side, lay the flooring at different angles, or use different sizes of the same product to create more interest.

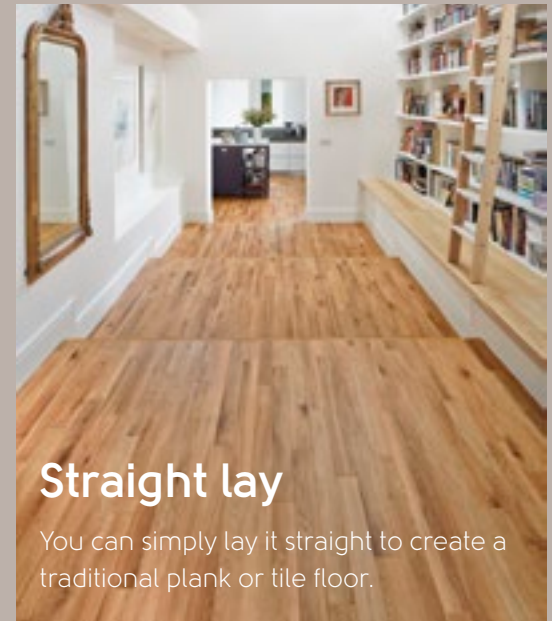

Straight lay

You can simply lay it straight to create a traditional plank or tile floor.

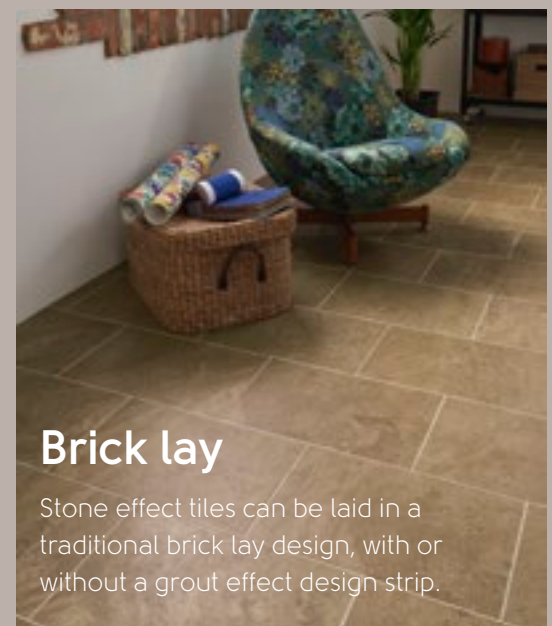


Brick lay

Stone effect tiles can be laid in a traditional brick lay design, with or without a grout effect design strip.


Herringbone

Try laying large planks or tiles in a herringbone style for a dramatic effect or for a more traditional look go for narrow planks or parquet.

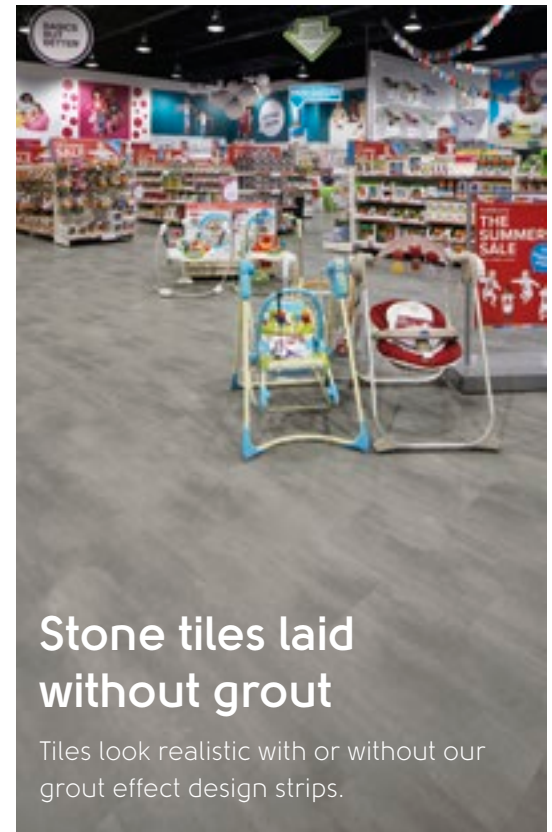

Stone tiles laid without grout

Tiles look realistic with or without our grout effect design strips.

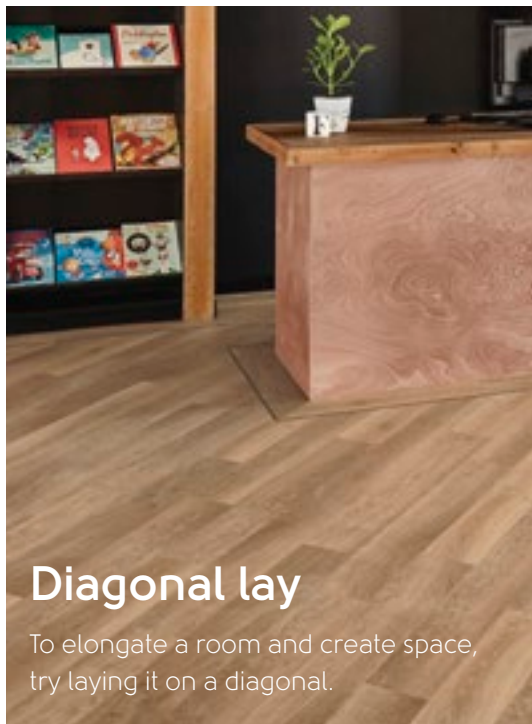

Diagonal lay

To elongate a room and create space, try laying it on a diagonal.



Mixing wood and stone designs

Specifying Karndean in a project allows you to easily mix wood and stone effect designs. Unlike the natural products, there are no issues of movement or height transitions when you place stone and wood effect designs from the same product range next to each other.

Pattern guide

It's not just the floor you lay, but how you lay it that makes a lasting impression. We offer numerous pattern possibilities to make the most of your space. Add design strips and borders for a truly unique look.



Wood layouts



Staggered



Herringbone




Ship Lap




Chevron



Striped

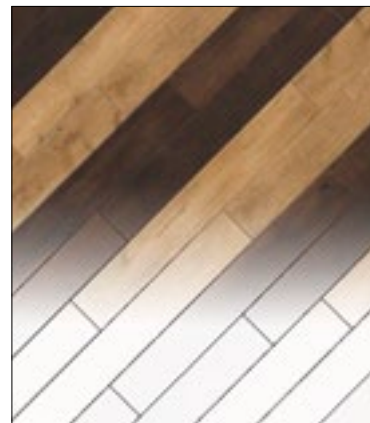

Broken Chevron

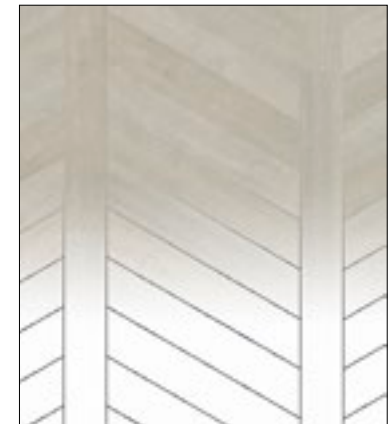

Basket Weave



Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.

Stone layouts



Brick Lay



Diagonal



Diamond




Herringbone



Striped



Pinwheel

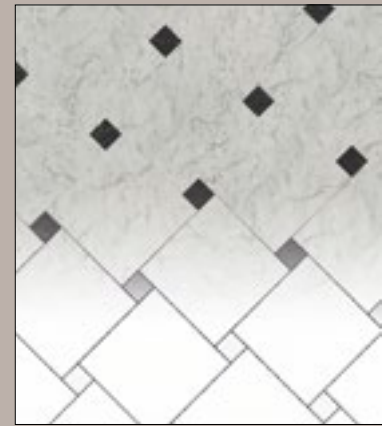


Mixed layouts



Plaid



Alternating

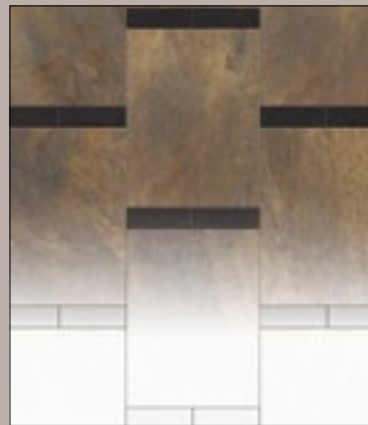



Striped


































Wood at a glance (gluedown only)

Gluedown: ■ Art Select | ■ Da Vinci | ■ Van Gogh | ■ Opus | ■ Knight Tile

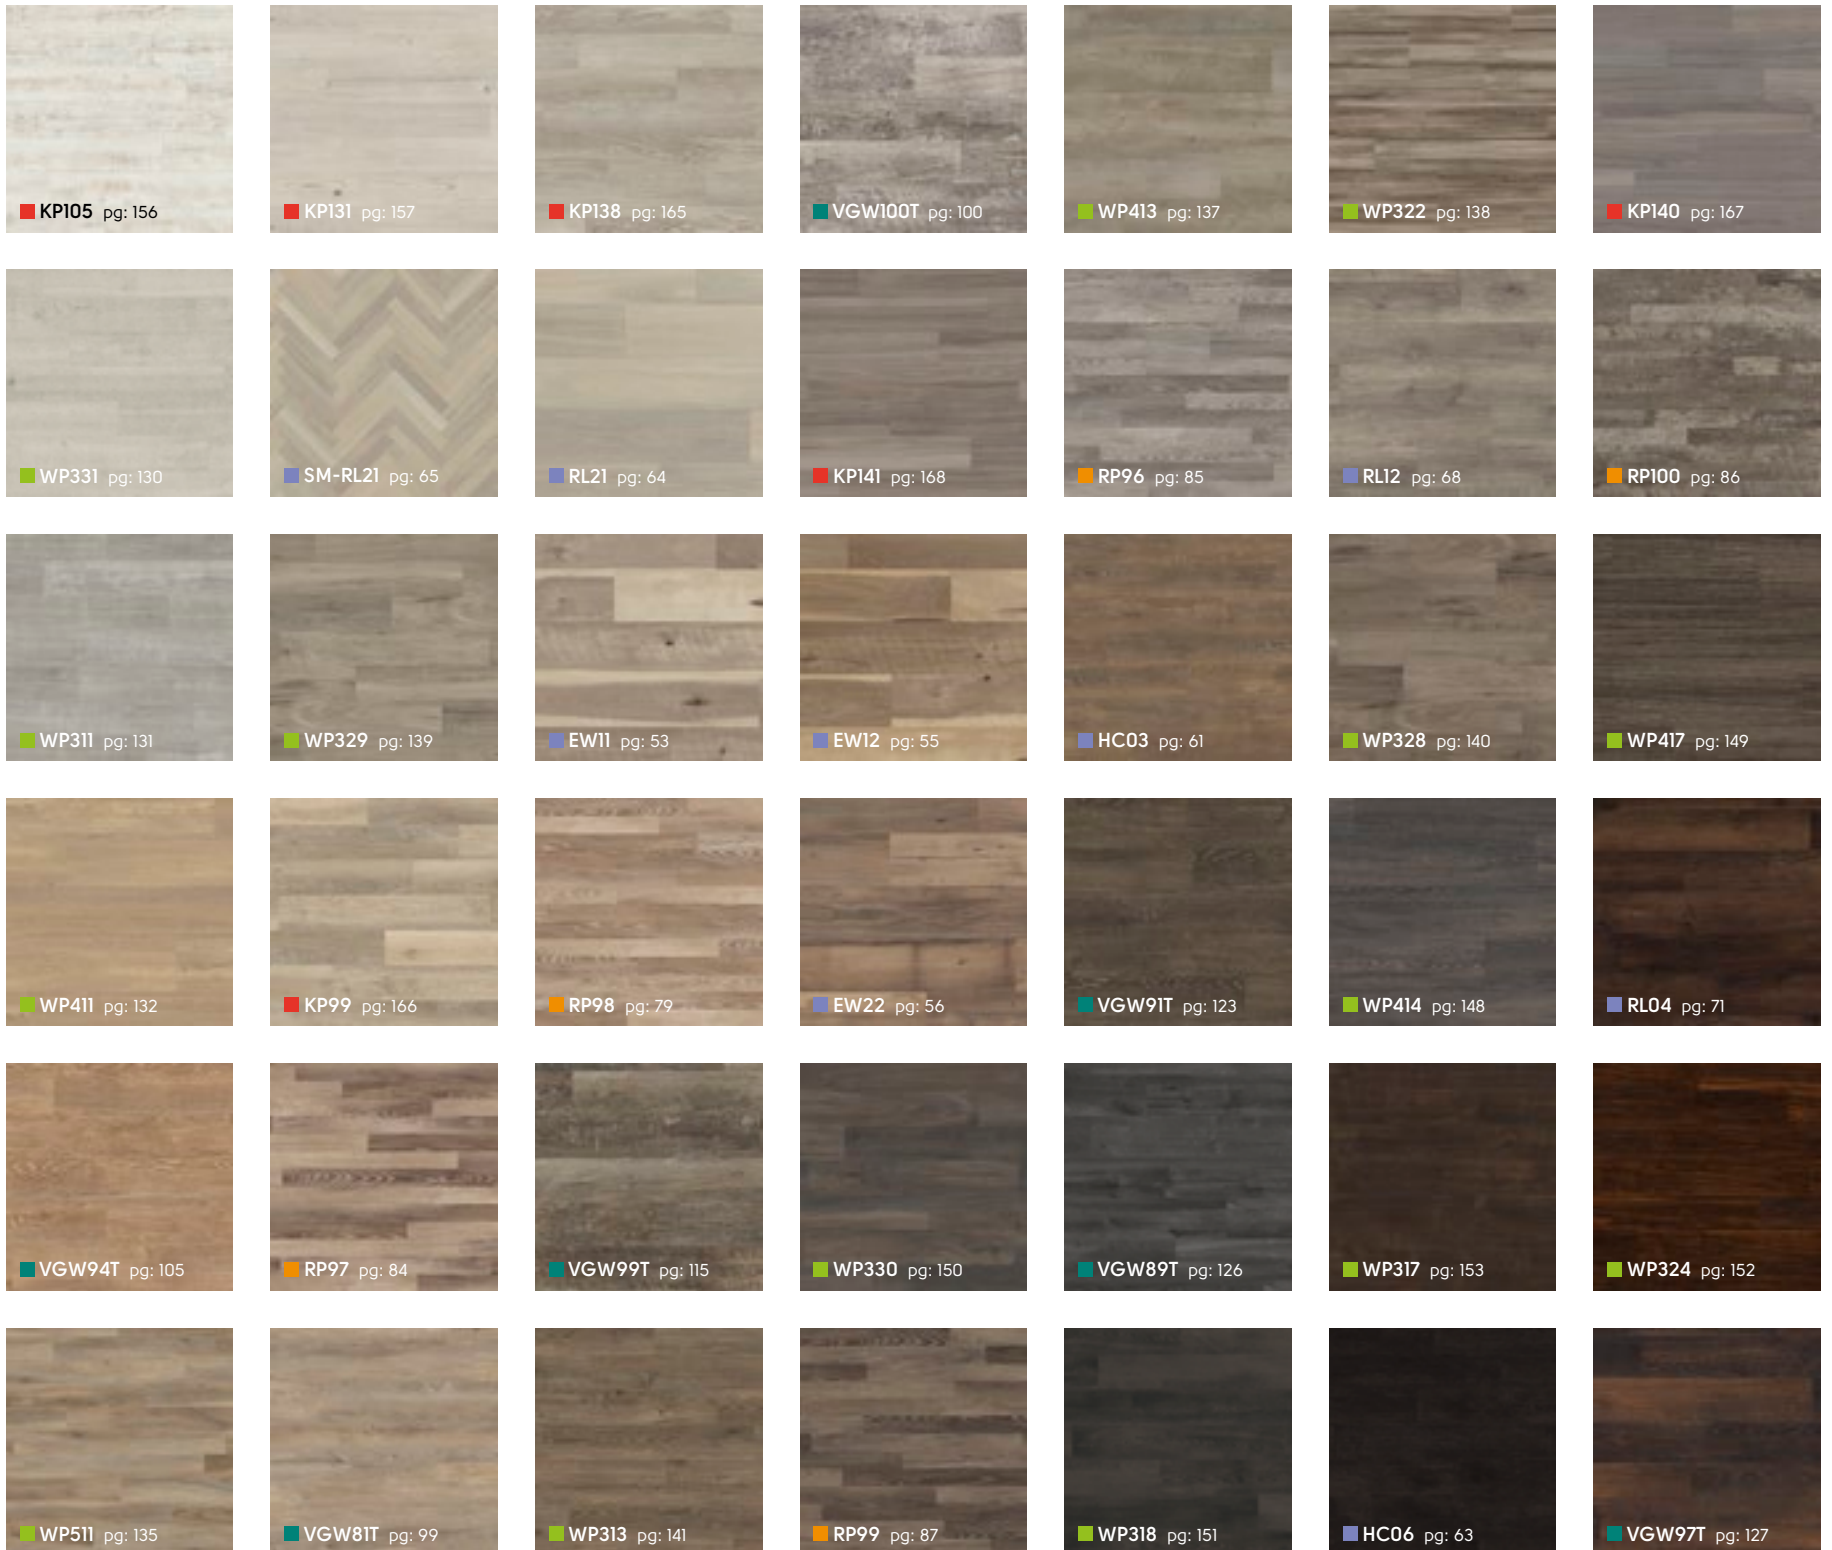

































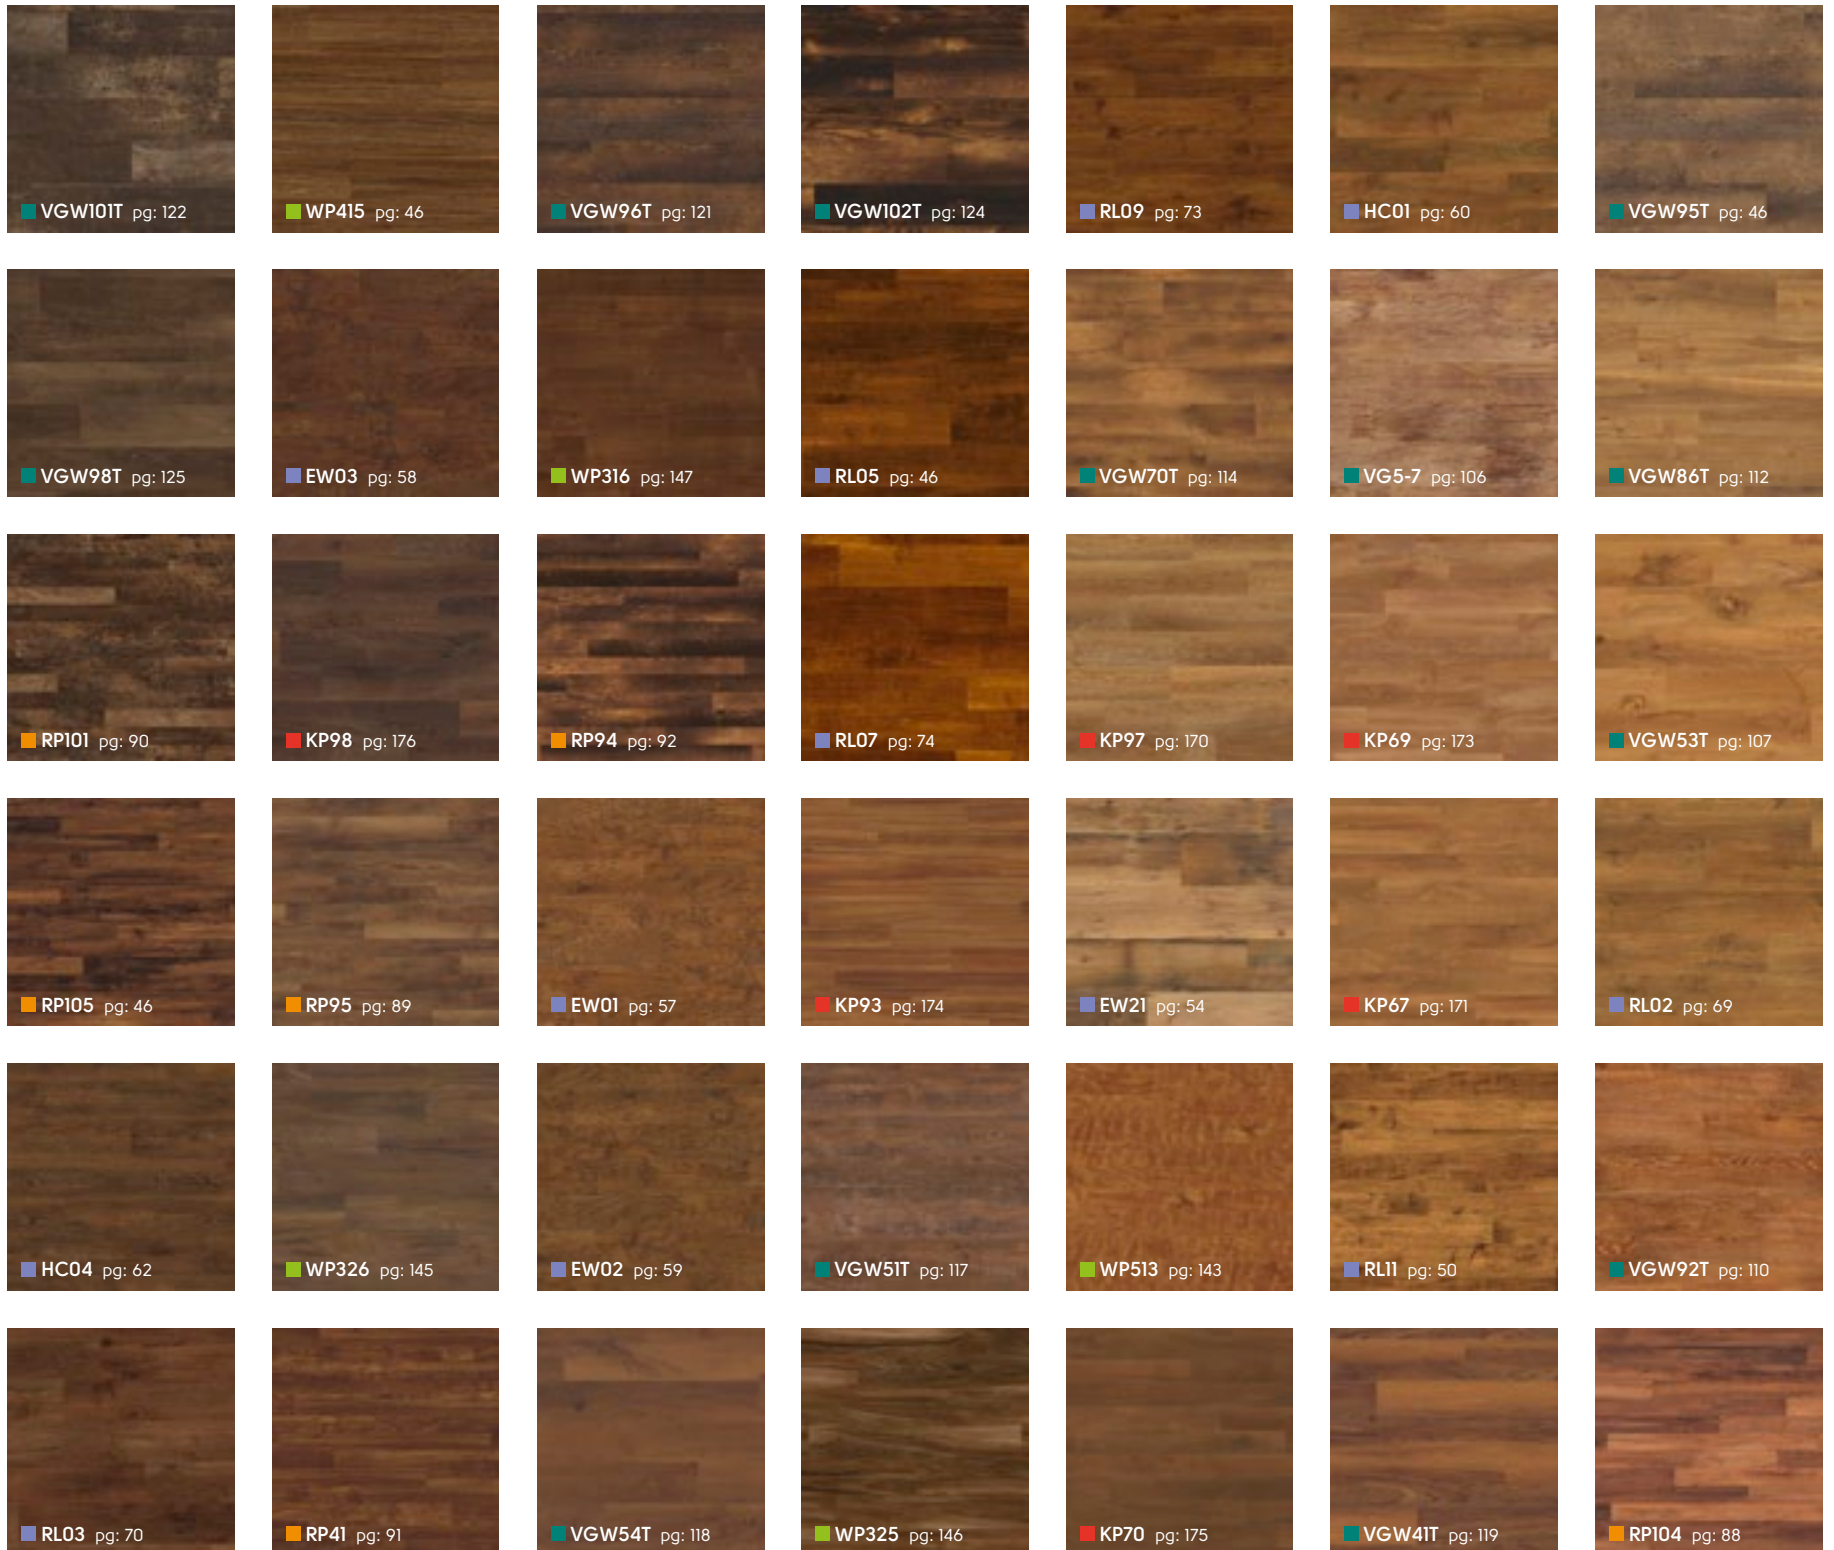








Stone at a glance (gluedown only)

Gluedown: ■ Art Select | ■ Da Vinci | ■ Opus | ■ Knight Tile







LM22 pg: 186




CER17 pg: 205




CER14 pg: 211




LM15 pg: 191



LM21 pg: 188




LM06 pg: 189




ST14 pg: 241




CER21 pg: 210




SP218 pg: 220




SP718 pg: 225




SP215 pg: 217




SP115 pg: 214



SP716 pg: 224



T74 pg: 242



CER12 pg: 209



Fumo SP216

Technical overview (gluedown only)

	Standard	Art Select (see pages 50 and 178)	Da Vinci (see pages 76 and 196)
Thickness		3.0 mm	3.0 mm
Size		Various, see individual product pages	Various, see individual product pages
Box quantity		Various, see individual product pages	Various, see individual product pages
Wear layer		30 mil* (0.7 mm)	30 mil* (0.7 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty**	Commercial Residential	20 Years Lifetime	20 Years Lifetime
Beveled edge		Standard	Standard
Classification	ASTM F1700	Class III Type B	Class III Type B
Reaction to fire	ASTM E648-06	Class I	Class I
Smoke density	ASTM E662-06	Pass (<450)	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass	Pass
Light fastness	ASTM F1515	Pass ΔE = 3.3	Pass ΔE = 3.3
Abrasion resistance	ASTM D3884	115000 cycles	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi	1000 psi
Flexibility	ASTM F137	Pass	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM	Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable	Suitable
Phthalate free		Yes	Yes

* Nominal.

** Subject to terms, see page 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Van Gogh (see page 94)

Opus (see pages 46 and 212)

Knight Tile (see pages 154 and 230)

3.0 mm	2.5 mm	2.0 mm
48" x 7" (1219 mm x 178 mm)	Various, see individual product pages	Various, see individual product pages
15 Planks/35 sq.ft.	Various, see individual product pages	Various, see individual product pages
20 mil (0.5 mm)	20 mil (0.5 mm)	12 mil (0.3 mm)
K-Guard+® PU coating	K-Guard+® PU coating	K-Guard+® PU coating
15 Years Lifetime	15 Years Lifetime	10 Years Lifetime
Micro	Micro	No
Class III Type B	Class III Type B	Class III Type B
Class I	Class I	Class I
Pass (<450)	Pass (<450)	Pass (<450)
Pass	Pass	Pass
Pass (Dry 0.89)	Pass (Dry 0.89)	Pass (Dry 0.88)
Pass	Pass	Pass
Pass ΔE = 3.3	Pass ΔE = 5.0	Pass ΔE = 1.3
115000 Cycles	124000 Cycles	42000 Cycles
Pass -0.002"/lin.ft	Pass -0.004"/lin.ft	Pass 0.0012"/lin.ft
ΔIIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 4 dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
1000 psi	2000 psi	2000 psi
Pass	Pass	Pass
Karndean DrySet K-Spray Karndean Epoxy K99 HM	Karndean DrySet K-Spray Karndean Epoxy K99 HM	Karndean DrySet K-Spray Karndean Epoxy K99 HM
Suitable	Suitable	Suitable
Yes	Yes	Yes

Art Select Wood

Oak Royale

48" x 7" (1219mm x 178mm)



Spring Oak **RL01**

Page: 67




Summer Oak **RL02**

Page: 69



Autumn Oak **RL03**

Page: 70



Winter Oak **RL04**

Page: 71



Storm Oak **RL12**

Page: 68

56" x 9" (1420mm x 228mm)



Glacier Oak **RL21***

Page: 64



Savannah Oak **RL23**

Page: 66

Oak Premier

36" x 6" (915mm x 152mm)



Dawn Oak **HC01**

Page: 60




Dusk Oak **HC03**

Page: 61



Sundown Oak **HC04**


Page: 62



Midnight Oak **HC06**

Page: 63

18" x 3" (457mm x 76mm)



Glacier Oak **SM-RL21***

Page: 65

Handcrafted

36" x 6" (915mm x 152mm)



Hickory Paprika **EW01**

Page: 57



Hickory Peppercorn **EW02**

Page: 59



Hickory Nutmeg **EW03**

Page: 58

56" x 9" (1420mm x 228mm)



Weathered Hickory **EW11**

Page: 53



Vintage Hickory **EW12**

Page: 55



Classic Hickory **EW13**

Page: 52



Reclaimed Chestnut **EW21**

Page: 54



Salvaged Chestnut **EW22**

Page: 56


Maple

4", 5", 7" (102mm, 127mm and 178mm) widths in random lengths



Coffee Maple **RL09**

Page: 73



Toasted Maple **RL11**

Page: 72


Cherry Royale

48" x 7" (1219mm x 178mm)



Spanish Cherry **RL05**

Page: 75



Santina Cherry **RL07**

Page: 74

*Same colour available in different formats, see product page for details.

Art Select Wood

Art Select

GLUEDOWN

Art Select
Wood

Full of charm and character, our premium Art Select wood collection brings the natural beauty of real wood to life in your commercial space. Through meticulous attention to detail and careful selection of some of the most beautiful and inspiring natural woods, our Art Select wood collection includes our most intricate designs and realistic embosses. Everything a beautiful floor should be, and so much more, each of our Art Select woods tells its own story.



■ Vintage Hickory EW12

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 3.3$
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 6$ dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.

** Subject to terms, see page 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Classic Hickory EW13



Karndean
Designflooring

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW13
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Weathered Hickory EW11



Karndean
Designflooring

Art Select
Wood

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW11

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Reclaimed Chestnut EW21



Karndean
Designflooring

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW21
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Vintage Hickory EW12



Karndean
Designflooring

Art Select
Wood

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW12
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Salvaged Chestnut EW22



Karndean
Designflooring

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW22
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Hickory Paprika EW01



Karndean
Designflooring

Art Select
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW01
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Hickory Nutmeg EW03



Karndean
Designflooring

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW03
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Hickory Peppercorn EW02



Karndean
Designflooring

Art Select
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
EW02
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Dawn Oak HC01



Karndean
Designflooring

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC01
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Dusk Oak HC03



Karndean
Designflooring

Art Select
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC03
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sundown Oak HC04



Karndean
Designflooring

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC04
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Midnight Oak HC06



Karndean
Designflooring

Art Select
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
HC06
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Glacier Oak RL21



Karndean
Designflooring

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

This product is also available
in parquet format. See page opposite.

TEXT
RL21

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Glacier Oak SM-RL21



Karndean
Designflooring

Art Select
Wood

Size	18" x 3" (457mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	96 Pieces/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

This product is also available
in parquet format. See page opposite.

TEXT
SM-RL21
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Savannah Oak **RL23**
Karndean
Designflooring

Size	56" x 9" (1420mm x 228mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	10 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL23
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Spring Oak RL01



Karndean
Designflooring

Art Select
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

**TEXT
RL01**

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Storm Oak **RL12**

Karndean
Designflooring

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL12

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Summer Oak RL02



Karndean
Designflooring

Art Select
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL02
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Autumn Oak **RL03**

Karndean
Designflooring

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL03
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Winter Oak RL04



Karndean
Designflooring

Art Select
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL04
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Toasted Maple **RL11**

Karndean
Designflooring

Size	4", 5" and 7" (102mm, 127mm and 178mm) widths in random lengths
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	22 Planks/24 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL11

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Coffee Maple RL09



Karndean
Designflooring

Art Select
Wood

Size	4", 5" and 7" (102mm, 127mm and 178mm) widths in random lengths
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	22 Planks/24 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

**TEXT
RL09**
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Santina Cherry **RL07**
Karndean
Designflooring

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL07
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Spanish Cherry RL05



Karndean
Designflooring

Art Select
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 51

TEXT
RL05
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Da Vinci Wood



36" x 3" (915mm x 76mm)



Page: 91

Australian Walnut **RP41**



Page: 78

Canadian Maple **RP61**



Page: 82

Kenyan Tigerwood **RP73***



Page: 83

Lorenzo Warm Oak **RP91**



Page: 92

Scorched Oak **RP94***



Page: 89

Blended Oak **RP95***



Page: 85

Limed Silk Oak **RP96***



Page: 84

Limed Jute Oak **RP97***



Page: 79

Limed Linen Oak **RP98***



Page: 87

Limed Cotton Oak **RP99***



Page: 86

Coastal Driftwood **RP100***



Page: 90

Beach Driftwood **RP101***



Page: 80

Natural Oak **RP102**



Page: 81

Harvest Oak **RP103**



Page: 88

Single Smoked Acacia **RP104***



Page: 93

Double Smoked Acacia **RP105***

* Please note: as a feature of the design, these products incorporate a high color variation between individual planks.

Da Vinci Wood

Da Vinci

GLEEDOWN

Each of our Da Vinci wood planks features a distinctive beveled edge and light surface finish, creating a traditional and elegant look. With a wide range of colors and designs, from the pale tones of Canadian Maple to the richness of Australian Walnut, there's something to suit any décor.

Our Da Vinci collection is also known for its variety of complementary borders, perfect to create a truly unique space (see page: 248 for borders).

Da Vinci
Wood



■ Limed Silk Oak RP96

	Standard	Result
Thickness		3.0 mm
Size		36" x 3" (915 mm x 76 mm)
Box quantity		48 Planks/36 sq.ft.
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass ΔE = 3.3
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 6 dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.

** Subject to terms, see page: 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Canadian Maple RP61



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 77

**TEXT
RP61**
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Limed Linen Oak RP98



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP98
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Natural Oak RP102



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP102
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Harvest Oak RP103



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP103
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Kenyan Tigerwood RP73



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP73
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lorenzo Warm Oak RP91



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP91

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Limed Jute Oak RP97



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP97

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Limed Silk Oak RP96



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP96
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Coastal Driftwood RP100



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 77

TEXT
RP100
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Limed Cotton Oak RP99



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP99
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Single Smoked Acacia RP104



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP104
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Blended Oak RP95



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP95
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Beach Driftwood RP101



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP101
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Australian Walnut RP41



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP41

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Scorched Oak RP94



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP94
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Double Smoked Acacia RP105



Karndean
Designflooring

Da Vinci
Wood

Size	36" x 3" (915mm x 76mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	48 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 77

TEXT
RP105
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Van Gogh Wood



48" x 7" (1219mm x 178mm)



Bracken **VG1-7**

Page: 116



Burnt Ginger **VG5-7**

Page: 106



Copper Gum **VGW33T**

Page: 109



Antique Karri **VGW39T**

Page: 103



Melbourne Larch **VGW40T**

Page: 98



Merbau **VGW41T***

Page: 119



Jatoba **VGW42T***

Page: 104



Lancewood **VGW44T***

Page: 111



Rimu **VGW49T**

Page: 102



Macrocapra **VGW50T**

Page: 96



Aged Kauri **VGW51T**

Page: 117



Wellington Oak **VGW53T***

Page: 107




Christchurch Oak **VGW54T***

Page: 118




Smoked Oak **VGW70T**

Page: 114



Reclaimed Maple **VGW71T**

Page: 101



Vintage Pine **VGW76T***

Page: 108



Country Oak **VGW81T**

Page: 99



French Oak **VGW85T**

Page: 97



Classic Oak **VGW86T**

Page: 112



Ebony **VGW89T**

Page: 126



Tawny Oak **VGW91T**

Page: 123



Burgundy Oak **VGW92T**

Page: 110



Hessian Oak **VGW93T**

Page: 113



Honey Oak **VGW94T**

Page: 105



Lime Washed Cypress **VGW95T**

Page: 120



Burnished Cypress **VGW96T**

Page: 121



Burnished Beech **VGW97T**

Page: 127



Smoked Beech **VGW98T**

Page: 125



Reclaimed Redwood **VGW99T***

Page: 115



Aged Redwood **VGW100T***

Page: 100



Salvaged Redwood **VGW101T***

Page: 122



Charred Oak **VGW102T***

Page: 124

* Please note: as a feature of the design, these products incorporate a high colour variation between individual planks.

Van Gogh Wood



Our popular Van Gogh collection captures the look of real wood in a variety of colors and designs from traditional rustic to cool contemporary. Large plank sizes, distinctive grain details and a subtle texture create a look that works in any space.

The Van Gogh range is a wood-only collection made up of 32 large-scale 48" x 7" planks. With its depth, wear layer and texture, Van Gogh is one of our most popular ranges and is perfect for areas with high foot traffic, such as retail, education and hospitality environments, as well as in the home.



	Standard	Result
Thickness		3.0 mm
Size		48" x 7" (1219 mm x 178 mm)
Box quantity		15 Planks/35 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 3.3$
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 6$ dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Macrocapra VGW50T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW50T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

French Oak VGW85T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW85T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Melbourne Larch VGW40T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW40T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Country Oak VGW81T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW81T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Redwood VGW100T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW100T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed Maple VGW71T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW71T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Rimu VGW49T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW49T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Antique Karri VGW39T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW39T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Jatoba VGW42T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW42T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Honey Oak VGW94T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW94T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burnt Ginger VG5-7



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.89)

Technical Specifications:
Page: 95

TEXT
VG5-7
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Wellington Oak VGW53T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW53T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Vintage Pine VGW76T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW76T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Copper Gum VGW33T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW33T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burgundy Oak VGW92T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW92T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lancewood VGW44T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW44T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Classic Oak VGW86T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW86T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Hessian Oak VGW93T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW93T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked Oak VGW70T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW70T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed Redwood VGW99T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW99T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Bracken VG1-7



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VG1-7
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Kauri VGW51T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW51T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Christchurch Oak VGW54T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW54T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Merbau VGW41T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW41T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lime Washed Cypress VGW95T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW95T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burnished Cypress VGW96T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW96T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Salvaged Redwood VGW101T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW101T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Tawny Oak VGW91T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW91T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Charred Oak VGW102T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW102T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked Beech VGW98T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW98T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ebony VGW89T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW89T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burnished Beech VGW97T



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1219mm x 178mm)
Thickness	3.0 mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	15 Planks/35 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 95

TEXT
VGW97T
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Opus Wood

Opus Enhance

Our most popular Opus products are available with enhanced slip resistance. Ask your Karndean Commercial Business Manager for more information.



36" x 6" (915mm x 152mm)



Grano **WP311**

Page: 131



Carbo **WP318**

Page: 151



Washed Walnut **WP328**

Page: 140



Palleo **WP312**

Page: 133



Luteus **WP321**

Page: 142



Bleached Grey Walnut **WP329**

Page: 139



Igneae **WP313**

Page: 141



Canitia **WP322**

Page: 138



Tenebra Walnut **WP330**

Page: 150



Aurum **WP315**

Page: 136



Tergo **WP324**

Page: 152



Textum **WP331**

Page: 130




Rubra **WP316**

Page: 147



Arrado **WP325**

Page: 146



Weathered Elm **WP511**

Page: 135




Atra **WP317**

Page: 153



Natural Walnut **WP326**

Page: 145



Golden Teak **WP513**

Page: 143

48" x 9" (1219mm x 228mm)



Niveus **WP411**

Page: 132



Ordo **WP415**

Page: 144



Magna **WP413**

Page: 137



Linea **WP416**

Page: 134



Argen **WP414**


Page: 148



Sylva **WP417**

Page: 149

Opus Wood



Our Opus woods offer fresh, contemporary visuals across a wide range of plank sizes, from 36" x 4" to 48" x 9". Unique to this range is Textum, a hybrid abstract visual that can act as a wood, a stone with a woven overlay or a stained concrete. From the rustic, neutral Ignea to the clean, modern look of Washed Walnut, the Opus range has a look to fit any project.



Linea WP416

	Standard	Result
Thickness		2.5 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass ΔE = 5.0
Abrasion resistance	ASTM D3884	124000 Cycles
Dimensional stability	ASTM F2199	Pass -0.004"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.



Textum WP331



Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP331
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grano WP311



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP311
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Niveus WP411



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP411
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Palleo WP312



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP312
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Linea WP416



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP416
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Weathered Elm WP511



Karndean
Designflooring

Opus
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP511
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aurum WP315



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP315
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Magna WP413



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP413
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Canitia WP322



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP322
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Bleached Grey Walnut WP329



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP329
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Washed Walnut WP328



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP328
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ignea WP313



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP313
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Luteus WP321



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP321
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Golden Teak WP513



Karndean
Designflooring

Opus
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP513
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ordo WP415



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.89)

Technical Specifications:
Page: 129

TEXT
WP415
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Natural Walnut WP326



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP326
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Arrado WP325



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP325
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Rubra WP316



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP316
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Argen WP414



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP414
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sylva WP417



Karndean
Designflooring

Opus
Wood

Size	48" x 9" (1219mm x 228mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP417
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Tenebra Walnut WP330



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP330
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Carbo WP318



Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP318
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Tergo WP324



Karndean
Designflooring

Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP324
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Atra WP317



Opus
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 129

TEXT
WP317
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Knight Tile Wood

36" x 4" (915mm x 102mm)



Page: 159

Sycamore **KP32**



Page: 160

Cedar **KP35**



Page: 163

Walnut **KP36**



Page: 161

Elm **KP37**



Page: 162

Warm Oak **KP39**



Page: 171

Aran Oak **KP67***



Page: 173

Larne Oak **KP69***



Page: 175

Bray Oak **KP70***



Page: 158

Honey Maple **KP90**



Page: 174

Native Koa **KP93**



Page: 172

Sienna **KP107**

36" x 6" (915mm x 152mm)



Page: 164

Pale Limed Oak **KP94***



Page: 169

Mid Limed Oak **KP96***



Page: 170

Classic Limed Oak **KP97***



Page: 176

Aged Oak **KP98***



Page: 166

Lime Washed Oak **KP99***



Page: 156

White Painted Pine **KP105***



Page: 157

Grey Scandi Pine **KP131**



Page: 165

Grey Limed Oak **KP138**



Page: 167

Nickel Spotted Gum **KP140**



Page: 168

Urban Spotted Gum **KP141**

* Please note: as a feature of the design, these products incorporate a high color variation between individual planks.

Knight Tile Wood

Knight Tile

GLUEDOWN

Our Knight Tile wood range offers a wide variety of species and visuals, from limed oaks to painted pine, across classic and contemporary colors. Simply choose the look that best corresponds with your project's style.



■ White Painted Pine KP105

	Standard	Result
Thickness		2.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		12 mil (0.3 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	10 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.88)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 1,3$
Abrasion resistance	ASTM D3884	42000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0012"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 4$ dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Knight Tile
Wood

White Painted Pine **KP105**



Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.88)

Technical Specifications:
Page: 155

TEXT
KP105
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Scandi Pine **KP131**



Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.88)

Technical Specifications:
Page: 155

**TEXT
KP131
to 877-850-0376**
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Honey Maple KP90



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP90
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sycamore KP32



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP32
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Cedar KP35



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP35
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Elm KP37



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP37
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Warm Oak KP39



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP39
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Walnut KP36



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP36
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Pale Limed Oak **KP94**



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP94
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Limed Oak KPI38



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KPI38
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lime Washed Oak KP99



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP99
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Nickel Spotted Gum KP140



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP140
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Urban Spotted Gum KP141



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.88)

Technical Specifications:
Page: 155

TEXT
KP141
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Mid Limed Oak KP96



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP96
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Classic Limed Oak KP97



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP97
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aran Oak KP67



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP67
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sienna KP107



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP107
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Larne Oak KP69



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP69
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Native Koa KP93



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.88)

Technical Specifications:
Page: 155

TEXT
KP93
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Bray Oak **KP70**



Karndean
Designflooring

Knight Tile
Wood

Size	36" x 4" (915mm x 102mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP70
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Oak **KP98**



Knight Tile
Wood

Size	36" x 6" (915mm x 152mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Planks/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 155

TEXT
KP98
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.




Knight Tile
Wood


■ Pale Lined Oak KP94

Art Select Stone


Slate 18" x 24" (457mm x 610mm)




Melbourne **LM05**

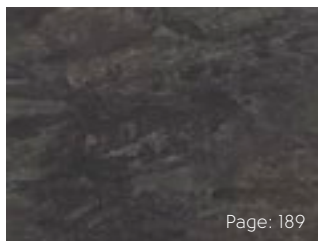

Canberra **LM06**



Oakeley **LM21**



Corris **LM22**

Marble 16" x 16" (406mm x 406mm)



Otono **LM15**



Fiore **LM16**


Limestone 36" x 36" (915mm x 915mm) Random Panel**



Jersey **LM01**



Guernsey **LM02**

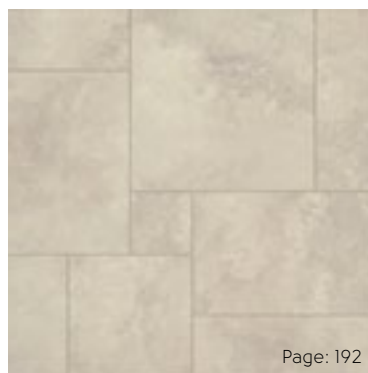


Alderney **LM03**




Herm **LM20**


Travertine 18" x 24" (457mm x 610mm)



Washburn **LM07***



Caldera **LM08***



Gallatin **LM09***

6" x 36" (152mm x 915mm)



Washburn **LM27***



Caldera **LM28***



Gallatin **LM29***

* Same color available in different formats, see product page for details.

** Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

Art Select Stone

Art Select

GLUEDOWN

Our Art Select stone collection is made up of four distinctive sub-ranges, providing an assortment of distinctive looks: Travertine, Slate, Marble and Limestone. Our Travertines offer three mid-toned designs in either 18" x 24" tiles or 6" x 36" plank-shaped tiles. Lay each size on its own or with its complementary full-sized tiles, creating a stylish room-to-room layout. Developed from Australian and Welsh slates, the Slate sub-range reflects the true rugged texture and charm of the natural stone in 18" x 24" tiles. For a project that requires classic elegance, opt for our two 16" x 16" Marble designs. Or choose from our four random panel Limestones, which capture the character and dappled texture of natural limestone.



■ Canberra LM06

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 3.3$
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 6$ dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.

** Subject to terms, see page: 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Art Select
Stone

Washburn LM07



Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 179

Decorative Strip Shown:
DS10 (3mm)

This color is also available in a
6" x 36" format, see page opposite.

**TEXT
LM07
to 877-850-0376**
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Washburn LM27



Karndean
Designflooring

Art Select
Stone

Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a
18" x 24" format, see page opposite.

TEXT
LM27
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Gallatin LM09



Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 179

Decorative Strip Shown:
DS15 (3mm)

This color is also available in a
6" x 36" format, see page opposite.

**TEXT
LM09
to 877-850-0376**
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Gallatin LM29



Karndean
Designflooring

Art Select
Stone

Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a
18" x 24" format, see page opposite.

TEXT
LM29
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Caldera LM08



Karndean
Designflooring

Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

This color is also available in a
6" x 36" format, see page opposite.

TEXT
LM08
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Caldera **LM28**



Karndean
Designflooring

Art Select
Stone

Size	6" x 36" (152mm x 915mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

This color is also available in a
18" x 24" format, see page opposite.

TEXT
LM28
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Corris LM22



Karndean
Designflooring

Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

TEXT
LM22
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Melbourne LM05



Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS16 (3mm)

TEXT
LM05
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Oakeley LM21



Karndean
Designflooring

Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

TEXT
LM21

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Canberra LM06



Karndean
Designflooring

Art Select
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

Decorative Strip Shown:

DS10 (3mm)

TEXT
LM06
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Fiore LM16



Art Select
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

**TEXT
LM16**
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Otono LM15



Karndean
Designflooring

Art Select
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

TEXT
LM15
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Alderney LM03



Art Select
Stone

Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

**TEXT
LM03
to 877-850-0376**

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Jersey LM01



Karndean
Designflooring

Art Select
Stone

Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

TEXT
LM01
to 877-850-0376

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Guernsey LM02



Art Select
Stone

Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.

TEXT
LM02
to 877-850-0376

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Herm LM20



Karndean
Designflooring

Art Select
Stone

Size	36" x 36" (915mm x 915mm) Random Panel*
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	4 Panels & 4 offsetting Tiles/40 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 179

*Each panel is created from nine assorted tiles with design strips. Offsetting tiles are also included to create a natural look.


TEXT
LM20
to 877-850-0376

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Da Vinci Stone




12" x 18" (305mm x 457mm)

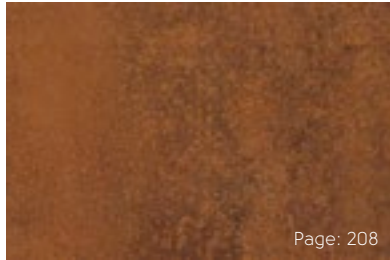


Page: 208

Molten **CER11***

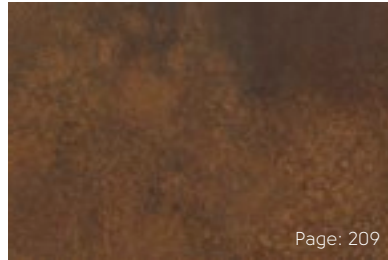


Page: 209

Iron Ore **CER12***

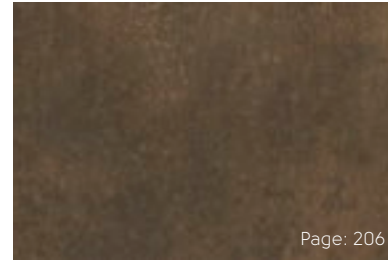


Page: 206

Eisen **CER13***

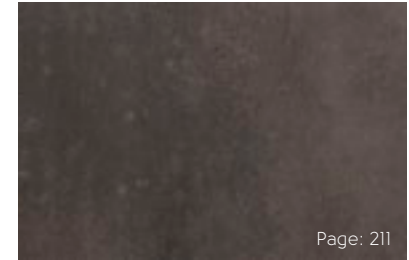


Page: 211

Carbon **CER14***

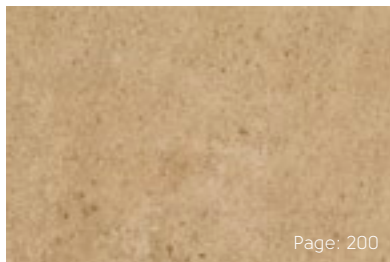


Page: 200

Dune **CER15**

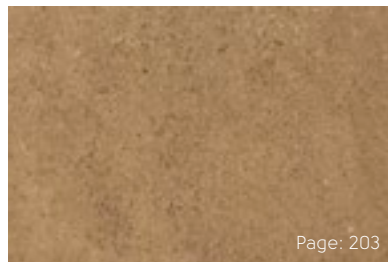


Page: 203

Sable **CER16**

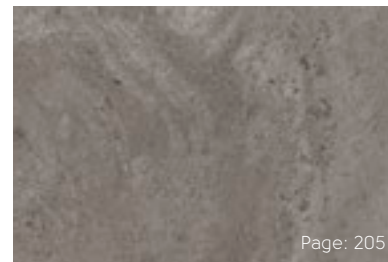


Page: 205

Drift **CER17**

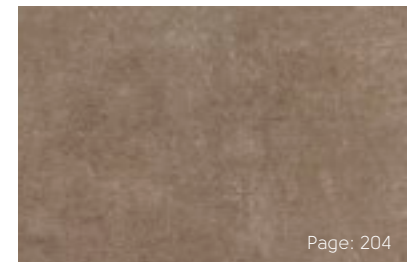


Page: 204

Burnet **CER19**

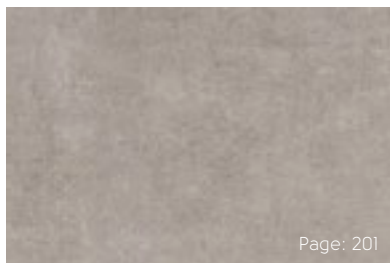

Page: 201

Cambric **CER20**

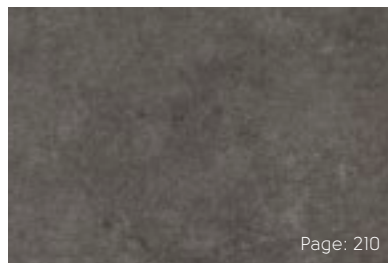

Page: 210

Sindon **CER21**

16" x 16" (406mm x 406mm)




Page: 207

Oxide **CC08**



Page: 198

Piazza Limestone **LST03**



Page: 199

Spirito Limestone **LST04**



Page: 202

Santi Limestone **LST05**


*Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

Da Vinci Stone

Da Vinci

GLUEDOWN

Our Da Vinci collection offers the rich textures of natural stone, slate and metal, with a comforting warmth unique to Karndean Designflooring. The beveled edges add definition to each tile and a range of design strips enables you to choose a finishing touch to complete your look (for full details on strips and borders, please see pages: 246-248). Choose from 12" x 18" or 16" x 16" tiles available in a wide range of colors and effects.

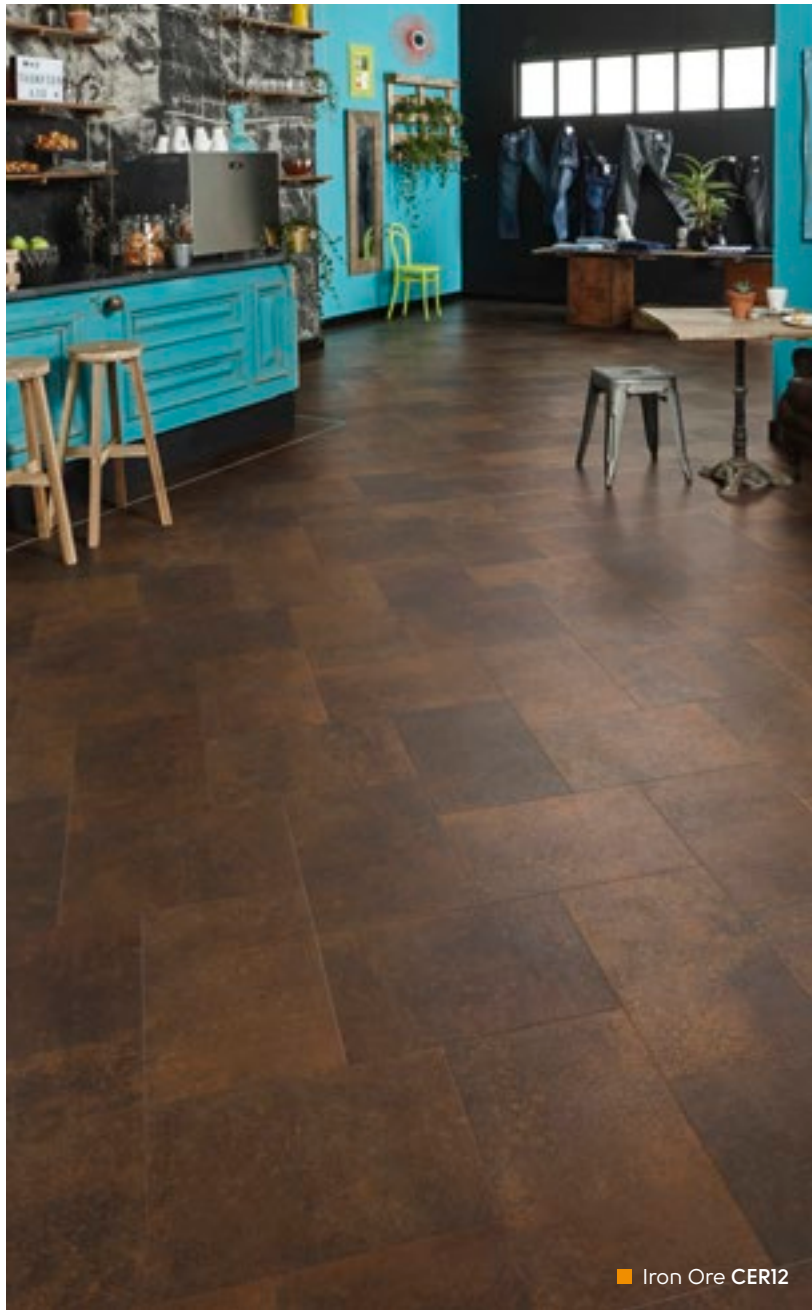

■ Iron Ore CER12

	Standard	Result
Thickness		3.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		30 mil* (0.7 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	20 Years Lifetime
Beveled edge		Standard
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 3.3$
Abrasion resistance	ASTM D3884	115000 Cycles
Dimensional stability	ASTM F2199	Pass -0.002"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 6$ dB IIC = 46 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Nominal.

** Subject to terms, see page: 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Da Vinci
Stone

Piazza Limestone LST03



Da Vinci
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
LST03
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Spirito Limestone LST04



Karndean
Designflooring

Da Vinci
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS16 (3mm)

TEXT
LST04
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Dune CER15



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS10 (3mm)

TEXT
CER15
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Cambric CER20



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS20 (3mm)

TEXT
CER20
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Santi Limestone LST05



Karndean
Designflooring

Da Vinci
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS10 (3mm)

TEXT
LST05
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sable CER16



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER16
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burnet CER19



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER19
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Drift CER17



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER17
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Eisen CER13



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS15 (3mm)

TEXT
CER13
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Oxide CC08



Karndean
Designflooring

Da Vinci
Stone

Size	16" x 16" (406mm x 406mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	20 Tiles/35.6 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS20 (3mm)

TEXT
CC08
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Molten CER11



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

TEXT
CER11
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Iron Ore CER12



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

AF07 (3mm)

TEXT
CER12
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Sindon CER21



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER21
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Carbon CER14



Karndean
Designflooring

Da Vinci
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	3.0mm
Wear Layer	30mil (0.7mm)
Bevel	Standard
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 197

Decorative Strip Shown:

DS12 (3mm)

TEXT
CER14
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.


Opus Stone

Opus Enhance

Our most popular Opus products are available with enhanced slip resistance. Ask your Karndean Commercial Business Manager for more information.




18" x 24" (457mm x 610mm)



Page: 215

Terra **SP212**



Page: 216


Urbus **SP213**

18" x 36" (457mm x 915mm)




Page: 223

Clarus **SP714**



Page: 217

Ferra **SP215**




Page: 219

Fumo **SP216**



Page: 224

Aurego **SP716***




Page: 220

Lutum **SP218**

Heritage Collection


18" x 18" (457mm x 457mm)



Page: 214

Nero **SP115**

18" x 3" (457mm x 76mm)



Page: 218

Fumo **SM-SP216**

36" x 6" (915mm x 152mm)



Page: 225

Texo **SP718***

9" x 9" (228mm x 228mm)**



Page 226

Clifton **CLIF-01**



Page 227

Clifton **CLIF-04**

18" x 24" (457mm x 610mm)



Page: 221


Casablanca **SP219**



Page: 222


Marrakesh **SP220**

12" x 12" (305mm x 305mm)**



Page 228

Mayfair **MAYF-01**



Page 229

Mayfair **MAYF-02**

* Same color available in different formats, see product page for details.

** Consists of various mosaic pieces held together with face tape.

Opus Stone

Opus

GLUEDOWN

Our Opus stones offer fresh, contemporary visuals in some of our largest tile sizes, perfect for commercial applications. Visuals in this collection feature the looks of brushed, stained and polished concrete, travertine and limestone. One of our designs is available in compatible 6" x 36" planks and 18" x 36" sizes, which allow for additional design flexibility.

Two geometric patterns within Opus are part of the new Heritage Collection, which denotes products that embody the pinnacle of designed flooring. These designs are intended for highly skilled flooring mechanics, as the individual geometric pieces form intricate patterns when assembled.



Clarus SP714

	Standard	Result
Thickness		2.5 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.89)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass ΔE = 5.0
Abrasion resistance	ASTM D3884	124000 Cycles
Dimensional stability	ASTM F2199	Pass -0.004"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 4 dB IIC = 44 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Opus
Stone

Nero SPI15



Karndean
Designflooring

Opus
Stone

Size	18" x 18" (457mm x 457mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	16 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS07 (3mm)

TEXT
SPI15
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Terra SP212



Karndean
Designflooring

Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS10 (3mm)

TEXT
SP212
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Urbus SP213



Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS10 (3mm)

TEXT
SP213
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ferra SP215



Karndean
Designflooring

Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS17 (3mm)

TEXT
SP215
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Fumo SM-SP216



Karndean
Designflooring

Opus
Stone

Size	18" x 3" (457mm x 76mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	96 pieces/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS10 (3mm)

TEXT
SM-SP216
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Fumo SP216



Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS10 (3mm)

TEXT
SP216
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lutum SP218



Karndean
Designflooring

Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
SP218
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Casablanca SP219



Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
SP219
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Marrakesh SP220



Karndean
Designflooring

Opus
Stone

Size	18" x 24" (457mm x 610mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	12 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
SP220
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Clarus SP714



Opus
Stone

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS20 (3mm)

TEXT
SP714
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aurego SP716



Karndean
Designflooring

Opus
Stone

Size	18" x 36" (457mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	8 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

Decorative Strip Shown:

DS16 (3mm)

This color is also available in a
6" x 36" format, see page opposite.

TEXT
SP716
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Texo SP718



Karndean Designflooring

Opus
Stone

Size	6" x 36" (152mm x 915mm)
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

This color is also available in a
18" x 36" format, see page opposite.

**TEXT
SP718
to 877-850-0376**

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Clifton CLIF-01



Karndean
Designflooring

Heritage
Collection

Opus
Stone

Size	9" x 9" (229mm x 229mm)**
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Standard
Box Quantity	32 Tiles/18 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
CLIF-01
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

**Consists of various mosaic pieces held together with face tape.

Clifton **CLIF-04**



Karndean
Designflooring

Heritage
Collection

Opus
Stone

Size	9" x 9" (229mm x 229mm)**
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Standard
Box Quantity	32 Tiles/18 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
CLIF-04
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

**Consists of various mosaic pieces held together with face tape.

Mayfair **MAYF-01**



Karndean
Designflooring

Heritage
Collection

Opus
Stone

Size	12" x 12" (305mm x 305mm)**
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Standard
Box Quantity	16 Tiles/16 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213

TEXT
MAYF-01
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

**Consists of various mosaic pieces held together with face tape.

Mayfair **MAYF-02**



Karndean
Designflooring

Heritage
Collection

Opus
Stone

Size	12" x 12" (305mm x 305mm)**
Thickness	2.5mm
Wear Layer	20mil (0.5mm)
Bevel	Standard
Box Quantity	16 Tiles/16 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.89)

Technical Specifications:

Page: 213


TEXT
MAYF-02
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.


**Consists of various mosaic pieces held together with face tape.

Knight Tile Stone


12" x 12" (305mm x 305mm)




Soapstone **ST5**




Midnight Black **T74**




Copper **T84**



Andecite **T89**




Carrara **T90**




Rona **T99**


12" x 18" (305mm x 457mm)

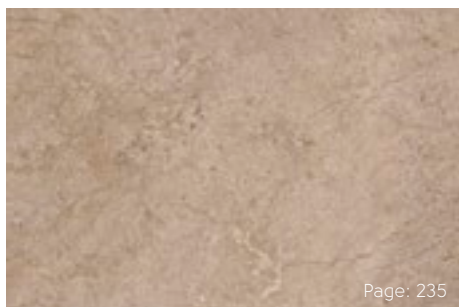

Bath Stone **ST12**

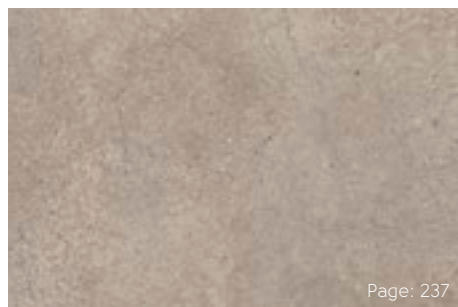

Portland Stone **ST13**

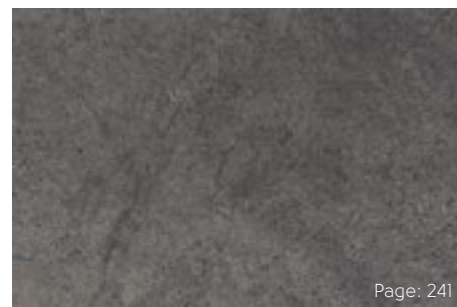

Cumbrian Stone **ST14**



Grey River Slate **ST16**



Honed Oyster Slate **ST17**

Knight Tile Stone



Our Knight Tile stone range offers an array of styles inspired by slate, limestone and marble, and offers a versatile selection of design components to complement any chosen floor. Compared to natural stone, Knight Tile is warmer, quieter underfoot and easier to maintain, making it the ideal solution for multi-unit properties, retail spaces and restaurant facilities.



■ Grey Riven Slate ST16

	Standard	Result
Thickness		2.0 mm
Size		Various, see individual product pages
Box quantity		Various, see individual product pages
Wear layer		12 mil (0.3 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	10 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.88)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 1,3$
Abrasion resistance	ASTM D3884	42000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0012"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 4$ dB IIC = 43 dB (6" slab w/drop ceiling) IIC = 70 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	2000 psi
Flexibility	ASTM F137	Pass
Adhesive		Karndean DrySet K-Spray Karndean Epoxy K99 HM
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Carrara T90



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

**TEXT
T90**
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Honed Oyster Slate **ST17**



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS12 (3mm)

TEXT
ST17

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Soapstone **ST5**



Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.88)

Technical Specifications:
Page: 231

Decorative Strip Shown:
DS15 (3mm)

**TEXT
ST5**
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Bath Stone ST12



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST12

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Rona T99



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS16 (3mm)

TEXT
T99

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Portland Stone ST13



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST13

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Grey Riven Slate ST16



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS12 (3mm)

TEXT
ST16

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Andecite T89



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS20 (3mm)

TEXT
T89

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Copper T84



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS20 (3mm)

TEXT
T84

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Cumbrian Stone ST14



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 18" (305mm x 457mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	24 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS10 (3mm)

TEXT
ST14

to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Midnight Black T74



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 12" (305mm x 305mm)
Thickness	2.0mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	36 Tiles/36 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.88)

Technical Specifications:

Page: 231

Decorative Strip Shown:

DS17 (3mm)

TEXT
T74

to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.



Knight Tile
Stone

■ Cumbrian Stone ST14 with DS10 3mm design strip

















Design components

Design components

Design strips


Design strips are narrow pieces of luxury vinyl tile which can be put between our planks and tiles. They allow you to finish off the design of your floor with some realistic touches, such as adding a strip to create a grout effect between tiles (example on page: 15) or between planks for a ship lap effect (example on page: 14). Design strips are available in a variety of colors and widths. The wider the strip, or bolder the color, the more impact it will have, and the beauty of our strips versus real grout is that they won't stain or fade, and they don't have to be sealed.

The choice of color is completely up to you. You may want to choose a design strip in a color that matches the walls, for example, to help tie in elements that are already in your room to your new floor. Alternatively, you could choose a color which helps the overall look of your floor feel either more contemporary or more traditional, enhancing the design of the product you've chosen.

Design strip		compatible with	widths
Vanilla DS01		 Available for use with all our floors.	3mm and 10mm
Honey DS03			
Coffee DS04			
Russet DS05			
Chocolate DS06			
Ebony DS07			
Carbon Cross Grain DS09			
Chalk DS10			
Concrete DS12			
Clay DS15			
Charcoal DS16			
Silver DS17			
Sand DS20			

Grout strip		compatible with	widths
Beige AF06		 Available for use with Art Select*, Da Vinci*, Opus and Knight Tile floors.	3mm
Ivory AF05			
Taupe AF04			
Brown AF02			
Chestnut AF07			
Black AF01			

Feature strip		compatible with	widths
Beige		 Available for use with Art Select*, Da Vinci*, Opus and Knight Tile** floors.	5mm
Gray			
Brown			
Gold			
Light Brown			
Black			

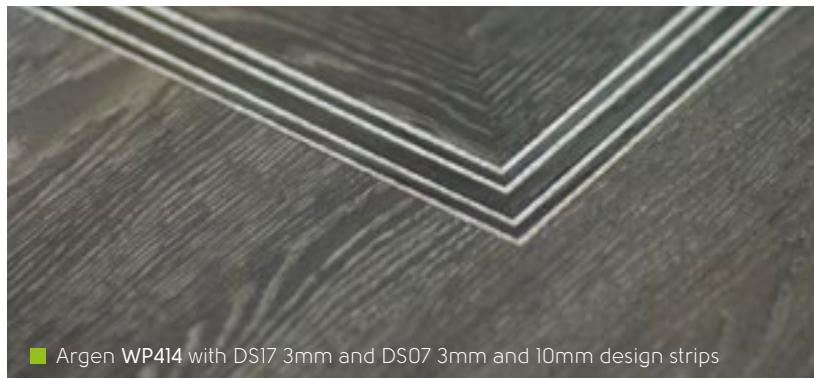

* Due to Art Select and Da Vinci's beveled edge, these strips can only be used between planks or tiles and not along a cut edge.

** Knight Tile feature strip is supplied FREE on request with Knight Tile products only (82 linear ft per tube). One tube of feature strip provides enough material for one box of Knight Tile product. Supplied free, only if delivered with Knight Tile, as one consignment.

Decorative borders



Define the perimeter of your space with decorative style. We offer a variety of decorative borders to complement our gluedown ranges. Choose a sleek, single tone option, such as Accent or a strong, distinctive pattern like Zigzag.

Border		use with		made up of	width	length
Accent			CER14	CER14	1.5"	36"
Block			RP41	RP41/DS01	3"	36"
Dark Mackintosh			ST14	ST14/ST13/DS10	2"	37"
Dark Mosaic			ST12	ST12/ST13/ST14/DS10	1"	35.5"
			ST13			
			ST14			
Davyne			CER15	CER15/AF06	3"	35"
Davyne			CER16	CER16/CER15/AF06	3"	35"
Diamond			T90	T90/T74	3"	36"
Diamond			LM16	LM15/LM16	2.5"	36"
Diamond			CLIF-01	SP115/V20	4.24"	33.94"
			CLIF-04			
			MAYF-01			
			MAYF-02			

Border		use with		made up of	width	length
Kousa		■ CER20	CER20	CER20/CER21	1.8"	35.5"
Kousa Framed		■ CER19	CER19	CER19/DS12	3"	34"
Leaf		■ KPI07	KPI07	KPI07/KP40	4"	36"
Light Mackintosh		■ ST13	ST13	ST13/ST14/DS10	2"	37"
		■ ST14	ST14			
Light Mosaic		■ ST11	ST11	ST11/ST12/ST13/DS10	1"	35.5"
		■ ST12	ST12			
		■ ST13	ST13			
Mackintosh		■ LST04	LST04	LST04/LST05/DS10	2"	37"
		■ LST05	LST05			
Mosaic		■ LST03	LST03	LST03/LST04/ LST05/DS10	1"	35.5"
		■ LST04	LST04			
		■ LST05	LST05			
Quadrant		■ CER13	CER13	CER13	2"	36"
Regent		■ KP70	KP70	KP40/KP70	2"	36"
Weave		■ RP61	RP61	RP02/RP11/RP61	3"	36"
Windsor		■ ST16	ST16	ST16/DS12	2"	36"
Zigzag		■ LM22	LM22	CC06/LM22//LM16	2.5"	36"
		■ CC06	CC06			

Custom cutting


With Karndean Designflooring, you really can design the floor you want. We offer an in-house custom cutting service which allows you to incorporate a company logo, a motif or simply an additional design element into your floor, all cut from your favorite Karndean products.

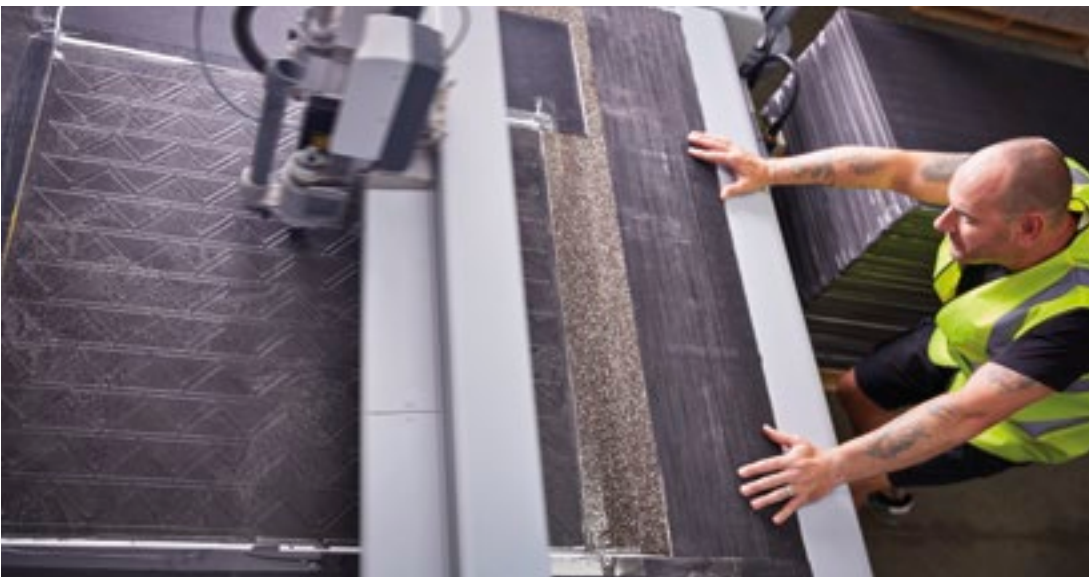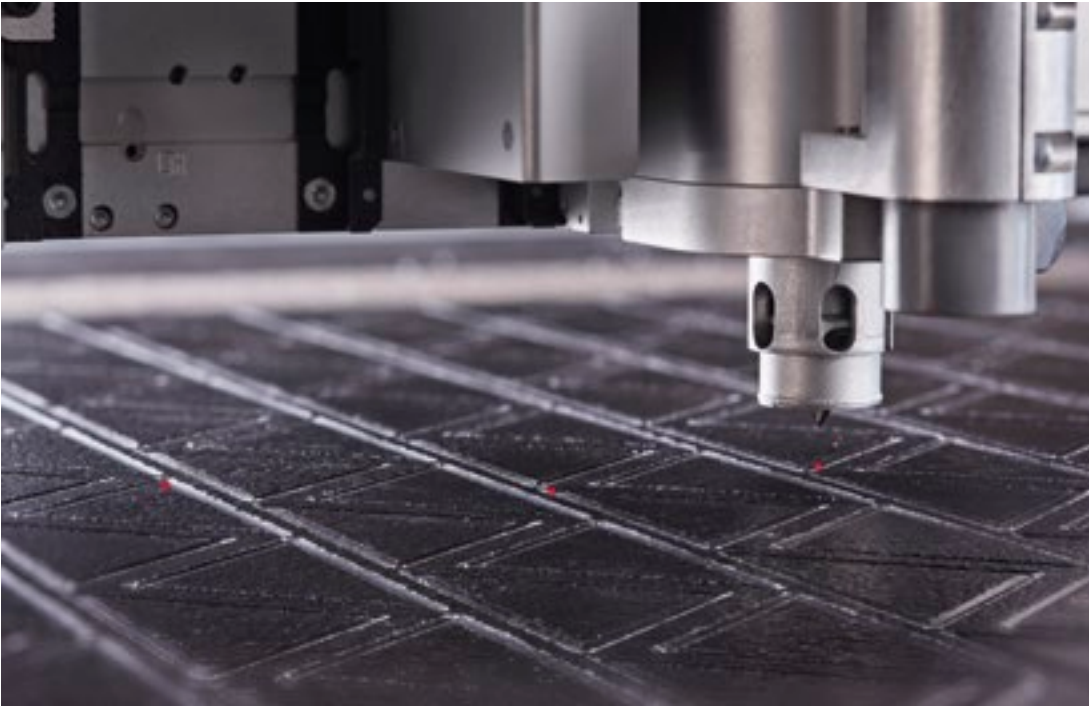

Our designers recreate your preferred image using top-of-the-line software to enable flawless reproduction.



If preferred, we also offer a number of pre-defined motifs where you can simply select the colors you want and we'll do the rest. For example, our Nexus and Star motifs are classic, eye-catching designs that look phenomenal in entryways and hallways.

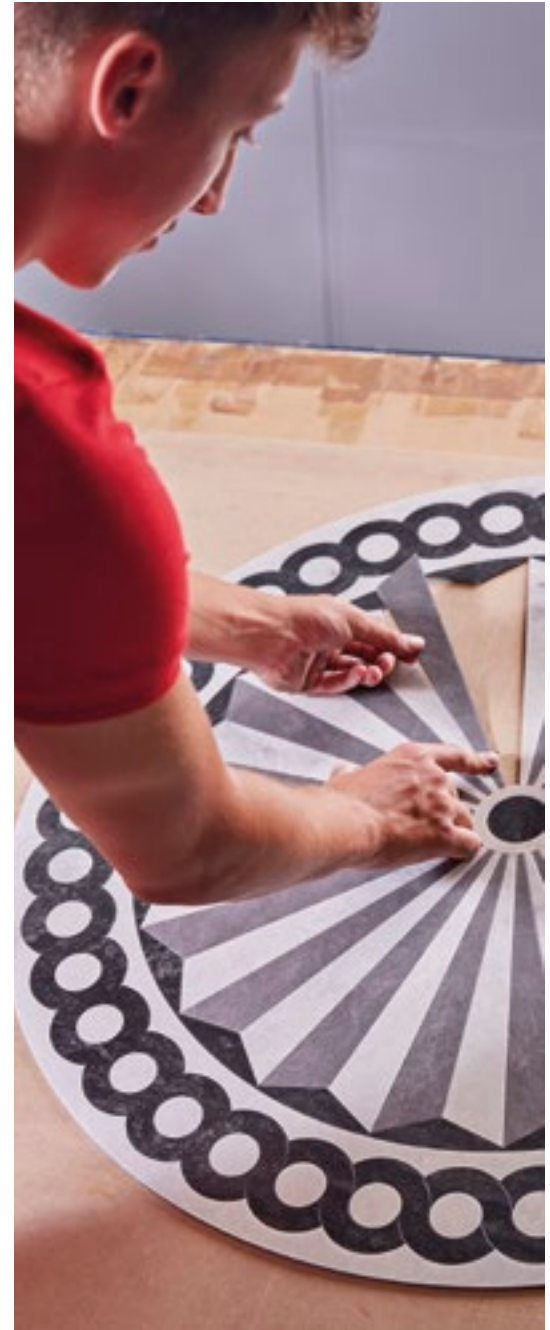

Star feature





■ Canberra LM06 with Nexus feature

KaleidSCOPE



Kaleidoscope is an innovative collection of six modular designs custom cut in compatible geometric formats. Utilizing our most popular colors from our standard product ranges, including woods, stones and new solids, Kaleidoscope shapes have complementary scale and angles*, designed to fit together, and offering you unparalleled flexibility.

Use one shape or combine shapes to create compelling spaces that push the boundaries of Designflooring.



Apex

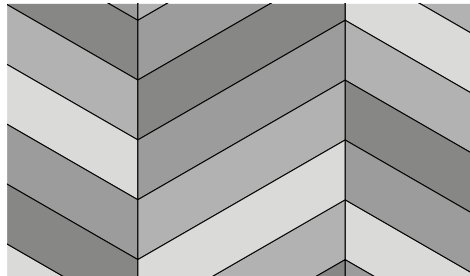



Cubix

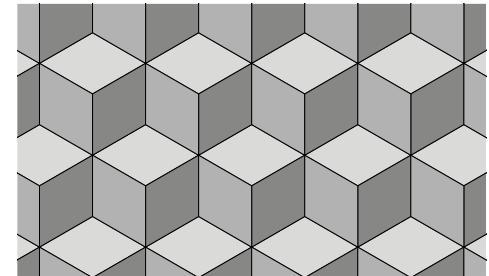



Hexa

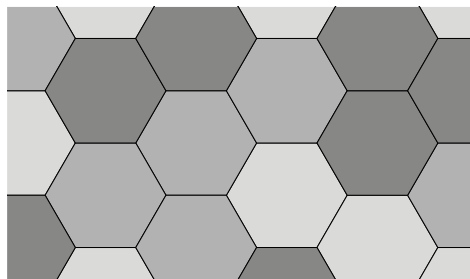



Pennon

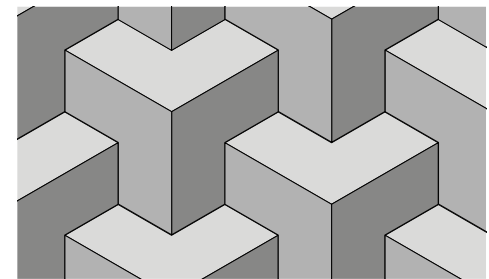



Half Pennon**

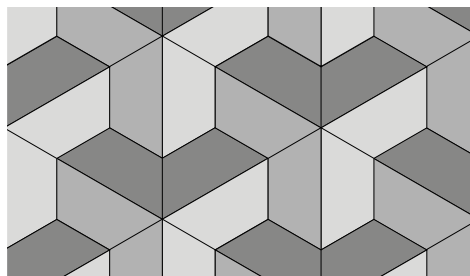

Pyramid

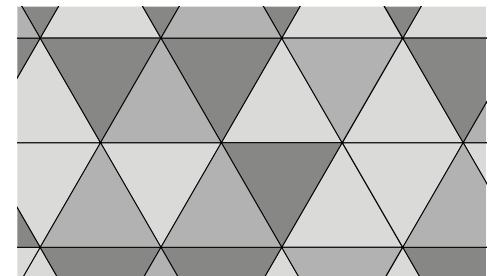

Tripoint


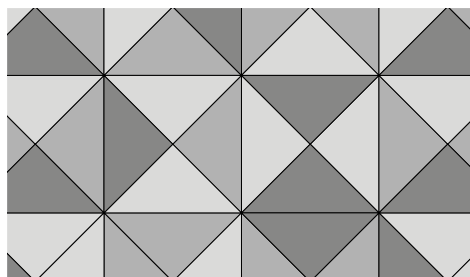



Note: pricing and lead times for these products varies. Contact your Commercial Business Manager for details.

* Excludes Tripoint.
** Available for wood designs.


hospitality design
awards



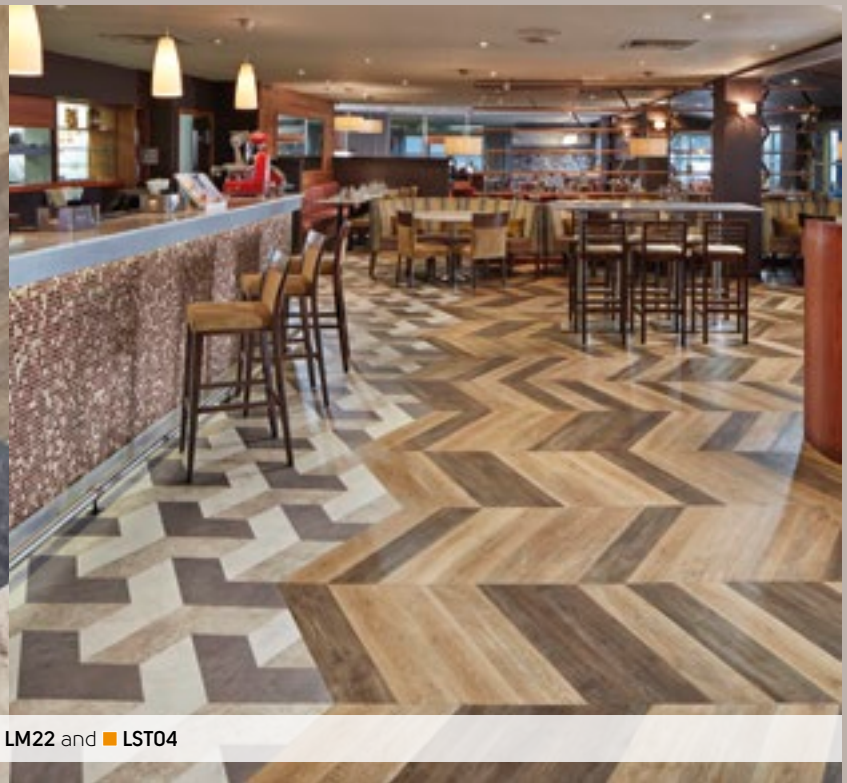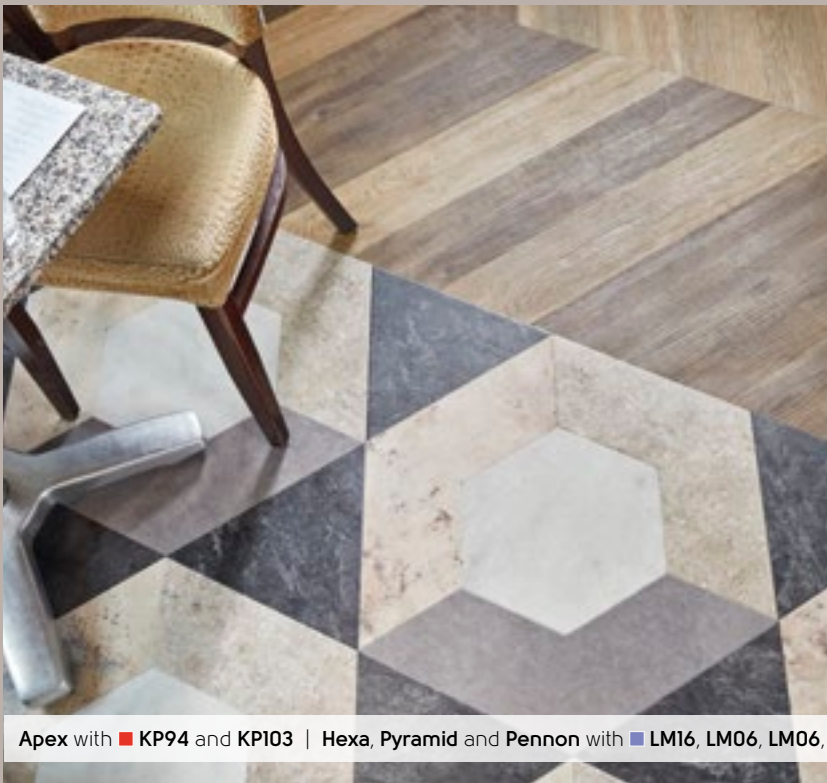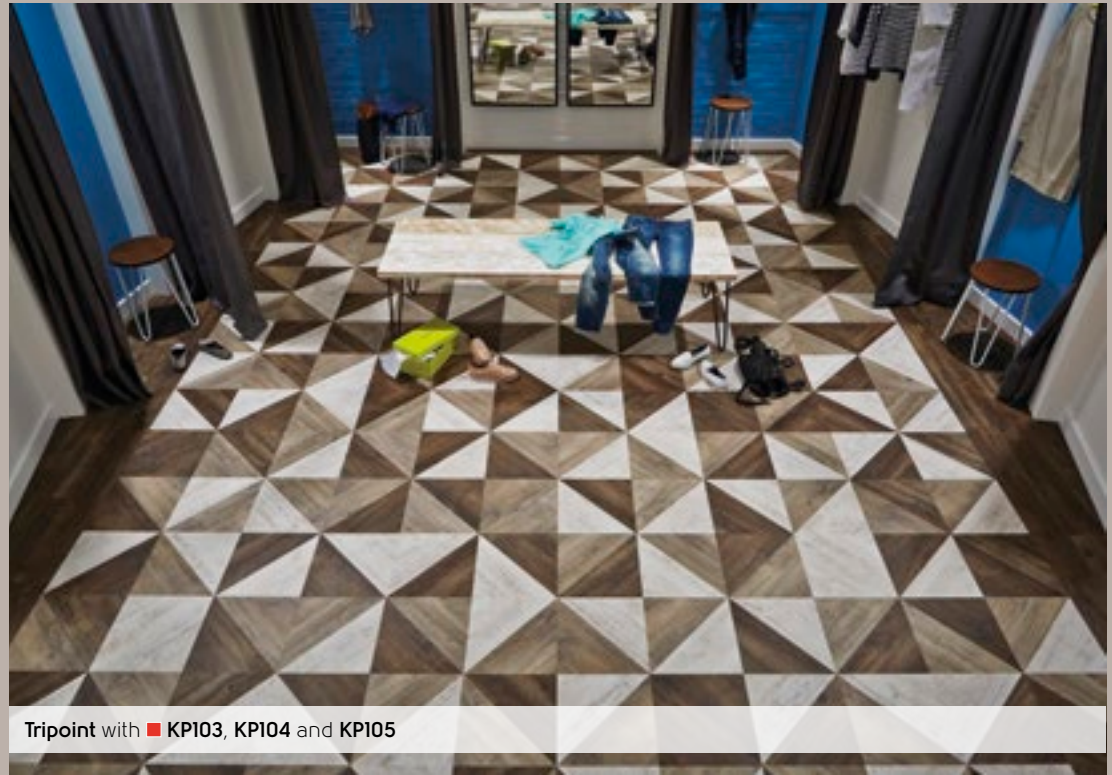


Solid colors


Inject bold color into your designs with our new solid colors. Use solid color to add balance to your geometric designs or to incorporate zoning and wayfinding.

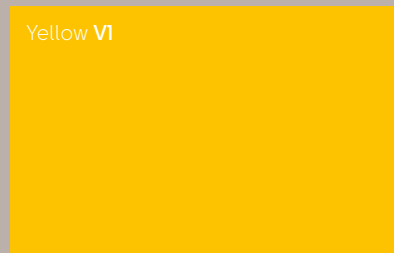


Thickness 3.0mm | Wear Layer 30 mil

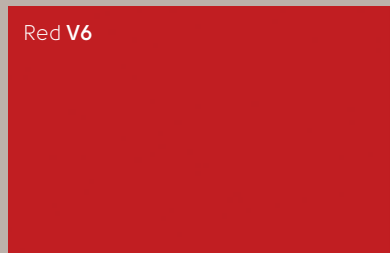


Thickness 3.0mm | Wear Layer 30 mil

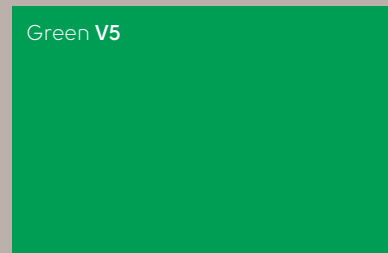


Thickness 3.0mm | Wear Layer 30 mil

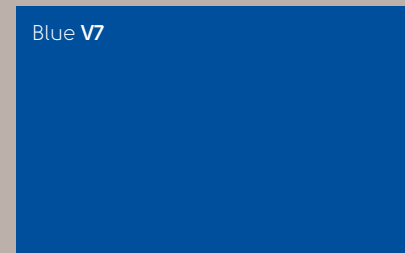


Thickness 3.0mm | Wear Layer 30 mil

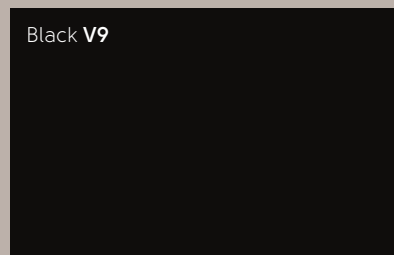


Thickness 3.0mm | Wear Layer 30 mil

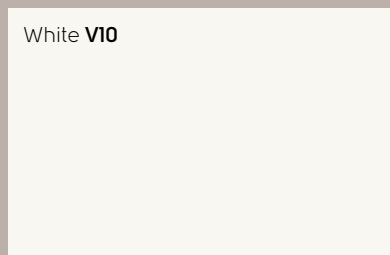


Thickness 3.0mm | Wear Layer 30 mil

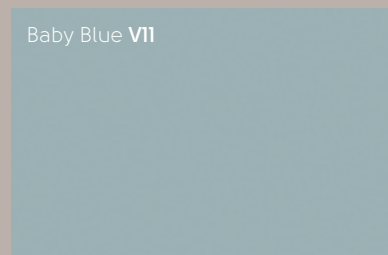


Thickness 2.5mm | Wear Layer 20 mil

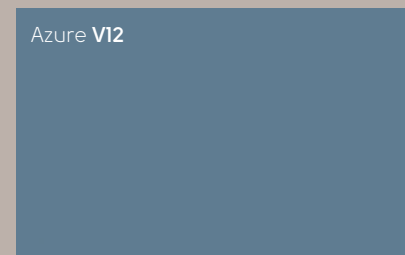


Thickness 2.5mm | Wear Layer 20 mil

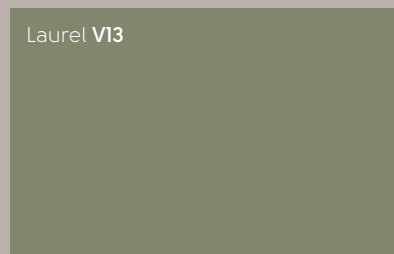

Thickness 2.5mm | Wear Layer 20 mil

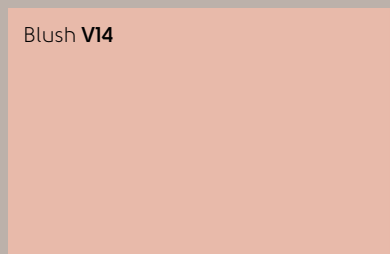


Thickness 2.5mm | Wear Layer 20 mil

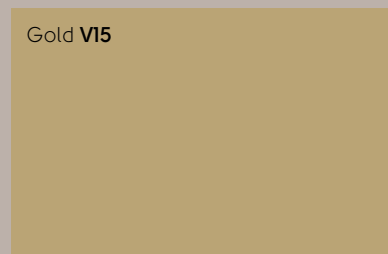


Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil

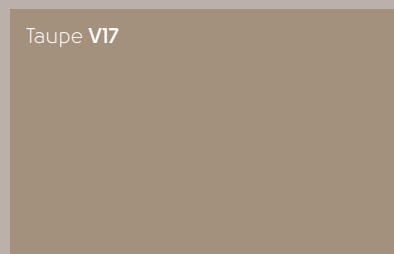


Thickness 2.5mm | Wear Layer 20 mil

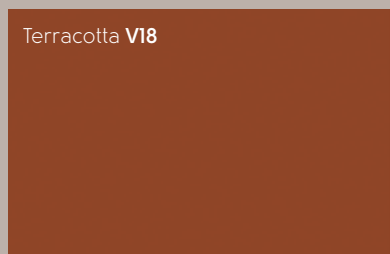

Thickness 2.5mm | Wear Layer 20 mil



Thickness 2.5mm | Wear Layer 20 mil

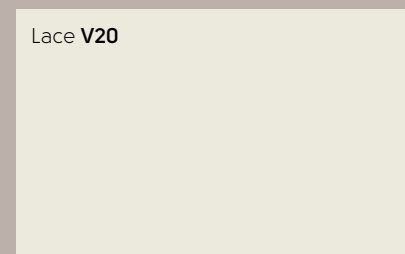

Thickness 2.5mm | Wear Layer 20 mil

Kaleid  **SCOPE**

Note: These products are only suitable for use with our Kaleidoscope range (see page: 252) and our custom cuts offering (see page: 250). As such, pricing and lead times for these products varies. Contact your Commercial Business Manager for details.



Design
components

■ American Oak RP11, Fresco Light Oak RP90, Natural Oak RP102 and custom White V10 planks



A top-down view of a wooden desk. In the upper left, a portion of a white keyboard is visible. Next to it are two black paper clips and a wooden-handled brush. In the upper right, an open notebook with lined pages is shown, with a silver pen resting on it. The desk surface is made of light-colored wood with a prominent grain pattern. A white rectangular border is drawn around the central part of the image, framing the text.

Loose lay



Health Centre ←




Information
Signage







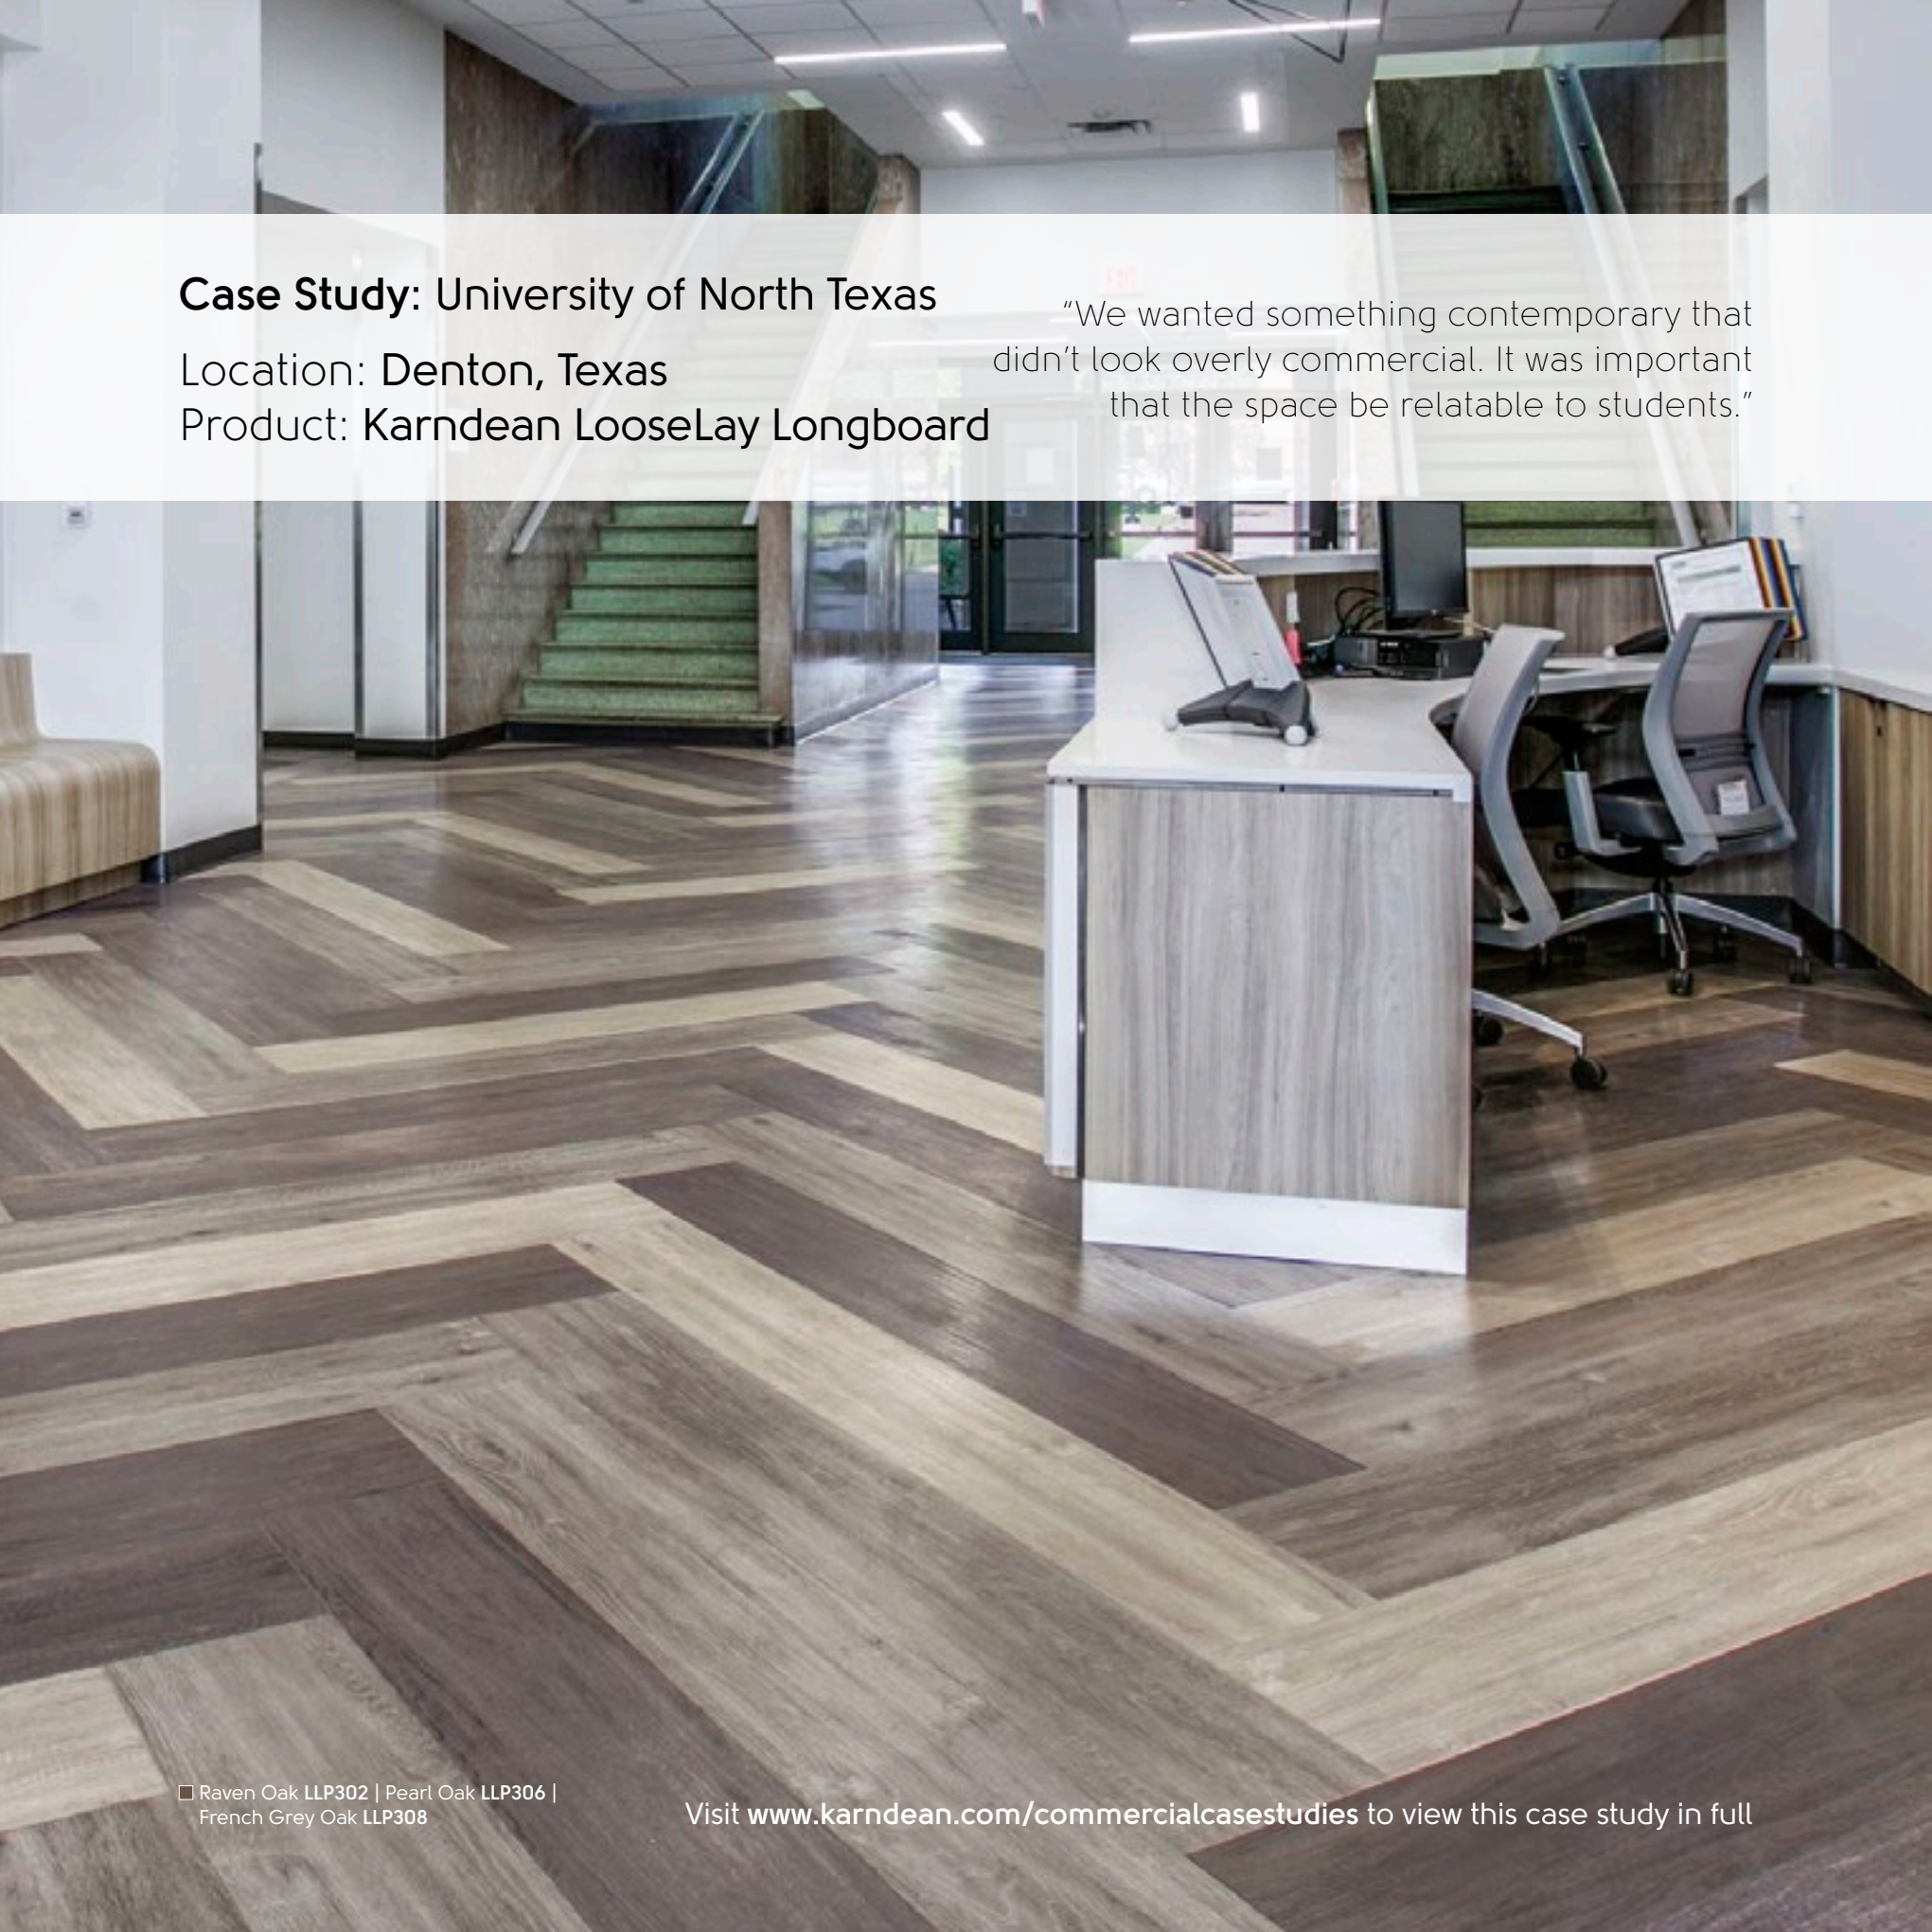


Case Study: University of North Texas

Location: Denton, Texas

Product: Karndean LooseLay Longboard

“We wanted something contemporary that didn’t look overly commercial. It was important that the space be relatable to students.”

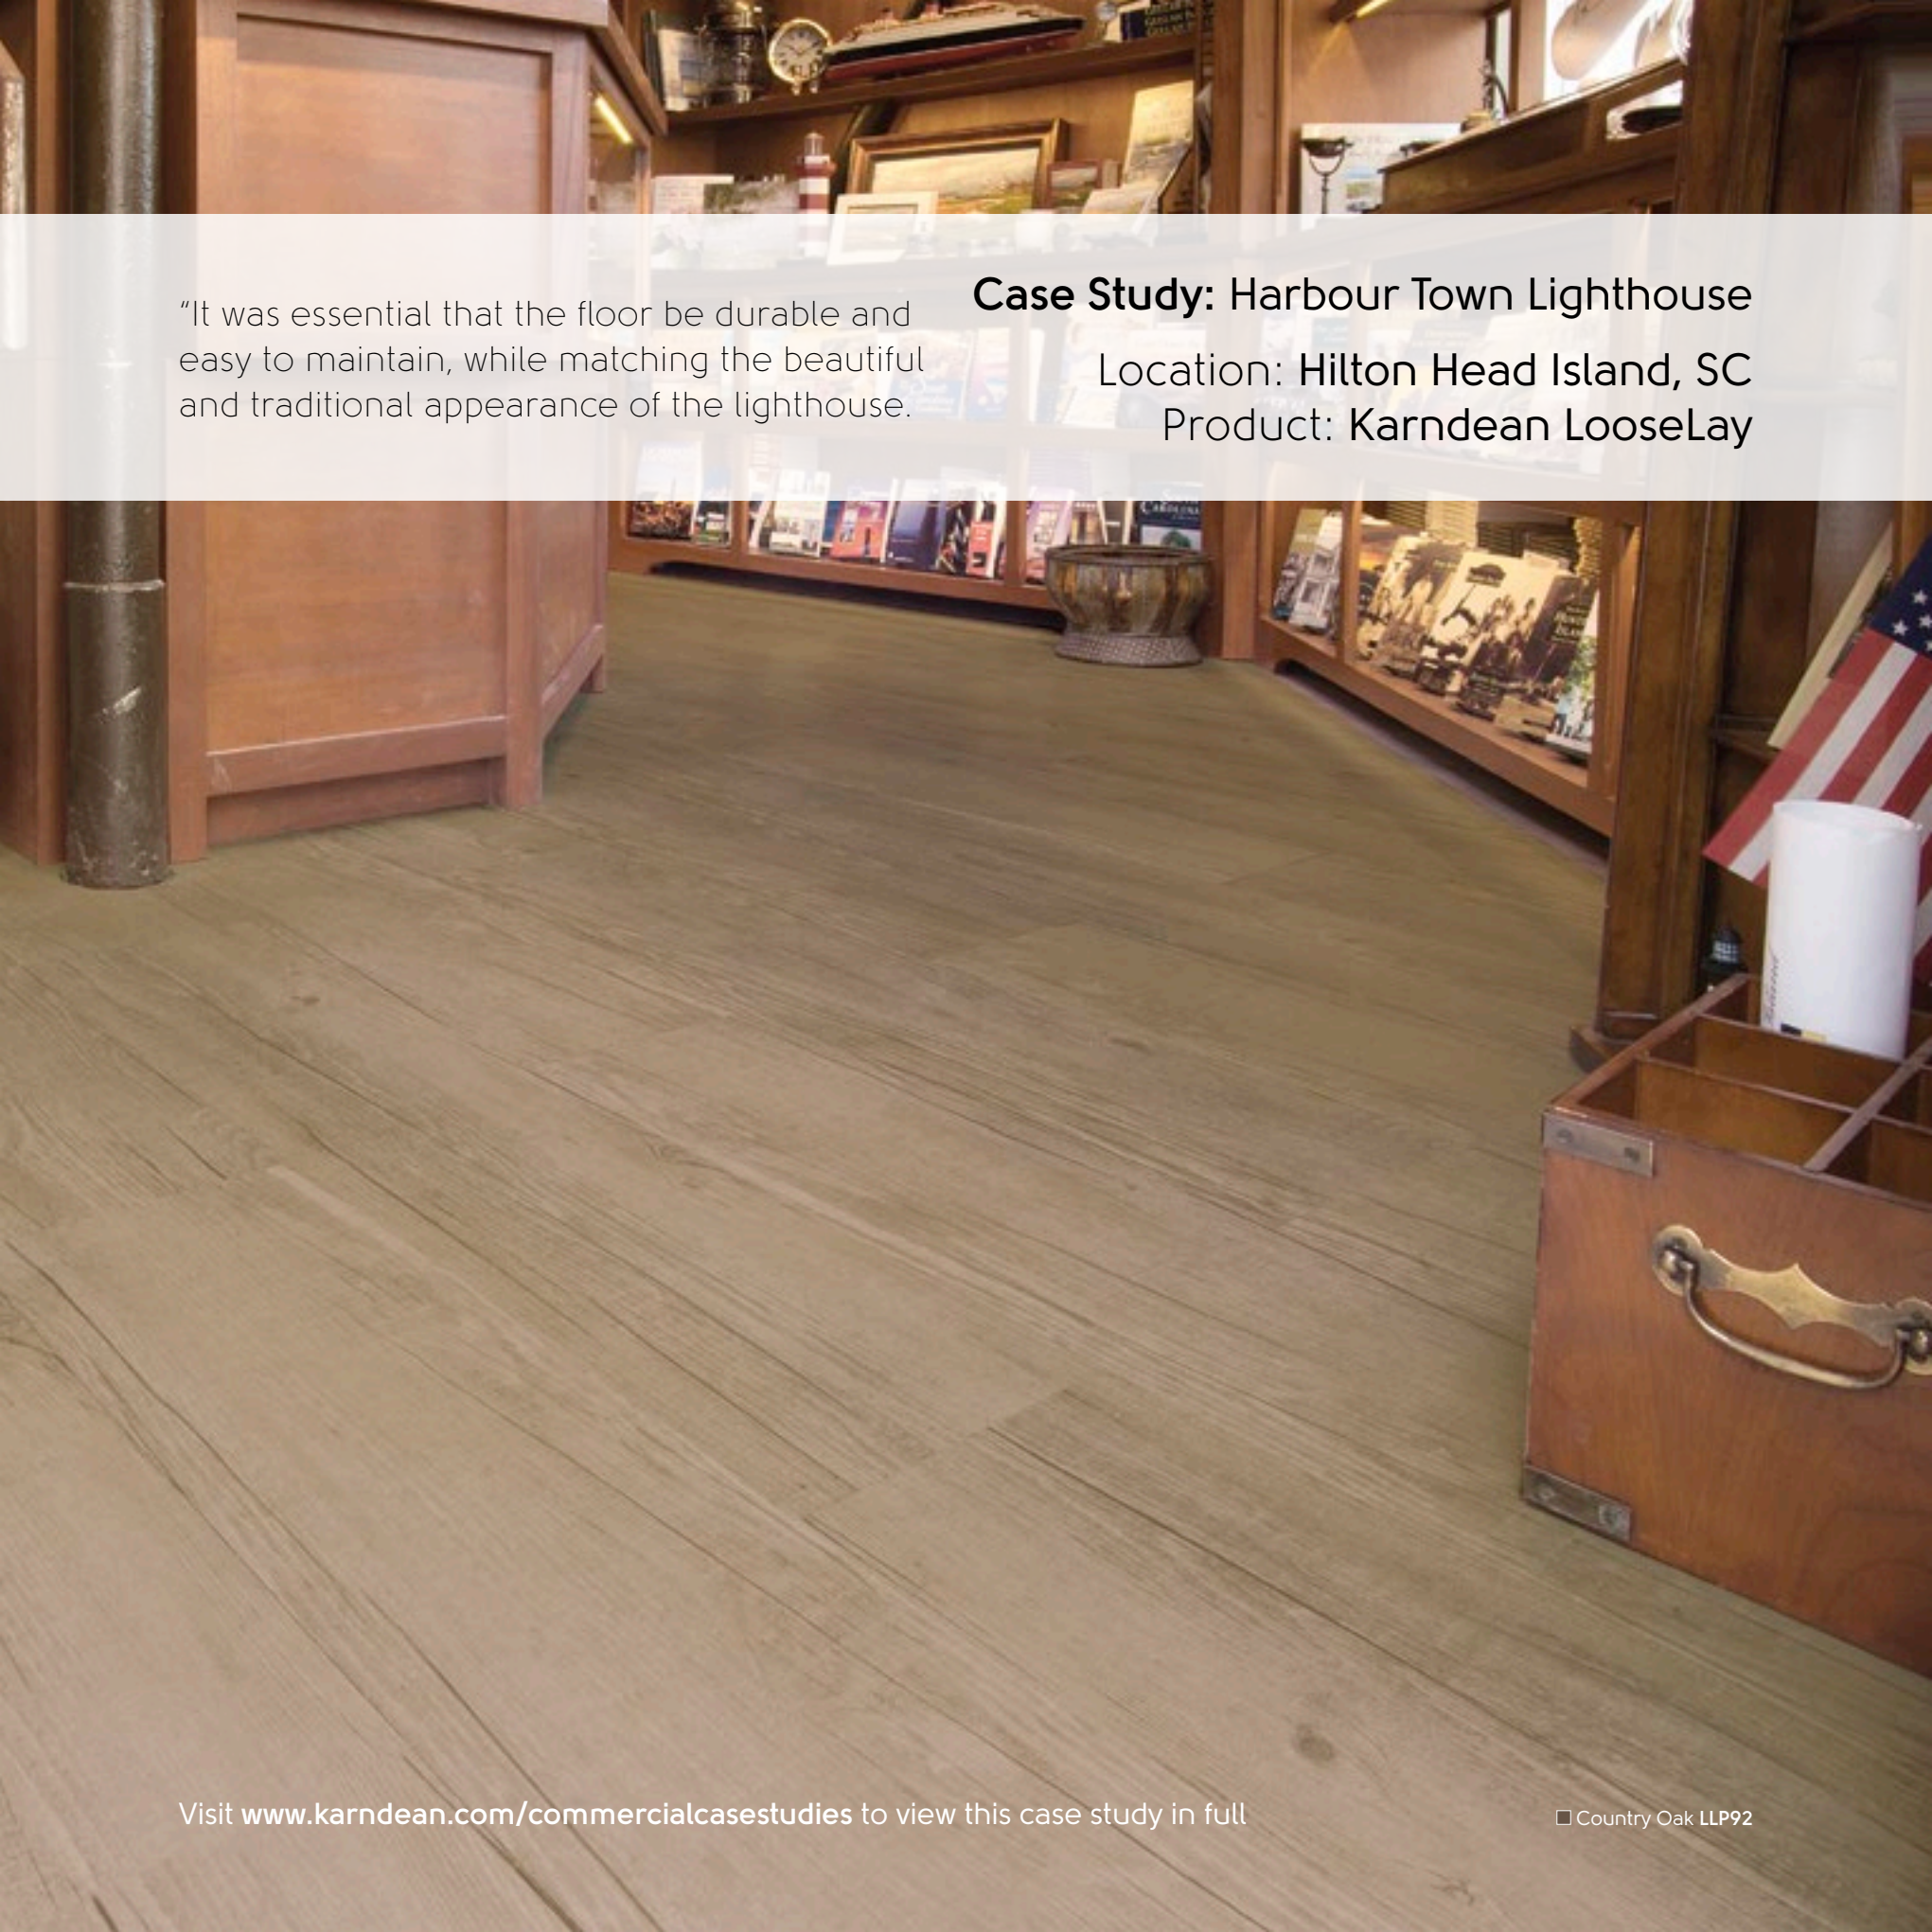The image shows the interior of the Harbour Town Lighthouse. The walls are covered in dark wood paneling. There are several wooden bookshelves filled with books and framed pictures. A large wooden chest with brass handles is in the foreground on the right. An American flag is visible in the background. The floor is made of light-colored wood planks.

"It was essential that the floor be durable and easy to maintain, while matching the beautiful and traditional appearance of the lighthouse.

Case Study: Harbour Town Lighthouse

Location: Hilton Head Island, SC

Product: Karndean LooseLay

Pattern guide

Create an eye-catching design with loose lay, which can incorporate multiple colors into one design. Karndean LooseLay's multi-directional planks and tiles allow for added pattern flexibility.



Wood layouts



Broken Chevron



Diagonal with border



Herringbone



Striped



Chevron



Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.


Stone layouts



Brick Lay




Diagonal

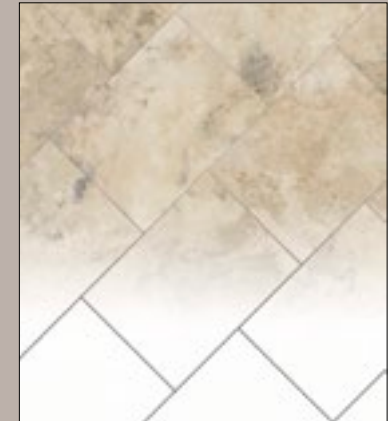

Herringbone



Striped

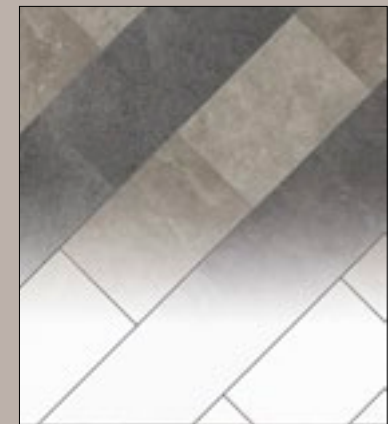

Mixed wood & stone layouts

Striped



Note: Do not cut Karndean LooseLay planks or tiles into pieces that are smaller than the width of the product, as this will affect the quality of the installation.














Wood at a glance (loose lay only)

Loose lay: ■ Karndean LooseLay | □ Karndean LooseLay Longboard



Stone at a glance (loose lay only)

Loose lay: ■ Karndean LooseLay

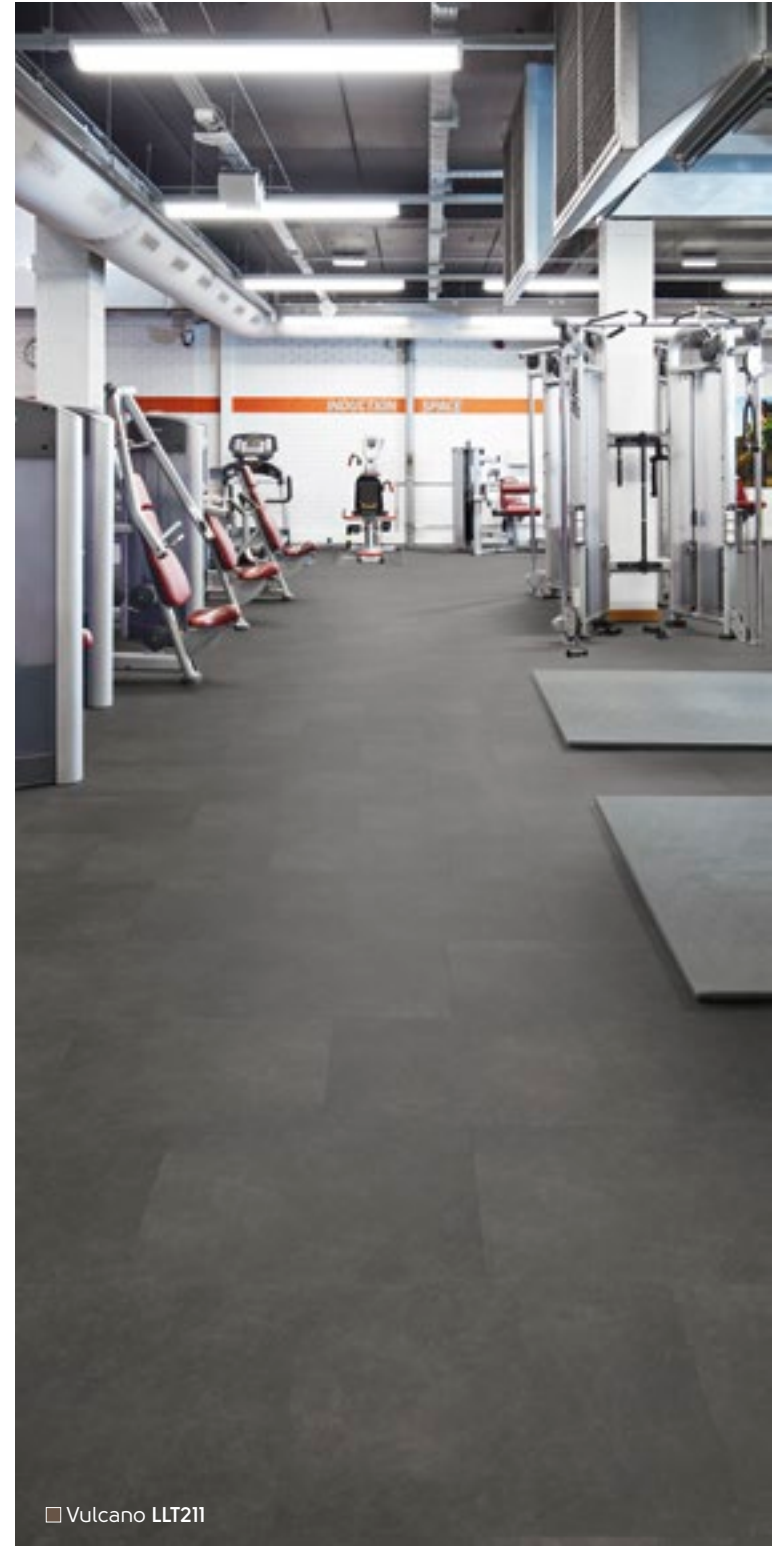

Technical overview (loose lay only)

	Standard	Karndean LooseLay Longboard (see page: 270)	Karndean LooseLay (see page: 290)
Thickness		4.5 mm	4.5 mm
Size		59.05" x 9.84" (1500 mm x 250 mm)	Various, see individual product pages
Box quantity		8 Planks/32.28 sq.ft.	Various, see individual product pages
Wear layer		20 mil (0.5 mm)	20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime	15 Years Lifetime
Beveled edge		No	No
Classification	ASTM F1700	Class III Type B	Class III Type B
Reaction to fire	ASTM E648-06	Class 1	Class 1
Smoke density	ASTM E662-06	Pass (<450)	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 1.7$	Pass $\Delta E = 1.7$
Abrasion resistance	ASTM D3884	113000 Cycles	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 16$ dB IIC = 56 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	$\Delta IIC = 16$ dB IIC = 56 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi	1000 psi
Flexibility	ASTM F137	Pass	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass	Pass
Indentation – residual	ASTM F1914	<0.003"	<0.003"
Adhesive		Please refer to our installation instructions.	Please refer to our installation instructions.
Recycling		Suitable	Suitable
Phthalate free		Yes	Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.



Karndean LooseLay Longboard

59" x 10" (1500mm x 250mm)*



Twilight Oak **LLP301**

Page 285



Raven Oak **LLP302**

Page 287



Antique Heart Pine **LLP303**

Page 289



Weathered Heart Pine **LLP304**

Page 275



Reclaimed Heart Pine **LLP305**

Page 283



Pearl Oak **LLP306**

Page 273



Neutral Oak **LLP307**

Page 282



French Grey Oak **LLP308**

Page 278



Taupe Oak **LLP309**

Page 280



Champagne Oak **LLP310**

Page 274



Character Walnut **LLP315**

Page 288




Lemon Spotted Gum **LLP317**

Page 276



Worn Fabric Oak **LLP330**

Page 279



Shadow Fabric Oak **LLP331**

Page 277



Urban Fabric Oak **LLP332**

Page 284



Vanilla Oak **LLP333**

Page 272



Weathered American Pine **LLP335**

Page 281



Distressed American Pine **LLP336**

Page 286

* Actual product size: 59.05" x 9.84"

Karndean LooseLay Longboard

Karndean
LooseLay
Longboard

LOOSE LAY

LooseLay
Longboard

A preferred alternative to carpet tiles and other floating floors, Karndean Designflooring's innovative LooseLay products give you the intricate design and durability you expect from a Karndean floor, but in a unique format that can be installed quickly and easily in nearly any space. Featuring enhanced acoustic properties, an IIC rating of 56 and excellent environmental credentials, LooseLay Longboard is the perfect choice for a variety of installations. Its 59" length facilitates even faster installation times than standard Karndean LooseLay. LooseLay Longboard can be laid over most existing hard floors and does not require a full-spread adhesive in most applications. What's more, it can be installed on subfloors with an RH of up to 95%.



□ Character Walnut LLP315

	Standard	Result
Thickness		4.5 mm
Size		59.05" x 9.84" (1500 mm x 250 mm)
Box quantity		8 Planks/32.28 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass ΔE = 1.7
Abrasion resistance	ASTM D3884	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 16 dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes


* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Vanilla Oak LLP333



Karndean
Designflooring

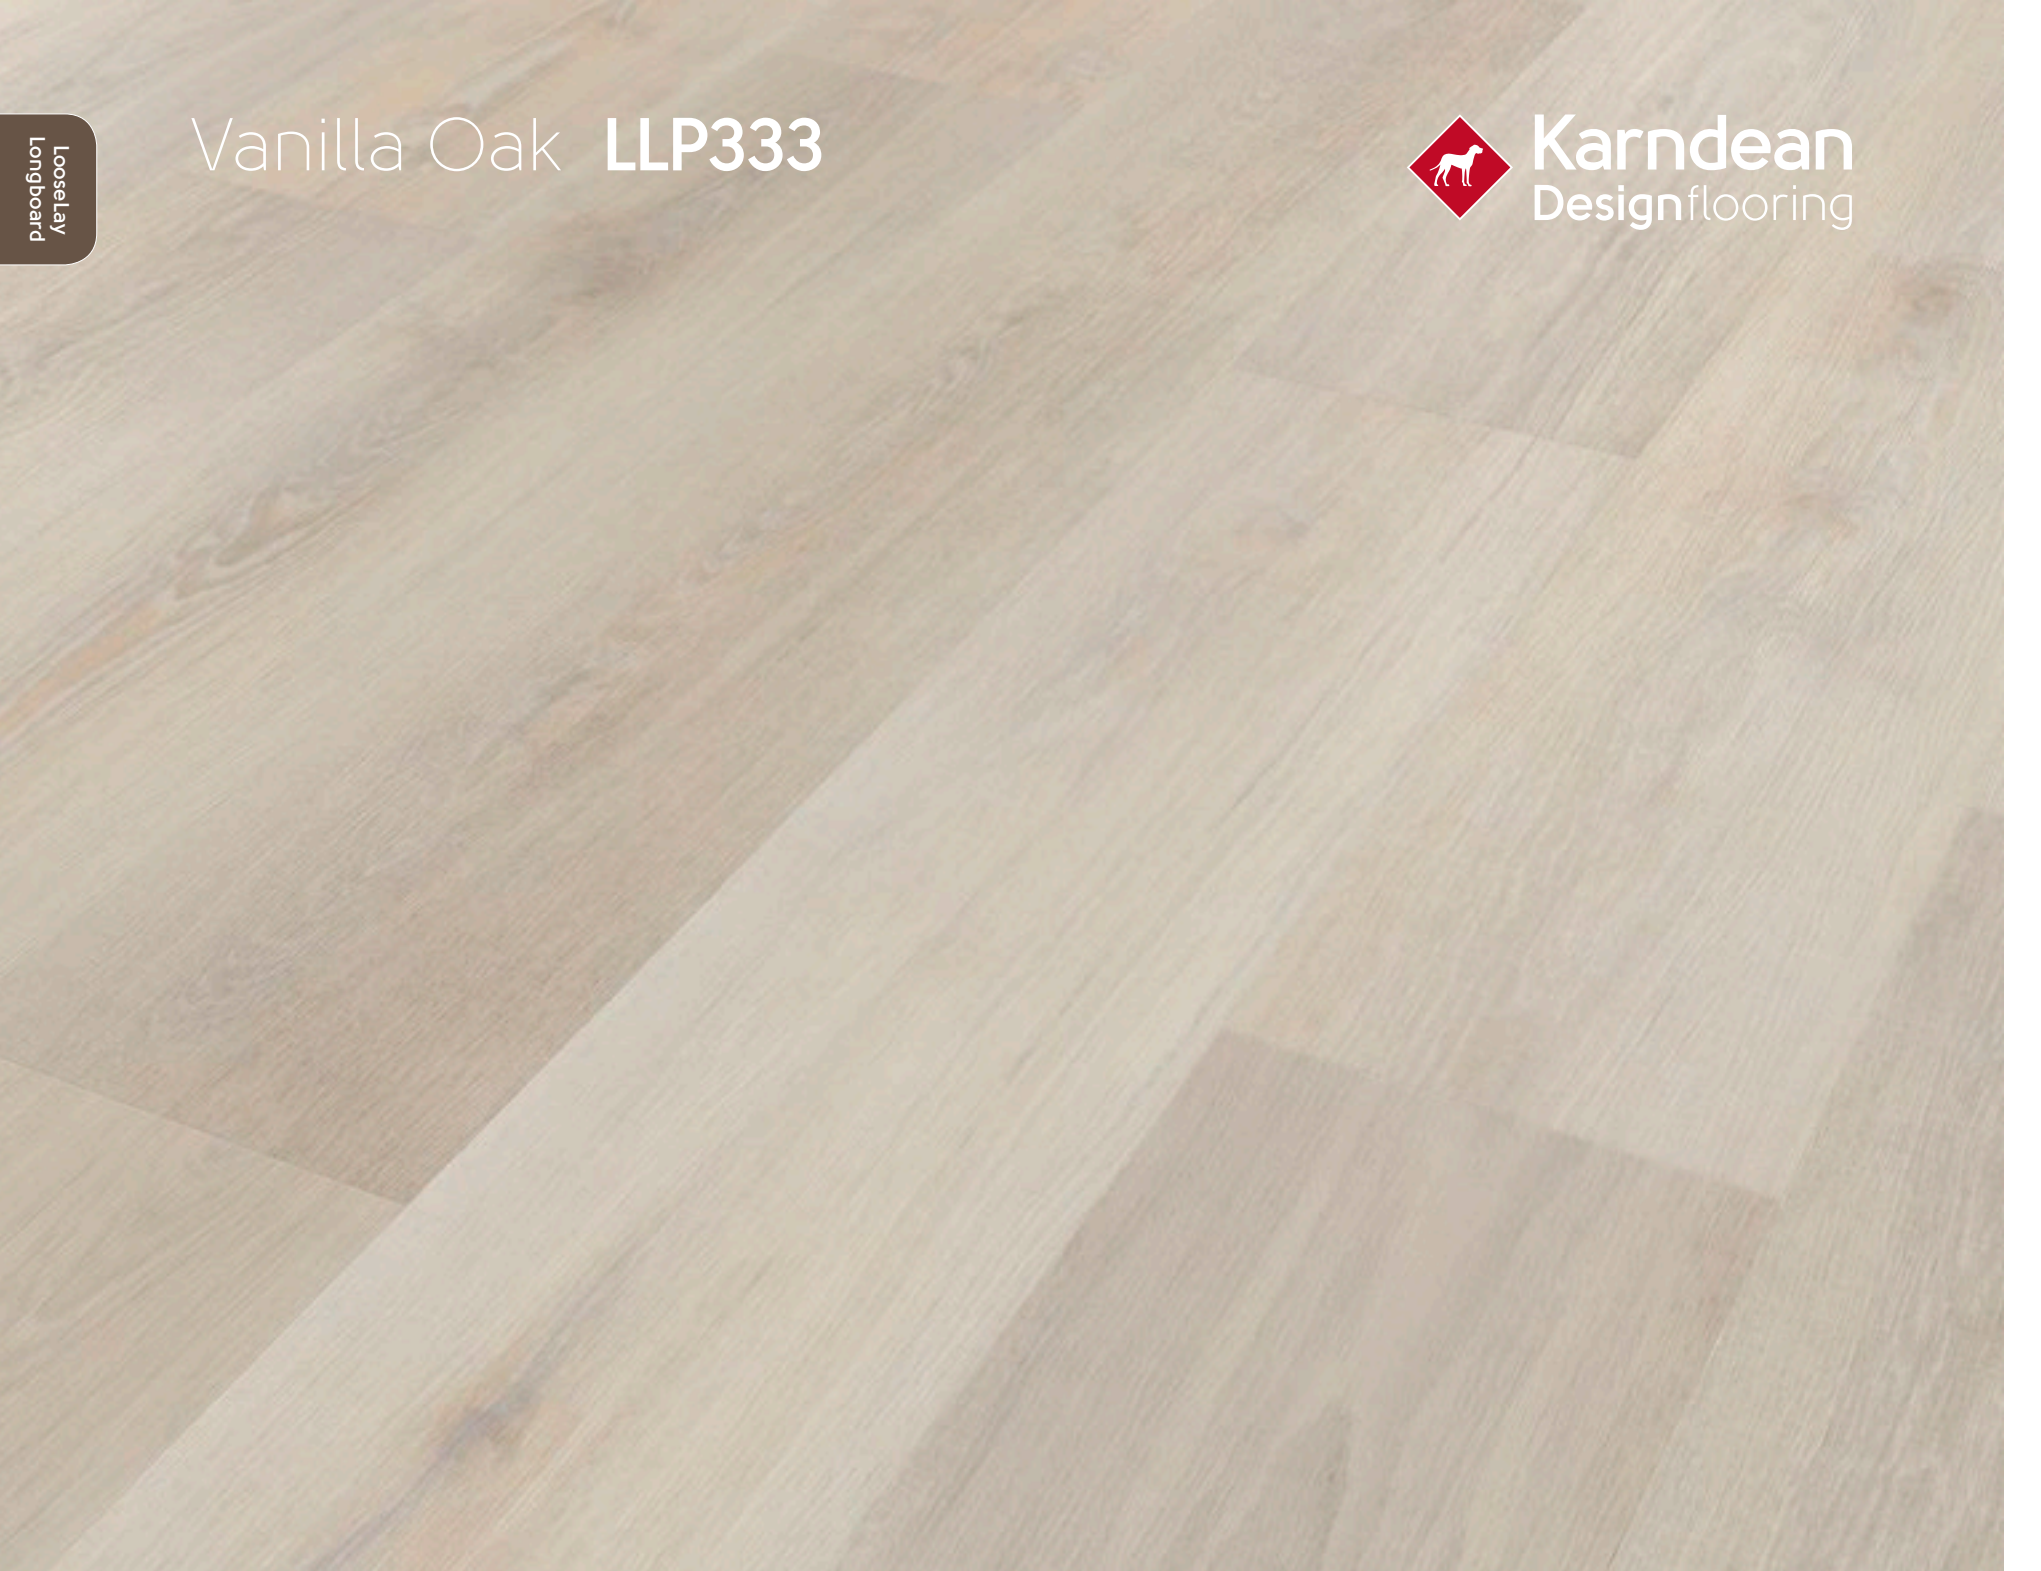

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP333
to 877-850-0376

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Pearl Oak LLP306



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271


TEXT
LLP306
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Champagne Oak LLP310



Karndean
Designflooring

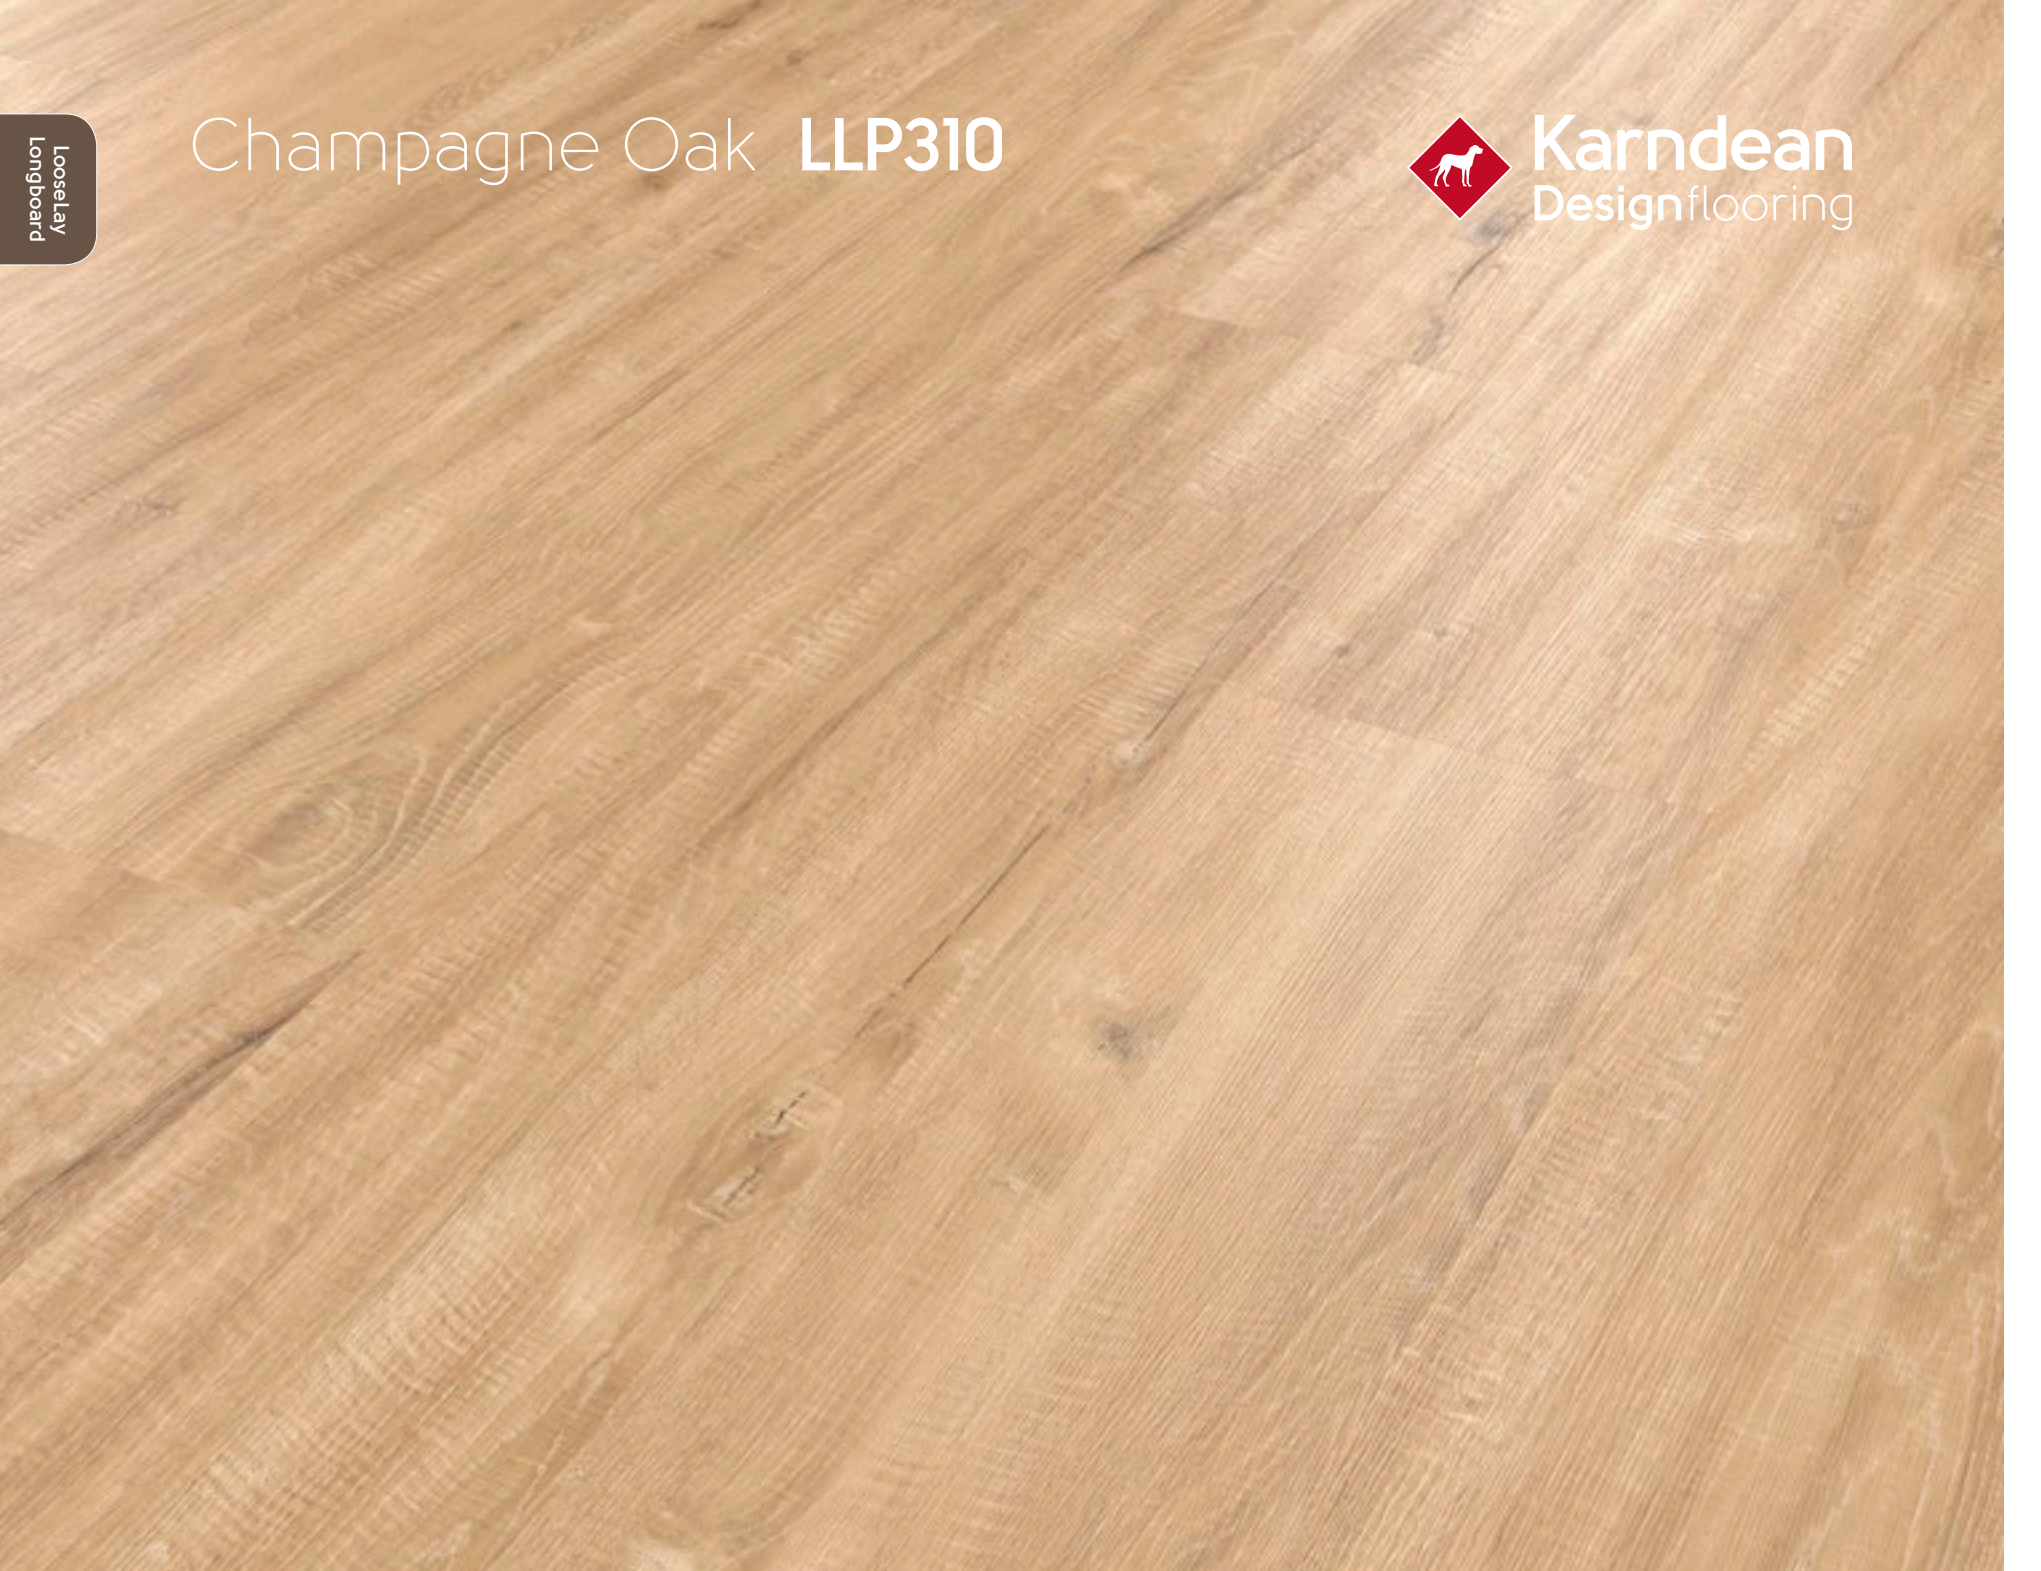

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP310
to 877-850-0376

for technical data, installation instructions, to order a sample or for more information.
Standard data & messaging rates apply.

Weathered Heart Pine LLP304



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP304
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lemon Spotted Gum LLP317



Karndean
Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP317
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Shadow Fabric Oak LLP331



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP331
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

French Grey Oak LLP308



Karndean
Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP308
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Worn Fabric Oak LLP330



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP330
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Taupe Oak LLP309



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 271

TEXT
LLP309
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Weathered American Pine LLP335



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP335
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Neutral Oak LLP307



Karndean
Designflooring



Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP307
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed Heart Pine LLP305



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP305
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Urban Fabric Oak **LLP332**
Karndean
Designflooring

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP332
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Twilight Oak LLP301



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP301
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Distressed American Pine LLP336



Karndean
Designflooring

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry 0.92)

Technical Specifications:
Page: 271

TEXT
LLP336
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Raven Oak LLP302



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271


TEXT
LLP302
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Character Walnut LLP315



Karndean
Designflooring

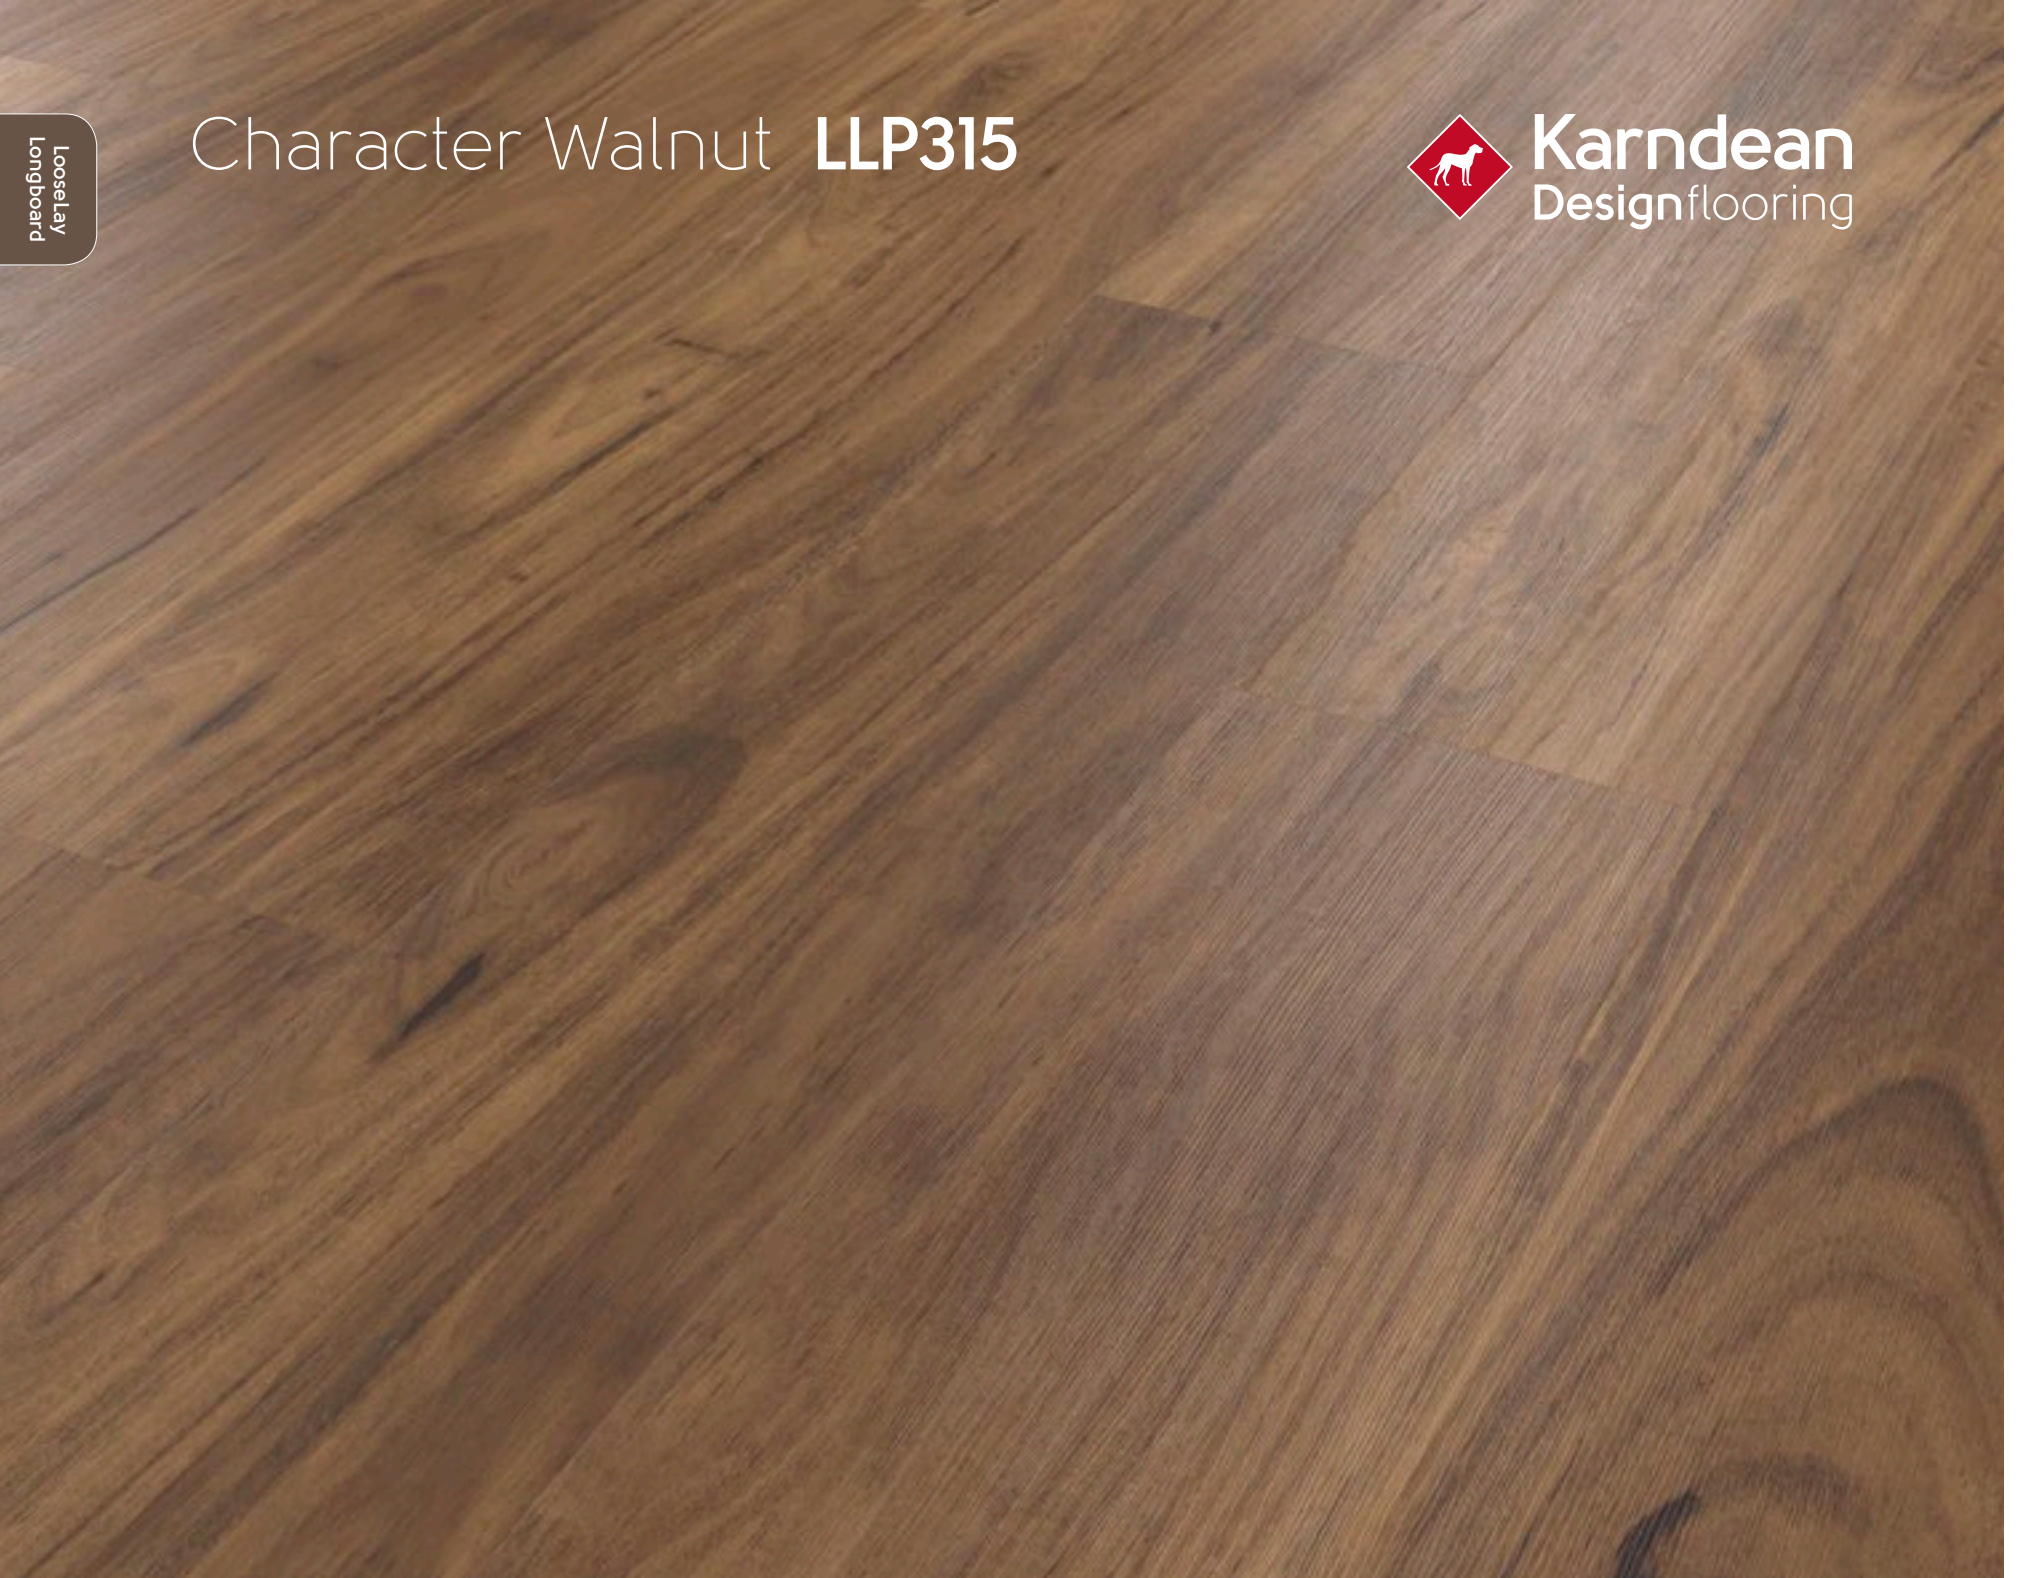

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP315
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Antique Heart Pine LLP303



Karndean
Designflooring

LooseLay
Longboard

Size	59" x 10" (1500mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	8 Planks/32.28 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 271

TEXT
LLP303
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Karndean LooseLay Wood

41" x 10" (1050mm x 250mm)*



Burnt Ginger **LLP5-7**



Newport **LLP94**



Hartford **LLP112**



Copper Gum **LLP33**



Ashland **LLP95**



Cambridge **LLP113**



Tasmanian Wattle **LLP38**



Providence **LLP108**



Antique Karri **LLP39**



Stamford **LLP109**



Merbau **LLP91**



Burlington **LLP110**



Country Oak **LLP92**



Boston **LLP111**

* Actual product size: 41.33" x 9.84"

Karndean LooseLay Wood

Karndean
LooseLay

LOOSE LAY

Karndean LooseLay is an innovative format of luxury vinyl flooring featuring a friction grip backing that holds the product in place without the need for clicking or locking. It's easy to install, boasts enhanced acoustic properties and is 100% recyclable. In some spaces we do recommend the use of a tackifier. Please see our website for details. The collection includes 18 wood look planks available in a wide range of designs and tones. From the light rustic tones of Country Oak through to the rich brown tones of Dover, our LooseLay Wood collection offers something to suit any space.

LooseLay
Wood



□ Stamford LLP109

	Standard	Result
Thickness		4.5 mm
Size		41.33" x 9.84" (1050 mm x 250 mm)
Box quantity		12 Planks/33.89 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass $\Delta E = 1.7$
Abrasion resistance	ASTM D3884	113000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	$\Delta IIC = 16$ dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Ashland LLP95



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP95
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Cambridge LLP113



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP113
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Providence LLP108



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP108
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Country Oak LLP92



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP92
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Newport LLP94



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP94
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Tasmanian Wattle LLP38



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP38
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Antique Karri LLP39



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP39
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Stamford LLP109



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP109
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burnt Ginger LLP5-7



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP5-7
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Copper Gum LLP33



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP33
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Burlington LLP110



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP110
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Merbau LLP91



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP91
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Hartford LLP112



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP112
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Boston **LLP111**



Karndean
Designflooring

LooseLay
Wood

Size	41" x 10" (1050mm x 250mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	12 Planks/33.89 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 291

TEXT
LLP111
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Karndean LooseLay Stone

19.7" x 24" (500mm x 610mm)*

LooseLay
Stone




Colorado **LLT201**

Page: 313



Indiana **LLT202**

Page: 310

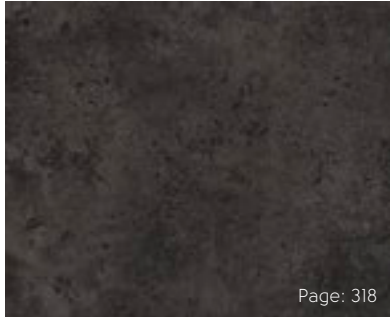


Montana **LLT203**

Page: 318




Georgia **LLT206****

Page: 315

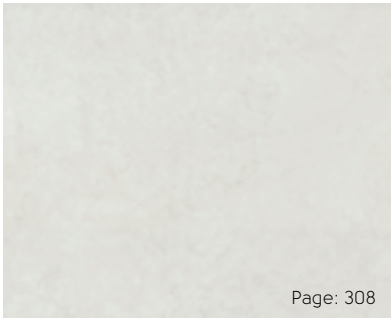


Tino **LLT208**

Page: 308

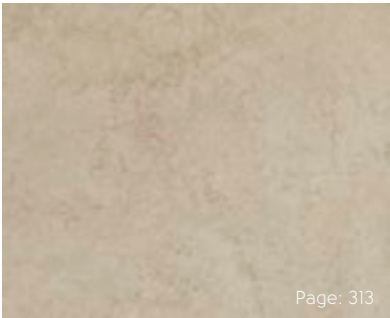


Capri **LLT209**

Page: 313

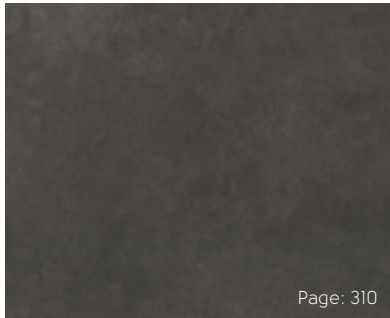


Vulcano **LLT211**

Page: 310

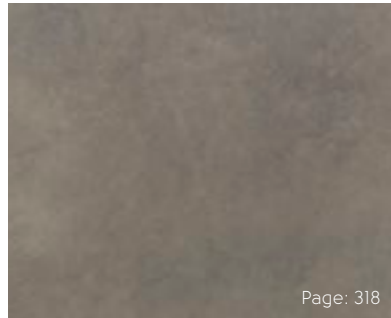

Dakota **LLT212**

Page: 318

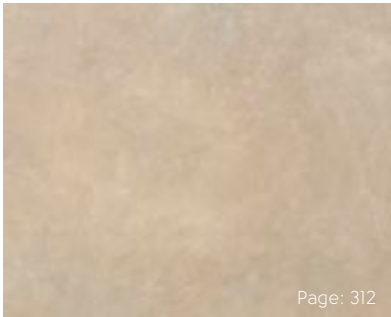


Maine **LLT213**

Page: 312




Seattle **LLT214**

Page: 309

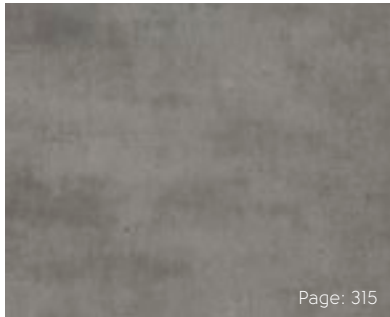

Vermont **LLT217**

Page: 315

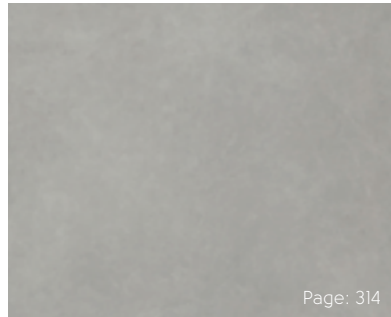

Ontario **LLT218**

Page: 314

* Actual product size: 19.68" x 24.01"

**Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

Karndean LooseLay Stone

Karndean
LooseLay

LOOSE LAY

Karndean LooseLay is an innovative format of luxury vinyl flooring featuring a friction grip backing that holds the product in place without the need for clicking or locking. It's easy to install, boasts enhanced acoustic properties and is 100% recyclable. In some spaces we do recommend the use of a tackifier. Please see our website for details. The collections features twelve distinctive visuals, including designs that replicate the striking look of natural slate, poured concrete and travertine, while our textiles feature a linear pattern for a distinct modern look.



■ Colorado LLT201 | Montana LLT203

	Standard	Result
Thickness		4.5 mm
Size		19.68" x 24.01" (500 mm x 610 mm)
Box quantity		10 Tiles/32.8 sq.ft.
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty*	Commercial Residential	15 Years Lifetime
Beveled edge		No
Classification	ASTM F1700	Class III Type B
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	FF 1-70; Federal Approval	Pass
Slip resistance**	ASTM D2047	Pass (Dry 0.92)
Staining resistance	ASTM F925	Pass
Light fastness	ASTM F1515	Pass ΔE = 1.7
Abrasion resistance	ASTM D3884	113,000 Cycles
Dimensional stability	ASTM F2199	Pass 0.0045"/lin.ft
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 16 dB IIC = 56 (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + Quiet choice)
Static load	ASTM F970	1000 psi
Flexibility	ASTM F137	Pass
Electrical behavior body voltage	AATCC 134-1996	Pass
Indentation – residual	ASTM F1914	<0.003"
Adhesive	Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Subject to terms, see page: 447.

** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

LooseLay
Stone

Tino LLT208



LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT208
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Seattle LLT214



LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT214
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Indiana LLT202



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT202
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Capri LLT209



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT209
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Maine LLT213



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT213
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Colorado LLT201



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT201
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ontario LLT218



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT218
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Georgia LLT206



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT206
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Vermont LLT217



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT217
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Dakota LLT212



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT212
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Montana LLT203



LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT203
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Vulcano LLT211



Karndean
Designflooring

LooseLay
Stone

Size	19.7" x 24" (500mm x 610mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	No
Box Quantity	10 Tiles/32.8 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.92)

Technical Specifications:

Page: 307

TEXT
LLT211
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.





Rigid core
























































Wood at a glance (rigid core only)

Rigid core: ■ Korlok | ■ Van Gogh | ■ Knight Tile







■ SCB-KP140 pg: 408




■ RCP6541 pg: 375




■ RKP8114 pg: 359




■ RKP8209 pg: 360




■ SCB91 pg: 398




■ RKP8126 pg: 355



■ SCB-KP141 pg: 409




■ SCB51 pg: 396




■ SM-RKP8209 pg: 361




■ SCB-KP98 pg: 411




■ SCB99 pg: 393




■ RKP8102 pg: 362




■ RKP8110 pg: 358




■ RCP6539 pg: 377




■ SCB89 pg: 399




■ RKP8107 pg: 351




■ RKP8124 pg: 356




■ RCP6543 pg: 373




■ SCB-KP96 pg: 410




■ RCP6545 pg: 372




■ SCB70 pg: 394




■ SCB-KP97 pg: 407




■ SCB76 pg: 384




■ SCB41 pg: 395



■ RKP8238 pg: 353



■ RKP8122 pg: 357



■ SCB54 pg: 397

Pattern guide

Create an eye-catching design with rigid core, which can incorporate multiple colors into one design.

Herringbone*



Staggered



Striped



















Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these designs into a future project.

*Only products denoted with SM- prefix may be laid in herringbone pattern.

Stone at a glance (rigid core only)

Rigid core: ■ Korlok | ■ Knight Tile



Pattern guide


Create an eye-catching design with rigid core, which can incorporate multiple colors into one design.

Bring your pattern ideas to life using our Floorstyle floor designer or contact your Commercial Business Manager for more information on incorporating these layouts into a future project.


Brick Lay



Striped Diagonal

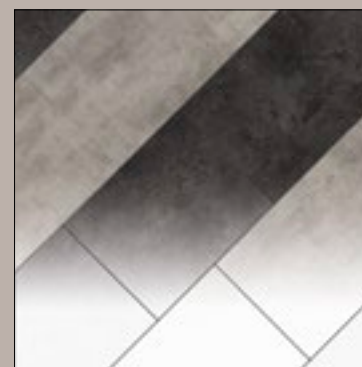

Herringbone*

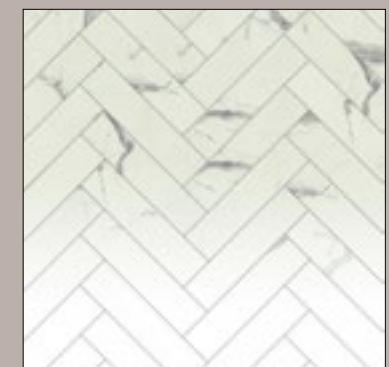

*Only products denoted with SM- prefix may be laid in herringbone pattern.



Technical overview (rigid core only)

	Standard	Korlok Select (see page 334)	Korlok Reserve (see page 364)	Van Gogh (see page 379)
Thickness		6.5 mm	6.5 mm	4.5 mm
Size		Various, see individual product pages	48.03" x 7.05" (1220 mm x 179 mm)	48.03" x 7.09" (1219 mm x 178 mm)
Box quantity		Various, see individual product pages	10 Planks/23.51 sq.ft.	10 Planks/23.64 sq.ft.
Locking system		5G® short edge; 2G™ long edge*§	2G™ angling installation§	Click-locking**
Wear layer		20 mil (0.5 mm)	20 mil (0.5 mm)	20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating	K-Guard+® PU coating	K-Guard+® PU coating
Warranty***	Commercial Residential	15 Years Lifetime	15 Years Lifetime	15 Years Lifetime
Beveled edge		Micro	Micro	Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core	Pass; Resilient flooring with Rigid Polymeric Core	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1	Class 1	Class 1
Flammability	ASTM D2859	Pass	Pass	Pass
Slip resistance†	ASTM D2047	Pass (Dry >0.8)	Pass (Dry >0.8)	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass (No change)	Pass (No change)	Pass
Smoke density	ASTM E662-06	–	–	Pass (<450)
Heat fastness	ASTM F1514	Pass	–	Pass
Light fastness	ASTM F1515	Pass	Pass	Pass
Electrostatic propensity	AATCC 134	1.6 kV	-1.4 kV	1.1 kV
Abrasion resistance	ASTM D4060	Pass 36000 Cycles	Pass 20000 Cycles	Pass 20000 Cycles
Dimensional stability	ASTM F2199	Pass (-0.003"/lin.ft)	Pass (width -0.003"/lin.ft) Pass (length -0.003"/lin.ft)	Pass
Static load	ASTM F970	Pass 800 psi at 0.005"	Pass 250 psi	Pass 600 psi at 0.005"
Small ball impact	NALFA 3.6	Pass class 4	Pass class 4	–
Large ball impact	NALFA 3.5	Pass class 4	Pass class 4	–
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 72 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 21 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)	ΔIIC = 22 dB IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Indentation - residual	ASTM F 1914	Pass (2.3%)	Pass	Pass
Thickness swell	NALFA 3.2	Pass class 4	Pass class 4	–
Chair resistance	NALFA 3.9	Pass class 4	Pass class 4	–
Surface bond	NALFA 3.10	Pass class 4	Pass class 4	–
Adhesive		None required; Please refer to our installation instructions.	None required; Please refer to our installation instructions.	None required; Please refer to our installation instructions.
Recycling		Suitable	Suitable	Suitable
Phthalate free		Yes	Yes	Yes

* 5G® short edge; 2G™ long edge except SM-RKP8105, SM-RKP8116 and SM-RKP8209 which are modified 2G™ on short edge and standard 2G™ long edge.

** Produced under Licence from Flooring Industries.

*** Subject to terms, see page 447.

† Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

§ 5G® and 2G™ are patented technologies invented by Välinge Innovation AB. The 5G® and 2G™ word marks and logos are registered trademarks owned by Välinge Innovation AB and any use of such marks is under license.

‡ Subject to terms. Commercial warranty covers light commercial use only.



Knight Tile (see page 401 and 433)

4.5 mm
Various, see individual product pages
Various, see individual product pages
2G™ angling installation [§]
12 mil (0.30 mm)
K-Guard+® PU coating
10 Years [†]
Lifetime [†]
No
Pass; Resilient flooring with Rigid Polymeric Core
Class 1
Pass
Pass (Dry 0.8)
Pass
Pass (<450)
Pass
Pass
-
Pass 25000 Cycles
Pass
Pass 700 psi at 0.005"
-
-
ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 69 dB (6" slab w/drop ceiling + QuietChoice)
Pass
-
-
-
None required; Please refer to our installation instructions.
Suitable
Yes



■ Warm Ash RKP8103

Korlok Select Wood




56" x 9" (1420mm x 225mm)*



Baltic Washed Oak **RKP8101**

Page: 349



Antique French Oak **RKP8110**

Page: 358



Shadow Oak **RKP8203**

Page: 347



Washed Velvet Ash **RKP8102**

Page: 362



Baltic Limed Oak **RKP8111**

Page: 344



Barley Oak **RKP8206**

Page: 350



Warm Ash **RKP8103**

Page: 343



Cathedral Oak **RKP8114**

Page: 359



Salvaged Barnwood **RKP8209**

Page: 360



Washed Grey Ash **RKP8104**

Page: 348



Canadian Urban Oak **RKP8116**

Page: 340



Warm Brushed Oak **RKP8215**

Page: 345



Texas White Ash **RKP8105**

Page: 338



Natural Koa **RKP8122**

Page: 357



Ivory Brushed Oak **RKP8217**

Page: 336



Smoked Butternut **RKP8107**

Page: 351



Kilauea Koa **RKP8124**

Page: 356



Baltic Coastal Oak **RKP8236**

Page: 342



Washed Butternut **RKP8108**

Page: 337



Smoked Koa **RKP8126**

Page: 355



Glenmore Oak **RKP8237**

Page: 352



Reclaimed French Oak **RKP8109**

Page: 354



Oyster Oak **RKP8202**


Page: 346



Braemar Oak **RKP8238**


Page: 353

24" x 6" (596mm x 149mm)*




Texas White Ash **SM-RKP8105**

Page: 339



Canadian Urban Oak **SM-RKP8116**

Page: 341



Salvaged Barnwood **SM-RKP8209**

Page: 361



Korlok Select's HoldFast™ warranty guarantees end joints stay secure

* Actual product sizes: 55.91" x 8.86" and 23.46" x 5.87"

Korlok Select Wood

Korlok
Select

RIGID CORE

Korlok Select is the premier rigid core range, with designs developed from rare and treasured American and European woods to create floors that are only available through Karndean Designflooring. From the expressive shadow sawn markings of Oyster Oak to the lively character shifts within the American Barnwoods, Korlok Select has plenty of options to suit your style. With a selection of planks available in both 56" x 9" planks and 24" x 6" herringbone planks, Korlok Select is well-suited for open areas and small rooms alike. Only Korlok Select is equipped with the 5G® locking mechanism, backed by the 15-year HoldFast™ Warranty, which guarantees that securely locked planks will stay together at the end seams.



Canadian Urban Oak RKP8116

	Standard	Result
Thickness	ASTM F386	6.5 mm
Box quantity		Various, see individual product pages
Size	ASTM F2421	Various, see individual product pages
Locking system*		5G® short edge; 2G™ long edge
Surface treatment		K-Guard+® PU coating
Wear layer	ASTM F410	20 mil (0.5 mm)
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Reaction to fire	ASTM E648-06	Class I
Flammability	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry >0.8)
Staining resistance	ASTM F925	Pass (No change)
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	1.6 kV
Abrasion resistance	ASTM D4060	Pass 36000 Cycles
Dimensional stability	ASTM F2199	Pass (-0.003"/lin.ft)
Static load	ASTM F970	Pass 800 psi at 0.005"
Small ball impact	NALFA 3.6	Pass class 4
Large ball impact	NALFA 3.5	Pass class 4
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 72 dB (6" slab w/drop ceiling + QuietChoice)
Indentation-residual	ASTM F 1914	Pass (2.3%)
Thickness swell	NALFA 3.2	Pass class 4
Chair resistance	NALFA 3.9	Pass class 4
Surface bond	NALFA 3.10	Pass class 4
Adhesive	None required; please install according to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Valinge Innovations.

** 5G® short edge; 2G™ long edge except SM-RKP8105, SM-RKP8116 and SM-RKP8209 which are modified 2G™ on short edge and standard 2G™ long edge.

** Subject to terms, see page:447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Korlok
Select Wood

Ivory Brushed Oak RKP8217



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8217
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Washed Butternut RKP8108



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8108
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Texas White Ash RKP8105



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8105
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Texas White Ash SM-RKP8105



Karndean
Designflooring

Korlok
Select Wood

Size	24" x 6" (596mm x 149mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
SM-RKP8105
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Canadian Urban Oak RKP8116



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8116
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Canadian Urban Oak SM-RKP8116



Karndean
Designflooring

Korlok
Select Wood

Size	24" x 6" (596mm x 149mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
SM-RKP8116
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.

Standard data & messaging rates apply.

Baltic Coastal Oak RKP8236



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8236
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Warm Ash RKP8103



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8103
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Baltic Limed Oak RKP8111



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8111
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Warm Brushed Oak RKP8215



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8215
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Oyster Oak RKP8202



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8202
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Shadow Oak RKP8203



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8203
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Washed Grey Ash RKP8104



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8104
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Baltic Washed Oak RKP8101



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8101
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Barley Oak RKP8206



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8206
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked Butternut RKP8107



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8107
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Glenmore Oak RKP8237



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8237
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Braemar Oak RKP8238



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8238
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed French Oak RKP8109



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8109
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked Koa RKP8126



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8126
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Kilauea Koa RKP8124



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8124
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Natural Koa RKP8122



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8122
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Antique French Oak RKP8110



Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8110
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Cathedral Oak RKP8114



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8114
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Salvaged Barnwood RKP8209



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8209
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Salvaged Barnwood SM-RKP8209



Karndean
Designflooring

Korlok
Select Wood

Size	24" x 6" (596mm x 149mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Planks/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
SM-RKP8209
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Washed Velvet Ash RKP8102



Karndean
Designflooring

Korlok
Select Wood

Size	56" x 9" (1420mm x 225mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/34.39 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 335



TEXT
RKP8102
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.



Korlok Reserve Wood

48" x 7" (1220mm x 179mm)*



Page 376

Vintage Oregon Oak **RCP6531**



Page 369

Weathered Oak **RCP6532**



Page 370

North American Oak **RCP6533**



Page 367

Limed Coastal Oak **RCP6534**



Page 374

Aged Spanish Oak **RCP6535**



Page 371

Natural Oiled Oak **RCP6536**



Page 377

Charred Weathered Pine **RCP6539**



Page 375

Grey Oiled Oak **RCP6541**



Page 373

Marron Elm **RCP6543**



Page 368

Ghost Elm **RCP6544**



Page 372

Smoked American Maple **RCP6545**



Page 366

Millstone Sycamore **RCP6546**

* Actual product size: 48.03" x 7.05"

Korlok Reserve Wood

Korlok
Reserve

RIGID CORE

The Korlok Reserve collection combines cutting-edge technology with our original designs to create a beautiful and reliable rigid core option that accommodates imperfect subfloors and areas in need of additional noise reduction qualities. These 48" x 7" planks are equipped with a 2G™ locking mechanism and feature designs developed from oiled, limed and aged oaks, as well as pine and walnut.



■ Aged Spanish Oak RCP6535

	Standard	Result
Thickness		6.5 mm
Size		48.03" x 7.05" (1220 mm x 179 mm)
Box quantity		10 Planks/23.51 sq.ft.
Locking system*		2G™
Wear layer		20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Flammability	FF 1-70; Federal Approval	Pass
Slip resistance***	ASTM D2047	Pass (Dry >0.8)
Staining resistance	ASTM F925	Pass (No change)
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	-1.4 kV
Abrasion resistance	ASTM D4060	Pass 20000 Cycles
Dimensional stability	ASTM F2199	Pass (width -0.003"/lin.ft) Pass (length -0.003"/lin.ft)
Static load	ASTM F970	Pass 250 psi
Small ball impact	NALFA 3.6	Pass class 4
Large ball impact	NALFA 3.5	Pass class 4
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 21 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Indentation - residual	ASTM F 1914	Pass
Thickness swell	NALFA 3.2	Pass class 4
Chair resistance	NALFA 3.9	Pass class 4
Surface bond	NALFA 3.10	Pass class 4
Adhesive	None required; Please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Valinge Innovations.

** Subject to terms, see page: 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Korlok
Reserve
Wood

Millstone Sycamore RCP6546



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6546
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Limed Coastal Oak RCP6534



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6534
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ghost Elm RCP6544



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6544
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Weathered Oak RCP6532



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6532
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

North American Oak RCP6533



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6533
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Natural Oiled Oak RCP6536



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6536
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked American Maple RCP6545



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6545
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Marron Elm RCP6543



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6543
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Spanish Oak RCP6535



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6535
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Oiled Oak RCP6541



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6541
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Vintage Oregon Oak RCP6531



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6531
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Charred Weathered Pine RCP6539



Karndean
Designflooring

Korlok
Reserve
Wood

Size	48" x 7" (1220mm x 179mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page 365

TEXT
RCP6539
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Van Gogh Wood

48" x 7" (1220mm x 179mm)*



Page: 380

Antique Karri **SCB39**



Page: 395

Merbau **SCB41**



Page: 381

Jatoba **SCB42****



Page: 389

Lancewood **SCB44****



Page: 387

Rimu **SCB49**



Page: 396

Aged Kauri **SCB51**



Page: 390

Wellington Oak **SCB53****



Page: 397

Christchurch Oak **SCB54**



Page: 394

Smoked Oak **SCB70**



Page: 383

Reclaimed Maple **SCB71**



Page: 384

Vintage Pine **SCB76****



Page: 385

Country Oak **SCB81**



Page: 382

French Oak **SCB85**



Page: 391

Classic Oak **SCB86**



Page: 399

Ebony **SCB89**



Page: 398

Tawny Oak **SCB91**




Page: 392

Hessian Oak **SCB93**




Page: 386

Honey Oak **SCB94**



Page: 393

Reclaimed Redwood **SCB99****



Page: 388

Aged Redwood **SCB100****

**Please note: as a feature of the design, these products incorporate a high color variation between individual tiles.

* Actual product size: 48.03" x 7.05"

Van Gogh Wood

Van Gogh

RIGID CORE

The iconic Van Gogh range showcases enduring American style and performance while capturing nature in its rawest form. A selection of these best-selling visuals are now available in a rigid core construction, giving you the visuals you want in the format you need.



■ Aged Redwood SCB100

	Standard	Result
Thickness	ASTM F386	4.5 mm
Size		48.03" x 7.09" (1220 mm x 180 mm)
Box quantity		10 Planks/23.64 sq.ft.
Locking system*		Click-locking
Wear layer	ASTM F410	20 mil (0.5 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	1.1 kV
Abrasion resistance	ASTM D4060	Pass 20000 Cycles
Dimensional stability	ISO 23999	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 69 dB (6" slab w/drop ceiling) IIC = 71 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	Pass 600 psi at 0.005"
Indentation - residual	ASTM F1914	Pass
Adhesive	None required; please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Flooring Industries.

** Subject to terms, see page: 447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Van Gogh
Wood

Antique Karri SCB39



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB39
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Jatoba SCB42



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB42
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

French Oak SCB85



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB85
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed Maple SCB71



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB71
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Vintage Pine SCB76



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB76
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Country Oak SCB81



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB81
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Honey Oak SCB94



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB94
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Rimu SCB49



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB49
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Redwood SCB100



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB100
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lancewood SCB44



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB44
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Wellington Oak SCB53



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB53
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Classic Oak SCB86



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB86
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Hessian Oak SCB93



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB93
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Reclaimed Redwood SCB99



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB99
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Smoked Oak SCB70



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB70
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Merbau SCB41



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB41
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Kauri SCB51



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB51
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Christchurch Oak SCB54



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB54
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Tawny Oak SCB91



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB91
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Ebony SCB89



Karndean
Designflooring

Van Gogh
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Planks/23.64 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 379

TEXT
SCB89
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Knight Tile Wood

48" x 7" (1220mm x 179mm)*



Page: 406

Pale Limed Oak **SCB-KP94**



Page: 410

Mid Limed Oak **SCB-KP96**



Page: 407

Classic Limed Oak **SCB-KP97**



Page: 411

Aged Oak **SCB-KP98**



Page: 405

Lime Washed Oak **SCB-KP99**



Page: 402

White Painted Pine **SCB-KP105**



Page: 403

Grey Scandi Pine **SCB-KP131**



Page: 404

Grey Limed Oak **SCB-KP138**



Page: 408

Nickel Spotted Gum **SCB-KP140**



Page: 409

Urban Spotted Gum **SCB-KP141**

* Actual product size: 48.03" x 7.05"

Knight Tile Wood



Filled with effortlessly stylish American classics that have universal appeal, a selection of Knight Tile woods are now available in an additional rigid core construction, allowing you to enjoy highly-favored designs and K-Core® technology.



■ Grey Limed Oak SCB-KP138

	Standard	Result
Thickness	ASTM F386	4.5 mm
Size		48.03" x 7.09" (1220 mm x 180 mm)
Box quantity		14 Planks/33.09 sq.ft.
Locking system*		2G™ angling installation
Wear layer	ASTM F410	12 mil (0.30 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	10 Years Lifetime
Beveled edge		No
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass 25000 Cycles
Dimensional stability	ISO 23999	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 69 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	Pass 700 psi at 0.005"
Indentation - residual	ASTM F1914	Pass
Adhesive	None required; please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* 2G™ is a patented technology invented by Valinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Valinge Innovation AB and any use of such marks is under license.
 ** Subject to terms. Commercial warranty covers light commercial use only.
 *** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Knight Tile
Wood

White Painted Pine SCB-KP105



Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP105
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Scandi Pine SCB-KP131



Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP131
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Limed Oak SCB-KP138



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP138
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Lime Washed Oak SCB-KP99



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP99
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Pale Limed Oak SCB-KP94



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP94
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Classic Limed Oak SCB-KP97



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP97
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Nickel Spotted Gum SCB-KP140



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP140
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Urban Spotted Gum SCB-KP141



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP141
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Mid Limed Oak SCB-KP96



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401

TEXT
SCB-KP96
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Oak SCB-KP98



Karndean
Designflooring

Knight Tile
Wood

Size	48" x 7" (1220mm x 180mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	14 Planks/33.09 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 401


TEXT
SCB-KP98
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Korlok Select Stone




18" x 24" (457mm x 600mm)*




Page: 422

Shadow Lace **RKT2407**




Page: 418

Alpine Lace **RKT2408**




Page: 427

Volcanic Slate **RKT3001-G**

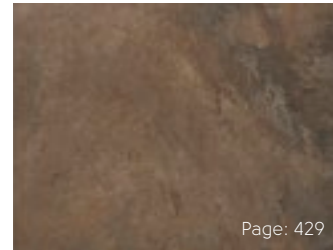


Page: 429

Antique Copper **RKT3002-G**




Page: 424

Mountain Slate **RKT3003-G**




Page: 426

Coastal Fog **RKT3004-G**




Page: 419

Arctic Mist **RKT3005-G**




Page: 430

Black Sands **RKT3006-G**




Page: 420

Metro Grey **RKT3007-G**




Page: 428

Oxford Grey **RKT3008-G**




Page: 425

Pebble Grey **RKT3009-G**




Page: 423

Sandstorm **RKT3010-G**




Page: 421

Aged Parchment **RKT3011-G**



Page: 416

Palazzo Marble **RKT3012-G**



Page: 414

Brunella Marble **RKT3013-G**



Korlok Select's HoldFast™ warranty guarantees end joints stay secure

6" x 24" (149mm x 596mm)*



Page: 417

Palazzo Marble **SM-RKT3012-G**



Page: 415

Brunella Marble **SM-RKT3013-G**

* Actual product sizes: 17.99" x 23.62" and 5.87" x 23.46"

Korlok Select Stone

Korlok
Select

RIGID CORE

With 17 products inspired by antique French cotta, Calacatta marble, slate, limestone and including Moorish stenciled tiles; and featuring a number of elements that facilitate a quick and easy installation, Korlok Select stones are an ideal floating alternative to porcelain tile.

Color-coordinated, nonporous and stain-resistant InteGrout™ is seamlessly attached to all visuals except the stenciled patterns (RKT2407 & RKT2408), eliminating the messy and time-consuming grouting process entirely.



■ Pebble Grey RKT3009-G

	Standard	Result
Thickness	ASTM F386	6.5 mm
Box quantity		Various, see individual product pages
Size	ASTM F2421	Various, see individual product pages
Locking system*		5G® short edge; 2G™ long edge
Surface treatment		K-Guard+® PU coating
Wear layer	ASTM F410	20 mil (0.5 mm)
Warranty**	Commercial Residential	15 Years Lifetime
Beveled edge		Micro
Reaction to fire	ASTM E648-06	Class I
Flammability	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry >0.8)
Staining resistance	ASTM F925	Pass (No change)
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Electrostatic propensity	AATCC 134	1.6 kV
Abrasion resistance	ASTM D4060	Pass 36000 Cycles
Dimensional stability	ASTM F2199	Pass (-0.003"/lin.ft)
Static load	ASTM F970	Pass 800 psi at 0.005"
Small ball impact	NALFA 3.6	Pass class 4
Large ball impact	NALFA 3.5	Pass class 4
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 72 dB (6" slab w/drop ceiling + QuietChoice)
Indentation-residual	ASTM F 1914	Pass (2.3%)
Thickness swell	NALFA 3.2	Pass class 4
Chair resistance	NALFA 3.9	Pass class 4
Surface bond	NALFA 3.10	Pass class 4
Adhesive	None required; please install according to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* Produced under Licence from Valinge Innovations.

** 5G® short edge; 2G™ long edge except SM-RKT3012-G and SM-RKT3013-G which are modified 2G™ on short edge and standard 2G™ long edge.

** Subject to terms, see page:447.

*** Slip resistance is measured on ex-factory product. Slip resistance can be affected by surface contamination, use and how the product is maintained.

Korlok
Select Stone

Brunella Marble RKT3013-G



Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3013-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Brunella Marble SM-RKT3013-G



Korlok
Select Stone

Size	6" x 24" (149mm x 596mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Tiles/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
SM-RKT3013-G
to 877-850-0376
for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Palazzo Marble RKT3012-G



Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3012-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Palazzo Marble SM-RKT3012-G



Korlok
Select Stone

Size	6" x 24" (149mm x 596mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	22 Tiles/21.03 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
SM-RKT3012-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Alpine Lace RKT2408*



Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT2408
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

* These tiles do not feature InteGrout™

Arctic Mist RKT3005-G



Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3005-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Metro Grey RKT3007-G



Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:
Class III Type B
Residential, Commercial

Slip Resistance/Result:
ASTM D2047 Pass (Dry >0.8)

Technical Specifications:
Page: 413



TEXT
RKT3007-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Aged Parchment RKT3011-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3011-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Shadow Lace RKT2407*



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT2407
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

* These tiles do not feature InteGrout™

Sandstorm RKT3010-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3010-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Mountain Slate RKT3003-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3003-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Pebble Grey RKT3009-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3009-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Coastal Fog RKT3004-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3004-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Volcanic Slate RKT3001-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3001-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Oxford Grey RKT3008-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3008-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Antique Copper RKT3002-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3002-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Black Sands RKT3006-G



Karndean
Designflooring

Korlok
Select Stone

Size	18" x 24" (457mm x 600mm)
Thickness	6.5mm
Wear Layer	20mil (0.5mm)
Bevel	Micro
Box Quantity	10 Tiles/29.51 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry >0.8)

Technical Specifications:

Page: 413



TEXT
RKT3006-G
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.




Korlok
Select Stone

Black Sands RKT3006-G

Knight Tile Stone

12" x 24" (308 mm x 600 mm)*

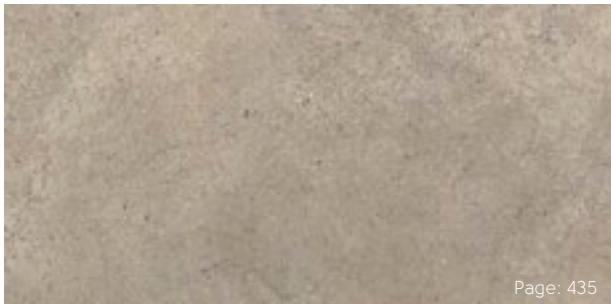

Portland Stone **SCB-ST13**



Grey Riven Slate **SCB-ST16**



Honed Oyster Slate **SCB-ST17**

* Actual product size: 12.13" x 23.62"

Knight Tile Stone

Knight Tile

RIGID CORE

For effortlessly stylish American stone classics with universal appeal, look to our selection of Knight Tile rigid core stones and enjoy all the benefits of our K-Core® technology in these favorite visuals.



■ Honed Oyster Slate SCB-ST17

	Standard	Result
Thickness	ASTM F386	4.5 mm
Size		12.13" x 23.62" (308 mm x 600 mm)
Box quantity		16 Tiles/31.83 sq.ft.
Locking system*		2G™ angling installation
Wear layer	ASTM F410	12 mil (0.30 mm)
Surface treatment		K-Guard+® PU coating
Warranty**	Commercial Residential	10 Years Lifetime
Beveled edge		No
Standards	ASTM F3261	Pass; Resilient flooring with Rigid Polymeric Core
Reaction to fire	ASTM E648-06	Class 1
Smoke density	ASTM E662-06	Pass (<450)
Flammability test	ASTM D2859	Pass
Slip resistance***	ASTM D2047	Pass (Dry 0.8)
Staining resistance	ASTM F925	Pass
Heat fastness	ASTM F1514	Pass
Light fastness	ASTM F1515	Pass
Abrasion resistance	ASTM D4060	Pass 25000 Cycles
Dimensional stability	ISO 23999	Pass
Acoustic impact noise reduction	ASTM E2179-09 ASTM E492-09	ΔIIC = 22 dB IIC = 68 dB (6" slab w/drop ceiling) IIC = 69 dB (6" slab w/drop ceiling + QuietChoice)
Static load	ASTM F970	Pass 700 psi at 0.005"
Indentation - residual	ASTM F1914	Pass
Adhesive	None required; please refer to our installation instructions.	
Recycling		Suitable
Phthalate free		Yes

* 2G™ is a patented technology invented by Valinge Innovation AB. The 2G™ word mark and logo are registered trademarks owned by Valinge Innovation AB and any use of such marks is under license.

** Subject to terms. Commercial warranty covers light commercial use only.

*** Slip resistance is measured on freestanding ex-factory product. Slip resistance can be affected by many factors including but not limited to: product installation and underlayment, surface contamination, use, wear and how the product is maintained. Textural variation along the surface of the product can affect nominal values.

Knight Tile
Stone

Honed Oyster Slate **SCB-ST17**



Knight Tile
Stone

Size	12" x 24" (308mm x 600mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	16 Tiles/31.83 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 433

TEXT
SCB-ST17
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Portland Stone SCB-ST13



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 24" (308mm x 600mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	16 Tiles/31.83 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 433

TEXT
SCB-ST13
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.

Grey Riven Slate SCB-ST16



Karndean
Designflooring

Knight Tile
Stone

Size	12" x 24" (308mm x 600mm)
Thickness	4.5mm
Wear Layer	12mil (0.3mm)
Bevel	No
Box Quantity	16 Tiles/31.83 sq.ft.

Suitability/Application:

Class III Type B
Residential, Commercial

Slip Resistance/Result:

ASTM D2047 Pass (Dry 0.8)

Technical Specifications:

Page: 433

TEXT
SCB-ST16
to 877-850-0376

for technical data, installation
instructions, to order a sample or
for more information.
Standard data & messaging rates apply.



Knight Tile
Stone

■ Grey Riven Slate SCB-ST16



Resources



Adhesives & sundries

Specially formulated products designed for optimum performance of your Karndean Designfloor.



QuietChoice

- Covers 100 sq. ft. per roll
- Achieve an IIC up to 72 when using QuietChoice and Karndean Designflooring luxury vinyl products (ASTM E492)
- Resists mold and mildew
- High shear strength



Designflooring Tool Kit

- Combi Scribe
- Miter Box Scissors
- Pressure Duo Roller
- Fastrimmer Top and Bottom Beveller
- Flex Steel Straightedge 6'
- Dolphin Knife



K99 HM

- Trowel Application
- Available in 1 gal. or 4 gal. pails
- Covers 220 to 260 sq. ft. per gallon and 2 hour open time
- May be used on substrates with moisture readings up to 99% RH
- High shear strength



Karndean DrySet

- Applied with 3/8" nap roller
- Available in 1 gal. or 4 gal. pails
- Covers 350-450 sq. ft. per gallon
- May be used on substrates with moisture readings up to 95% RH
- Dries in 10-15 minutes



Karndean K-Spray

- 22 oz. cans
- Covers 150-185 sq. ft. per can
- May be used on substrates with moisture readings up to 98% RH
- Dries in 10-20 minutes



2-Part Epoxy Resin

- Trowel Application
- Available in 1 gal. pails
- Covers 130 to 150 sq. ft. per gallon
- A two-part adhesive providing an extremely strong bond
- Recommended for areas subject to excessive temperature



Kovara™ 95

- Rolls are 5 ft. wide x 144 ft. long
- 720 sq. ft. per roll
- Suppresses moisture up to 95% RH
- Mold and fungus resistant
- Can eliminate days from normal project schedules
- Must use gray Kovara™ Seam Tape



Kovara™ MBX

- Rolls are 5 ft. wide x 144 ft. long
- 720 sq. ft. per roll
- Suppresses moisture up to 99.5% RH in concrete
- Mold and fungus resistant
- Can eliminate days from normal project schedules
- Must use black Kovara™ Seam Tape and White Double Sided Tape



Arndean Designflooring?

- Warm**
Our flooring is made from 100% recycled and sustainable materials.
- Durable**
Our flooring is made from 100% recycled and sustainable materials.
- Fast**
Our flooring is made from 100% recycled and sustainable materials.
- Resilient**
Our flooring is made from 100% recycled and sustainable materials.
- Stylish**
Our flooring is made from 100% recycled and sustainable materials.
- Acoustic**
Our flooring is made from 100% recycled and sustainable materials.
- Green**
Our flooring is made from 100% recycled and sustainable materials.
- Odourless**
Our flooring is made from 100% recycled and sustainable materials.
- Low maintenance**
Our flooring is made from 100% recycled and sustainable materials.

Cleaning & maintenance

Cleaning guide

Karndean floors are very durable, but as with any flooring, they need to be looked after. There are many ways to protect your Karndean floor and prevent damage. We recommend following our Cleaning & Maintenance instructions and reading our Maintenance Advice for helpful hints and tips on how to care for your floor.

Maintaining your floor

The floor should be cleaned regularly, though the frequency will depend upon the level of traffic across the floor and the amount of dust and dirt transferred from the surrounding environment.

1. Remove loose dust and dirt from the floor using a soft brush or dust mop.
2. Dilute **Karndean Clean** in accordance with the label instructions.
3. Liberally apply the cleaning solution over the entire floor using a clean mop, then soak up the cleaning solution using a damp (not wet) mop and leave to dry.
4. Thoroughly clean the mop with cold running water.

Commercial **Karndean Clean** can be used with automatic cleaning appliances (e.g. scrubbing machines), especially for larger areas or for the removal of stubborn dirt.



Refreshing your floor

Over time, heavy traffic will wear at the surface of your Karndean floor. To restore your floor, we recommend the use of **Karndean Remove** and **Karndean Refresh**.

Before applying Karndean Remove:

1. Remove all free-standing objects from the floor.
2. Vacuum or clean any entrance matting or rugs and set aside.
3. Remove loose dust and dirt from the floor using a soft brush or dust mop.

Applying Karndean Remove using a mop and scrubbing pad:

1. Mix **Karndean Remove** in accordance with the label instructions.
2. Apply cleaning solution to the floor using a mop, working in an area no larger than 16' x 16' (5m x 5m) at a time.
3. Allow the solution to remain on the floor for approximately 10 minutes, but do not allow it to dry.
4. Scrub the floor using a white scrubbing pad fitted to an applicator.

Applying Karndean Remove using a rotary scrubber:

1. Mix **Karndean Remove** in accordance with the label instructions and pour into rotary scrubber machine.
2. Scrub the floor using the rotary scrubber fitted with a red scrubbing pad. For the edges of the floor and hard to reach areas, use a white scrubbing pad fitted to the end of an applicator.

NOTE: Rotary Scrubber should not exceed 175 rpm.

Removal of Karndean Remove:

1. Remove all residue with a wet vacuum or mop, and rinse the floor using clean water.
2. After the floor has dried, check to ensure that all residue has been removed.
3. Equipment should be cleaned in cold running water and stored safely.

Applying Karndean Refresh:

When using **Karndean Refresh**, avoid (where possible) strong sunlight and drafts and ensure all under floor heating is switched off before starting work.

1. Using a lint free mop, apply undiluted **Karndean Refresh** in a thin, even coat using overlapping strokes. Where possible, work parallel to the main light source (e.g. window).
2. Allow the floor to dry for approximately 30 minutes.
3. Apply a second coat of **Karndean Refresh**, working in the opposite direction to the first coat.
4. Allow the floor to dry for at least six hours, preferably overnight.
5. Thoroughly clean the mop with cold running water.






Customer support

We pride ourselves on offering quick, easy and reliable support – because you have a job to do. We keep unparalleled stock levels across our three US distribution centers and are focused on stocking for customer needs, so you can rest assured that your order can be delivered in as little as a few days.

Your Karndean Commercial Business Manager (CBM) is your first point of contact, available to answer any questions and get you the materials you need to complete your projects on time, from technical datasheets to our EPD, and everything in between.

Our Customer Service department is available to assist you Monday through Friday from 8am to 8pm (ET). Contact Customer Service to check stock, place an order, request samples or literature, and to ask any additional questions. For installation questions or for assistance on the job, contact our Customer Service department and ask for our Technical Support team.

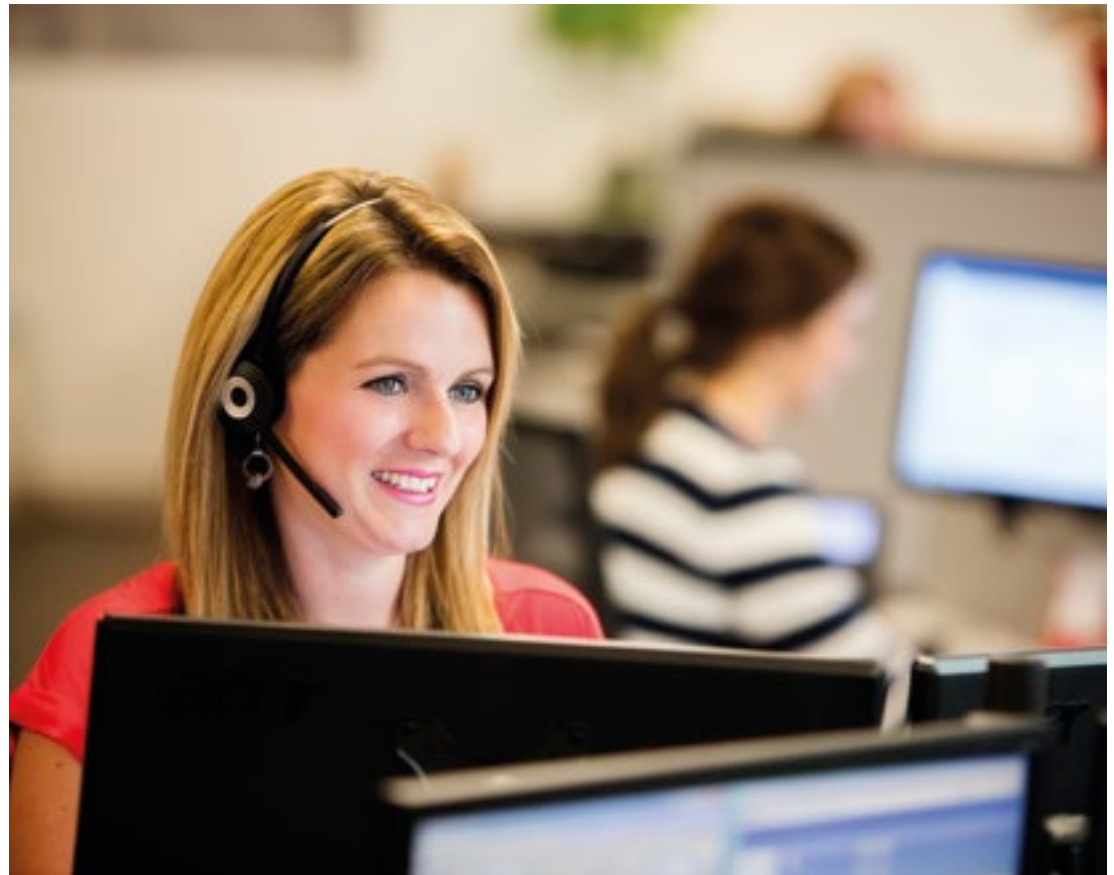

Not sure who to call? Give our Customer Service line a call at 888-266-4343 and we can point you in the right direction.

CEUs

Continuing Education Units

As a design-driven company, we look to the future to develop products that will complement industry trends, and having specialized in luxury vinyl for more than 45 years we know the ins and outs of luxury vinyl. Our Continuing Education Units (CEU) program offers a variety of courses to educate architects and designers on the latest innovations and useful information relevant to luxury vinyl and interior design.


To view our current list of CEU courses, visit www.karndean.com/CEU.



Sample service

Product samples are an integral part of putting together a proper proposal. We have both swatch and full size product samples available to order, so whether you're building a project moodboard or want to compare product sizes, we have the materials you need. Visit karndean.com to get started.

Do you specify Karndean Designflooring often? Ask your CBM about acquiring a full set of our architectural folders for your library.

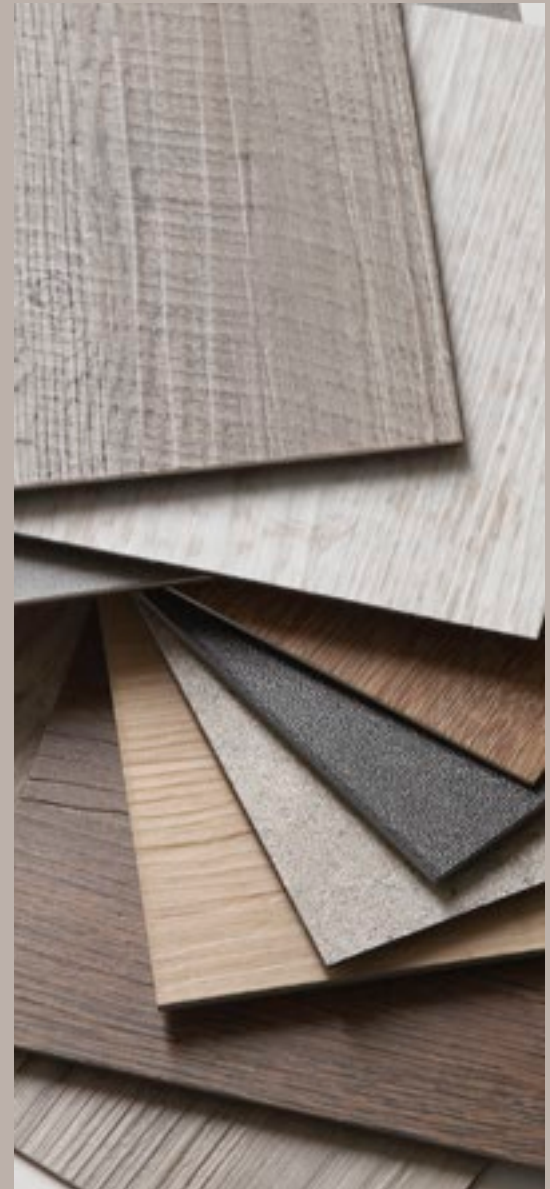

Warranty

Definitions

1. "Wear out" is defined as the removal of pattern from the product.
2. "Lifetime" is defined as 35 years.
3. "Commercial" installation is defined as one in which business is conducted.
4. "Residential" installation is defined as all areas within a home or apartment.

Scope

Used in Commercial premises, Karndean (hereinafter referred to as "the Company") offers a comprehensive product and installation warranty against product wear out and manufacturing defects.

- Art Select 20 years
- Da Vinci 20 years
- Van Gogh 15 years
- Opus 15 years
- Knight Tile 10 years*
- Karndean LooseLay 15 years
- Karndean LooseLay Longboard 15 years
- Korlok Select 15 years
- Korlok Reserve 15 years
- Van Gogh rigid core 15 years
- Knight Tile rigid core 10 years*

Used in Residential premises, the Company offers a lifetime product and installation warranty against product wear out and manufacturing defects.

Conditions

The warranty is conditional on the following having been met:

1. Gluedown product: The product has been fitted by a professional installer according to the current installation instructions at the time of installation. Loose lay product: The product has been fitted according to the current installation instructions at the time of installation.
2. The subfloor meets the building standards, current at the time of installation, and the adhesives recommended for the application were used.
3. The product used has been correctly specified for the use of room in which it was installed.
4. Maintenance is according to the Company's cleaning and maintenance instructions.

Exclusions

The following exclusions shall apply:

1. Defects caused by sub-standard installation.
2. Any accidental damage (fire, flood, lack of barrier matting at any external entrance, etc.).
3. Any claim resulting from a manufacturing defect, which is not notified to the Company within 6 months of installation.
4. Damage to products that are a result of poor maintenance.

5. Defects caused by poor subfloor preparation, including residual moisture in the subfloor.
6. Damage caused by stains, excessive heat, cuts and/or other abuses that the floor may be subjected to during use.
7. Fading.
8. Damage caused by indentation and abrasion: e.g. unprotected caster wheels, furniture legs, high and spiked heels.

Claims

1. All claims must be submitted to the Company in writing as soon as they become apparent.
2. The Company will require information on the claim, including a copy of the invoice, product detail, installation/subfloor information, samples removed from the installation, photographs and a report of the defect.
3. Once the claim is raised, the Company will carry out an investigation, and satisfying themselves that the problem is their responsibility, will replace any defective material at no charge with the same or similar product.

The Company will also reimburse a proportionate cost towards labor, uplift and reinstallation, providing costs are agreed with the Company before work commences.

*Commercial warranty covers light commercial use only.

This warranty does not affect your statutory rights.

Product index by code

Wood

EW01 Hickory Paprika.....	57	LLP111 Boston.....	270	RKP8116 Canadian Urban Oak.....	340	SCB-KP141 Urban Spotted Gum.....	409
EW02 Hickory Peppercorn.....	59	LLP112 Hartford.....	272	RKP8122 Natural Koa.....	357	SCB-KP94 Pale Limed Oak.....	406
EW03 Hickory Nutmeg.....	58	LLP113 Cambridge.....	281	RKP8124 Kilauea Koa.....	356	SCB-KP96 Mid Limed Oak.....	410
EW11 Weathered Hickory.....	53	LLP301 Twilight Oak.....	285	RKP8126 Smoked Koa.....	355	SCB-KP97 Classic Limed Oak.....	407
EW12 Vintage Hickory.....	55	LLP302 Raven Oak.....	287	RKP8202 Oyster Oak.....	346	SCB-KP98 Aged Oak.....	411
EW13 Classic Hickory.....	52	LLP303 Antique Heart Pine.....	289	RKP8203 Shadow Oak.....	347	SCB-KP99 Lime Washed Oak.....	405
EW21 Reclaimed Chestnut.....	54	LLP304 Weathered Heart Pine.....	275	RKP8206 Barley Oak.....	350	SCB39 Antique Karri.....	380
EW22 Salvaged Chestnut.....	56	LLP305 Reclaimed Heart Pine.....	283	RKP8209 Salvaged Barnwood.....	360	SCB41 Merbau.....	395
HC01 Dawn Oak.....	60	LLP306 Pearl Oak.....	273	RKP8215 Warm Brushed Oak.....	345	SCB42 Jatoba.....	381
HC03 Dusk Oak.....	61	LLP307 Neutral Oak.....	282	RKP8217 Ivory Brushed Oak.....	336	SCB44 Lancewood.....	389
HC04 Sundown Oak.....	62	LLP308 French Grey Oak.....	278	RKP8236 Baltic Coastal Oak.....	342	SCB49 Rimu.....	387
HC06 Midnight Oak.....	63	LLP309 Taupe Oak.....	280	RKP8237 Glenmore Oak.....	352	SCB51 Aged Kauri.....	396
KP32 Sycamore.....	159	LLP310 Champagne Oak.....	274	RKP8238 Braemar Oak.....	353	SCB53 Wellington Oak.....	390
KP35 Cedar.....	160	LLP315 Character Walnut.....	288	RL01 Spring Oak.....	67	SCB54 Christchurch Oak.....	397
KP36 Walnut.....	163	LLP317 Lemon Spotted Gum.....	276	RL02 Summer Oak.....	69	SCB70 Smoked Oak.....	394
KP37 Elm.....	161	LLP330 Worn Fabric Oak.....	279	RL03 Autumn Oak.....	70	SCB71 Reclaimed Maple.....	383
KP39 Warm Oak.....	162	LLP331 Shadow Fabric Oak.....	277	RL04 Winter Oak.....	71	SCB76 Vintage Pine.....	384
KP67 Aran Oak.....	171	LLP332 Urban Fabric Oak.....	284	RL05 Spanish Cherry.....	75	SCB81 Country Oak.....	385
KP69 Larne Oak.....	173	LLP333 Vanilla Oak.....	272	RL07 Santina Cherry.....	74	SCB85 French Oak.....	382
KP70 Bray Oak.....	175	LLP335 Weathered American Pine.....	281	RL09 Coffee Maple.....	73	SCB86 Classic Oak.....	391
KP90 Honey Maple.....	158	LLP336 Distressed American Pine.....	286	RL11 Toasted Maple.....	72	SCB89 Ebony.....	399
KP93 Native Koa.....	174	RCP6531 Vintage Oregon Oak.....	376	RL12 Storm Oak.....	68	SCB91 Tawny Oak.....	398
KP94 Pale Limed Oak.....	164	RCP6532 Weathered Oak.....	369	RL21 Glacier Oak.....	64	SCB93 Hessian Oak.....	392
KP96 Mid Limed Oak.....	169	RCP6533 North American Oak.....	370	RL23 Savannah Oak.....	66	SCB94 Honey Oak.....	386
KP97 Classic Limed Oak.....	170	RCP6534 Limed Coastal Oak.....	367	RP41 Australian Walnut.....	91	SCB99 Reclaimed Redwood.....	393
KP98 Aged Oak.....	176	RCP6535 Aged Spanish Oak.....	374	RP61 Canadian Maple.....	78	SCB100 Aged Redwood.....	388
KP99 Lime Washed Oak.....	166	RCP6536 Natural Oiled Oak.....	371	RP73 Kenyan Tigerwood.....	82	SM-RKP8105 Texas White Ash.....	339
KP105 White Painted Pine.....	156	RCP6539 Charred Weathered Pine.....	377	RP91 Lorenzo Warm Oak.....	83	SM-RKP8116 Canadian Urban Oak.....	341
KP107 Sienna.....	172	RCP6541 Grey Oiled Oak.....	375	RP94 Scorched Oak.....	92	SM-RKP8209 Salvaged Barnwood.....	361
KP131 Grey Scandi Pine.....	157	RCP6543 Marron Elm.....	373	RP95 Blended Oak.....	89	SM-RL21 Glacier Oak.....	65
KP138 Grey Limed Oak.....	165	RCP6544 Ghost Elm.....	368	RP96 Limed Silk Oak.....	85	VG1-7 Bracken.....	116
KP140 Nickel Spotted Gum.....	167	RCP6545 Smoked American Maple.....	372	RP97 Limed Jute Oak.....	84	VG5-7 Burnt Ginger.....	106
KP141 Urban Spotted Gum.....	168	RCP6546 Millstone Sycamore.....	366	RP98 Limed Linen Oak.....	79	VGW33T Copper Gum.....	109
LLP5-7 Burnt Ginger.....	287	RKP8101 Baltic Washed Oak.....	349	RP99 Limed Cotton Oak.....	87	VGW39T Antique Karri.....	103
LLP33 Copper Gum.....	275	RKP8102 Washed Velvet Ash.....	362	RP100 Coastal Driftwood.....	86	VGW40T Melbourne Larch.....	98
LLP38 Tasmanian Wattle.....	283	RKP8103 Warm Ash.....	343	RP101 Beach Driftwood.....	90	VGW41T Merbau.....	119
LLP39 Antique Karri.....	282	RKP8104 Washed Grey Ash.....	348	RP102 Natural Oak.....	80	VGW42T Jatoba.....	104
LLP91 Merbau.....	289	RKP8105 Texas White Ash.....	338	RP103 Harvest Oak.....	81	VGW44T Lancewood.....	111
LLP92 Country Oak.....	278	RKP8107 Smoked Butternut.....	351	RP104 Single Smoked Acacia.....	88	VGW49T Rimu.....	102
LLP94 Newport.....	280	RKP8108 Washed Butternut.....	337	RP105 Double Smoked Acacia.....	93	VGW50T Macrocapra.....	96
LLP95 Ashland.....	288	RKP8109 Reclaimed French Oak.....	354	SCB-KP105 White Painted Pine.....	402	VGW51T Aged Kauri.....	117
LLP108 Providence.....	279	RKP8110 Antique French Oak.....	358	SCB-KP131 Grey Scandi Pine.....	403	VGW53T Wellington Oak.....	107
LLP109 Stamford.....	277	RKP8111 Baltic Limed Oak.....	344	SCB-KP138 Grey Limed Oak.....	404	VGW54T Christchurch Oak.....	118
LLP110 Burlington.....	284	RKP8114 Cathedral Oak.....	359	SCB-KP140 Nickel Spotted Gum.....	408	VGW70T Smoked Oak.....	114

Wood (cont.)

■ VGW71T Reclaimed Maple.....	101
■ VGW76T Vintage Pine.....	108
■ VGW81T Country Oak.....	99
■ VGW85T French Oak.....	97
■ VGW86T Classic Oak.....	112
■ VGW89T Ebony.....	126
■ VGW91T Tawny Oak.....	123
■ VGW92T Burgundy Oak.....	110
■ VGW93T Hessian Oak.....	113
■ VGW94T Honey Oak.....	105
■ VGW95T Lime Washed Cypress.....	120
■ VGW96T Burnished Cypress.....	121
■ VGW97T Burnished Beech.....	127
■ VGW98T Smoked Beech.....	125
■ VGW99T Reclaimed Redwood.....	115
■ VGW100T Aged Redwood.....	100
■ VGW101T Salvaged Redwood.....	122
■ VGW102T Charred Oak.....	124
■ WP311 Grano.....	131
■ WP312 Palleo.....	133
■ WP313 Ignea.....	141
■ WP315 Aurum.....	136
■ WP316 Rubra.....	147
■ WP317 Atra.....	153
■ WP318 Carbo.....	151
■ WP321 Luteus.....	142
■ WP322 Canitia.....	138
■ WP324 Tergo.....	152
■ WP325 Arrado.....	146
■ WP326 Natural Walnut.....	145
■ WP328 Washed Walnut.....	140
■ WP329 Bleached Grey Walnut.....	139
■ WP330 Tenebra Walnut.....	150
■ WP331 Textum.....	130
■ WP411 Niveus.....	132
■ WP413 Magna.....	137
■ WP414 Argen.....	148
■ WP415 Ordo.....	144
■ WP416 Linea.....	134
■ WP417 Sylva.....	149
■ WP511 Weathered Elm.....	135
■ WP513 Golden Teak.....	143

Stone

■ CC08 Oxide.....	207
■ CER11 Molten.....	208
■ CER12 Iron Ore.....	209
■ CER13 Eisen.....	206
■ CER14 Carbon.....	211
■ CER15 Dune.....	200
■ CER16 Sable.....	203
■ CER17 Drift.....	205
■ CER19 Burnet.....	204
■ CER20 Cambric.....	201
■ CER21 Sindon.....	210
■ CLIF-01 Clifton.....	226
■ CLIF-04 Clifton.....	227
■ LLT201 Colorado.....	313
■ LLT202 Indiana.....	310
■ LLT203 Montana.....	318
■ LLT206 Georgia.....	315
■ LLT208 Tino.....	308
■ LLT209 Capri.....	311
■ LLT211 Vulcano.....	319
■ LLT212 Dakota.....	317
■ LLT213 Maine.....	312
■ LLT214 Seattle.....	309
■ LLT217 Vermont.....	316
■ LLT218 Ontario.....	308
■ LM01 Jersey.....	193
■ LM02 Guernsey.....	194
■ LM03 Alderney.....	192
■ LM05 Melbourne.....	187
■ LM06 Canberra.....	189
■ LM07 Washburn.....	180
■ LM08 Caldera.....	184
■ LM09 Gallatin.....	182
■ LM15 Otono.....	191
■ LM16 Fiore.....	190
■ LM20 Herm.....	195
■ LM21 Oakeley.....	188
■ LM22 Corris.....	186
■ LM27 Washburn.....	181
■ LM28 Caldera.....	185
■ LM29 Gallatin.....	183
■ LST03 Piazza Limestone.....	198
■ LST04 Spirito Limestone.....	199

■ LST05 Santi Limestone.....	202
■ MAYF-01 Mayfair.....	228
■ MAYF-02 Mayfair.....	229
■ RKT2407 Shadow Lace.....	422
■ RKT2408 Alpine Lace.....	418
■ RKT3001-G Volcanic Slate.....	427
■ RKT3002-G Antique Copper.....	429
■ RKT3003-G Mountain Slate.....	424
■ RKT3004-G Coastal Fog.....	426
■ RKT3005-G Arctic Mist.....	419
■ RKT3006-G Black Sands.....	430
■ RKT3007-G Metro Grey.....	420
■ RKT3008-G Oxford Grey.....	428
■ RKT3009-G Pebble Grey.....	425
■ RKT3010-G Sandstorm.....	423
■ RKT3011-G Aged Parchment.....	421
■ RKT3012-G Palazzo Marble.....	416
■ RKT3013-G Brunella Marble.....	414
■ SCB-ST13 Portland Stone.....	435
■ SCB-ST16 Grey Riven Slate.....	436
■ SCB-ST17 Honed Oyster Slate.....	434
■ SM-RKT3012-G Palazzo Marble.....	417
■ SM-RKT3013-G Brunella Marble.....	415
■ SM-SP216 Fumo.....	218
■ SPI15 Nero.....	214
■ SP218 Lutum.....	220
■ SP219 Casablanca.....	221
■ SP220 Marrakesh.....	222
■ SP212 Terra.....	215
■ SP213 Urbus.....	216
■ SP215 Ferra.....	217
■ SP216 Fumo.....	219
■ SP714 Clarus.....	223
■ SP716 Aurego.....	224
■ SP718 Texo.....	225
■ ST5 Soapstone.....	234
■ ST12 Bath Stone.....	235
■ ST13 Portland Stone.....	237
■ ST14 Cumbrian Stone.....	241
■ ST16 Grey Riven Slate.....	238
■ ST17 Honed Oyster Slate.....	233
■ T74 Midnight Black.....	242
■ T84 Copper.....	240

■ T89 Andecite.....	239
■ T90 Carrara.....	232
■ T99 Rona.....	236

Product index by name

Wood

■ Aged Kauri SCB51.....	396	■ Cedar KP35.....	160	■ Hickory Nutmeg EW03.....	58	■ Newport LLP94.....	280
■ Aged Kauri VGW5IT.....	117	■ Champagne Oak LLP310.....	274	■ Hickory Paprika EW01.....	57	■ Nickel Spotted Gum KP140.....	167
■ Aged Oak KP98.....	176	■ Character Walnut LLP315.....	288	■ Hickory Peppercorn EW02.....	59	■ Nickel Spotted Gum SCB-KP140.....	408
■ Aged Oak SCB-KP98.....	411	■ Charred Oak VGW102T.....	124	■ Honey Maple KP90.....	158	■ Niveus WP411.....	132
■ Aged Redwood VGW100T.....	100	■ Charred Weathered Pine RCP6539.....	377	■ Honey Oak SCB94.....	386	■ North American Oak RCP6533.....	370
■ Aged Redwood SCB100.....	388	■ Christchurch Oak SCB54.....	397	■ Honey Oak VGW94T.....	105	■ Ordo WP415.....	144
■ Aged Spanish Oak RCP6535.....	374	■ Christchurch Oak VGW54T.....	118	■ Ignea WP313.....	141	■ Oyster Oak RKP8202.....	346
■ Antique French Oak RKP8110.....	358	■ Classic Hickory EW13.....	52	■ Ivory Brushed Oak RKP8217.....	336	■ Pale Limed Oak KP94.....	164
■ Antique Heart Pine LLP303.....	289	■ Classic Limed Oak KP97.....	170	■ Jatoba SCB42.....	381	■ Pale Limed Oak SCB-KP94.....	406
■ Antique Karri SCB39.....	380	■ Classic Limed Oak SCB-KP97.....	407	■ Jatoba VGW42T.....	104	■ Palleo WP312.....	133
■ Antique Karri VGW39T.....	103	■ Classic Oak SCB86.....	391	■ Kenyan Tigerwood RP73.....	82	■ Pearl Oak LLP306.....	273
■ Antique Karri LLP39.....	282	■ Classic Oak VGW86T.....	112	■ Kilauaea Koa RKP8124.....	356	■ Providence LLP108.....	279
■ Aran Oak KP67.....	171	■ Coastal Driftwood RP100.....	86	■ Lancewood SCB44.....	389	■ Raven Oak LLP302.....	287
■ Argen WP414.....	148	■ Coffee Maple RL09.....	73	■ Lancewood VGW44T.....	111	■ Reclaimed Chestnut EW21.....	54
■ Arrado WP325.....	146	■ Copper Gum LLP33.....	275	■ Larne Oak KP69.....	173	■ Reclaimed French Oak RKP8109.....	354
■ Ashland LLP95.....	288	■ Copper Gum VGW33T.....	109	■ Lemon Spotted Gum LLP317.....	276	■ Reclaimed Heart Pine LLP305.....	283
■ Atra WP317.....	153	■ Country Oak SCB81.....	385	■ Lime Washed Cypress VGW95T.....	120	■ Reclaimed Maple SCB71.....	383
■ Aurum WP315.....	136	■ Country Oak VGW81T.....	99	■ Lime Washed Oak KP99.....	166	■ Reclaimed Maple VGW71T.....	101
■ Australian Walnut RP41.....	91	■ Country Oak LLP92.....	278	■ Lime Washed Oak SCB-KP99.....	405	■ Reclaimed Redwood SCB99.....	393
■ Autumn Oak RL03.....	70	■ Dawn Oak HC01.....	60	■ Limed Coastal Oak RCP6534.....	367	■ Reclaimed Redwood VGW99T.....	115
■ Baltic Coastal Oak RKP8236.....	342	■ Distressed American Pine LLP336.....	286	■ Limed Cotton Oak RP99.....	87	■ Rimu SCB49.....	387
■ Baltic Limed Oak RKP8111.....	344	■ Double Smoked Acacia RP105.....	93	■ Limed Jute Oak RP97.....	84	■ Rimu VGW49T.....	102
■ Baltic Washed Oak RKP8101.....	349	■ Dusk Oak HC03.....	61	■ Limed Linen Oak RP98.....	79	■ Rubra WP316.....	147
■ Bartley Oak RKP8206.....	350	■ Ebony SCB89.....	399	■ Limed Silk Oak RP96.....	85	■ Salvaged Barnwood RKP8209.....	360
■ Beach Driftwood RP101.....	90	■ Ebony VGW89T.....	126	■ Lorenzo Warm Oak RP91.....	83	■ Salvaged Barnwood SM-RKP8209.....	361
■ Bleached Grey Walnut WP329.....	139	■ Elm KP37.....	161	■ Luteus WP321.....	142	■ Salvaged Chestnut EW22.....	56
■ Blended Oak RP95.....	89	■ French Grey Oak LLP308.....	278	■ Macrocapra VGW50T.....	96	■ Salvaged Redwood VGW101T.....	122
■ Boston LLP111.....	270	■ French Oak SCB85.....	382	■ Magna WP413.....	137	■ Santana Cherry RL07.....	74
■ Bracken VGI-7.....	116	■ French Oak VGW85T.....	97	■ Marron Elm RCP6543.....	373	■ Savannah Oak RL23.....	66
■ Braemar Oak RKP8238.....	353	■ Ghost Elm RCP6544.....	368	■ Melbourne Larch VGW40T.....	98	■ Scorched Oak RP94.....	92
■ Bray Oak KP70.....	175	■ Glacier Oak RL21.....	64	■ Merbau LLP91.....	289	■ Shadow Fabric Oak LLP331.....	277
■ Burgundy Oak VGW92T.....	110	■ Glacier Oak SM-RL21.....	65	■ Merbau SCB41.....	395	■ Shadow Oak RKP8203.....	347
■ Burlington LLP110.....	284	■ Glenmore Oak RKP8237.....	352	■ Merbau VGW41T.....	119	■ Sienna KP107.....	172
■ Burnished Beech VGW97T.....	127	■ Golden Teak WP513.....	143	■ Mid Limed Oak KP96.....	169	■ Single Smoked Acacia RP104.....	88
■ Burnished Cypress VGW96T.....	121	■ Grano WP311.....	131	■ Mid Limed Oak SCB-KP96.....	410	■ Smoked American Maple RCP6545.....	372
■ Burnt Ginger LLP5-7.....	287	■ Grey Limed Oak KP138.....	165	■ Midnight Oak HC06.....	63	■ Smoked Beech VGW98T.....	125
■ Burnt Ginger VG5-7.....	106	■ Grey Limed Oak SCB-KP138.....	404	■ Millstone Sycamore RCP6546.....	366	■ Smoked Butternut RKP8107.....	351
■ Cambridge LLP113.....	281	■ Grey Oiled Oak RCP6541.....	375	■ Native Koa KP93.....	174	■ Smoked Koa RKP8126.....	355
■ Canadian Maple RP61.....	78	■ Grey Scandi Pine KP131.....	157	■ Natural Koa RKP8122.....	357	■ Smoked Oak VGW70T.....	114
■ Canadian Urban Oak RKP8116.....	340	■ Grey Scandi Pine SCB-KP131.....	403	■ Natural Oak RP102.....	80	■ Smoked Oak SCB70.....	394
■ Canadian Urban Oak SM-RKP8116.....	341	■ Hartford LLP112.....	272	■ Natural Oiled Oak RCP6536.....	371	■ Spanish Cherry RL05.....	75
■ Canitia WP322.....	138	■ Harvest Oak RP103.....	81	■ Natural Walnut WP326.....	145	■ Spring Oak RL01.....	67
■ Carbo WP318.....	151	■ Hessian Oak SCB93.....	392	■ Neutral Oak LLP307.....	282	■ Stamford LLP109.....	277
■ Cathedral Oak RKP8114.....	359	■ Hessian Oak VGW93T.....	113			■ Storm Oak RL12.....	68

Wood (cont.)

■ Summer Oak RL02.....	69
■ Sundown Oak HC04.....	62
■ Sycamore KP32.....	159
■ Sylva WP417.....	149
■ Tasmanian Wattle LLP38.....	283
■ Taupe Oak LLP309.....	280
■ Tawny Oak SCB91.....	398
■ Tawny Oak VGW91T.....	123
■ Tenebra Walnut WP330.....	150
■ Tergo WP324.....	152
■ Texas White Ash RKP8105.....	338
■ Texas White Ash SM-RKP8105.....	339
■ Textum WP331.....	130
■ Toasted Maple RL11.....	72
■ Twilight Oak LLP301.....	285
■ Urban Fabric Oak LLP332.....	284
■ Urban Spotted Gum KP141.....	168
■ Urban Spotted Gum SCB-KP141.....	409
■ Vanilla Oak LLP333.....	272
■ Vintage Hickory EW12.....	55
■ Vintage Oregon Oak RCP6531.....	376
■ Vintage Pine VGW76T.....	108
■ Vintage Pine SCB76.....	384
■ Walnut KP36.....	163
■ Warm Ash RKP8103.....	343
■ Warm Brushed Oak RKP8215.....	345
■ Warm Oak KP39.....	162
■ Washed Butternut RKP8108.....	337
■ Washed Grey Ash RKP8104.....	348
■ Washed Velvet Ash RKP8102.....	362
■ Washed Walnut WP328.....	140
■ Weathered American Pine LLP335.....	281
■ Weathered Elm WP511.....	135
■ Weathered Heart Pine LLP304.....	275
■ Weathered Hickory EW11.....	53
■ Weathered Oak RCP6532.....	369
■ Wellington Oak VGW53T.....	107
■ Wellington Oak SCB53.....	390
■ White Painted Pine KP105.....	156
■ White Painted Pine SCB-KP105.....	402
■ Winter Oak RL04.....	71
■ Worn Fabric Oak LLP330.....	279

Stone

■ Aged Parchment RKT3011-G.....	421
■ Antique Copper RKT3002-G.....	429
■ Alderney LM03.....	192
■ Alpine Lace RKT2408.....	418
■ Andecite T89.....	239
■ Arctic Mist RKT3005-G.....	419
■ Aurego SP716.....	224
■ Bath Stone ST12.....	235
■ Black Sands RKT3006-G.....	430
■ Brunella Marble RKT3013-G.....	414
■ Brunella Marble SM-RKT3013-G.....	415
■ Burnet CER19.....	204
■ Caldera LM08.....	184
■ Caldera LM28.....	185
■ Cambria CER20.....	201
■ Canberra LM06.....	189
■ Capri LLT209.....	311
■ Carbon CER14.....	211
■ Carrara T90.....	232
■ Casablanca SP219.....	221
■ Clarus SP714.....	223
■ Clifton CLIF-01.....	226
■ Clifton CLIF-04.....	227
■ Coastal Fog RKT3004-G.....	426
■ Colorado LLT201.....	313
■ Copper T84.....	240
■ Corris LM22.....	186
■ Cumbrian Stone ST14.....	241
■ Dakota LLT212.....	317
■ Drift CER17.....	205
■ Dune CER15.....	200
■ Eisen CER13.....	206
■ Ferra SP215.....	217
■ Fiore LM16.....	190
■ Fumo SM-SP216.....	218
■ Fumo SP216.....	219
■ Gallatin LM09.....	182
■ Gallatin LM29.....	183
■ Georgia LLT206.....	315
■ Grey Riven Slate SCB-ST16.....	436
■ Grey Riven Slate ST16.....	238
■ Guernsey LM02.....	194
■ Herm LM20.....	195

■ Honed Oyster Slate SCB-ST17.....	434
■ Honed Oyster Slate ST17.....	233
■ Indiana LLT202.....	310
■ Iron Ore CER12.....	209
■ Jersey LM01.....	193
■ Lutum SP218.....	220
■ Maine LLT213.....	312
■ Marrakesh SP220.....	222
■ Mayfair MAYF-01.....	228
■ Mayfair MAYF-02.....	229
■ Melbourne LM05.....	187
■ Metro Grey RKT3007-G.....	420
■ Midnight Black T74.....	242
■ Molten CER11.....	208
■ Montana LLT203.....	318
■ Mountain Slate RKT3003-G.....	424
■ Nero SP115.....	214
■ Oakeley LM21.....	188
■ Ontario LLT218.....	314
■ Otono LM15.....	191
■ Oxford Grey RKT3008-G.....	428
■ Oxide CC08.....	207
■ Palazzo Marble RKT3012-G.....	416
■ Palazzo Marble SM-RKT3012-G.....	417
■ Pebble Grey RKT3009-G.....	425
■ Piazza Limestone LST03.....	198
■ Portland Stone SCB-ST13.....	435
■ Portland Stone ST13.....	237
■ Rona T99.....	236
■ Sable CER16.....	203
■ Sandstorm RKT3010-G.....	423
■ Santi Limestone LST05.....	202
■ Seattle LLT214.....	309
■ Shadow Lace RKT2407.....	422
■ Sindon CER21.....	210
■ Soapstone ST5.....	234
■ Spirito Limestone LST04.....	199
■ Terra SP212.....	215
■ Texo SP718.....	225
■ Tino LLT208.....	308
■ Urbus SP213.....	216
■ Vermont LLT217.....	316
■ Volcanic Slate RKT3001-G.....	427

■ Vulcano LLT211.....	319
■ Washburn LM07.....	180
■ Washburn LM27.....	181

